



TELECOM REGULATORY AUTHORITY OF INDIA

Independent Drive Test Report

UP West LSA

July 2026

Contents

1. Introduction	3
2. Executive Summary (LSA)	3
2.1 Drive test details	3
2.2 Drive test routes	4
2.3 Summary of areas covered	4
2.4 Telecom service providers detected frequency bands	5
2.5 Performance against key QoS parameters	5
3. QoS performance analysis-LSA level	6
3.1 Overview	7
3.2 Voice performance	7
3.3 Data performance	10
4. Detailed QoS performance analysis	12
4.1 Overview	12
4.2 City	12
4.2.1 Drive test route	12
4.2.2 Areas covered	12
4.2.3 Voice performance	13
4.2.4 Data performance	21
4.3 Hotspots	25
4.3.1 Locations	25
4.3.2 Hotspot covered	25
4.3.3 Voice performance	25
4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)	27
4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)	30
4.4 Walk Test	32
4.4.1 Walk test locations	32
4.4.2 Walk Test Covered	32
4.4.3 Voice Performance	32
4.4.4 Data Performance	33
5. Voice & Data Key findings	34
5.1 Overall Voice	34
5.2 Overall Data	34
5.3 Operator wise Key Findings	35
6. Annexure	38

6.1 Route wise coverage map	38
6.1.1 City	38
7. Appendix	44
7.1 Appendix-I	44
7.1.1 Drive test setup	44
7.1.2 Drive test Methodology	46
7.2 Appendix-II	48
7.2.1 Network Performance Parameters for Voice calls	48
7.2.2 Network Performance Parameters Data tests	49

1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet the required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interests of the consumers of telecommunications services.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

2. Executive Summary (LSA)

2.1 Drive test details

This report covers the findings of the IDT undertaken in UP West License Service Area (LSA) during the month of June & July-2026 under the supervision of TRAI Regional Office (RO) Bhopal. Details of route/area covered during the IDT are as given below:

S. No	Drive test route	Type of route	Distance covered (KMs)	From date	To date
1	Haridwar and Rishikesh Cities & nearby areas	City	281.4	29-Jun-2026	01-Jul-2026
2	Rishikesh	Inter Operator Calling	10.9 & 2 Locations	01-Jul-2026	01-Jul-2026
3	Haridwar and Rishikesh Cities & nearby areas	Hotspot	7 Locations	29-Jun-2026	01-Jul-2026
4	Haridwar and Rishikesh	Walk test	1.4	29-Jun-2026	01-Jul-2026

Table-1: Drive test summary

Note-

- Data testing was also carried out with inter-operator calling during the dynamic drive test.
- Inter-operator calling tests were conducted in both static and dynamic scenarios.

2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, Inter-operator call test, hotspots and walk test as per the legends shown on the map.

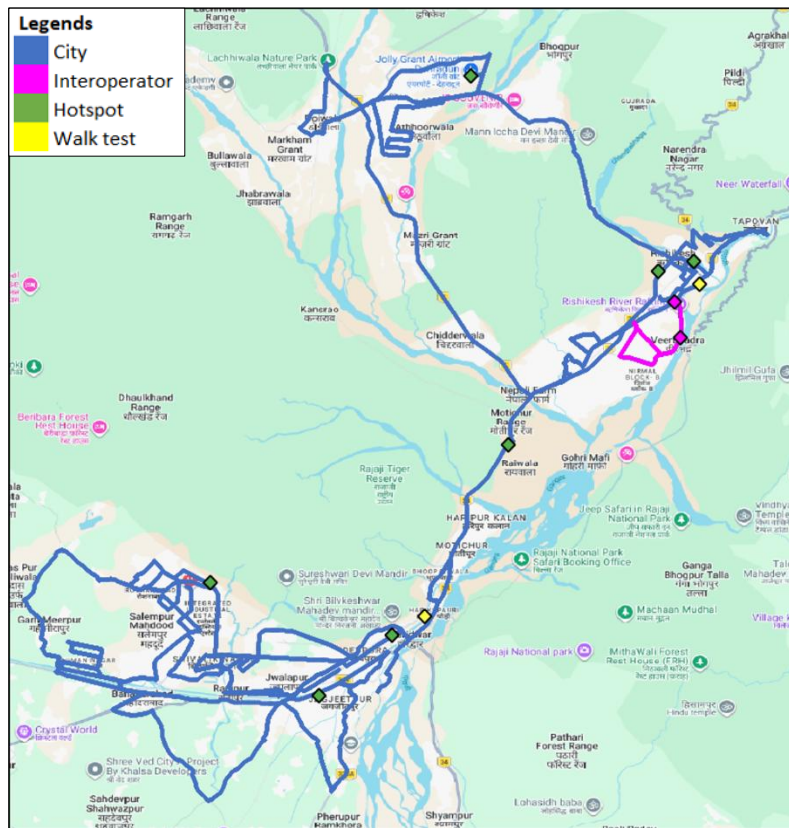


Figure-1: Drive test routes

2.3 Summary of areas covered

a) City- Doiwala, Jolly Grant, Rishikesh, Tapovan, Veerbhadra, Nepali Farm, Raiwala, Haridwar, Jwalapur, Bahadrabad, Salempur Mahdood, Devpura, Ranipur and Sitapur etc.

b) Hotspot

1. District Collectorate Office - Haridwar
2. Gurukul Kangri Vishwavidyalaya
3. Haridwar Railway Station
4. Jolly Grant Airport - Dehradun
5. Raiwala Junction Railway Station
6. Rishikesh Bus Stand
7. Yog Nagari Rishikesh Railway Station

c) Walk Test

1. Har Ki Pauri Ganga Ghat - Haridwar
2. Triveni Ganga Ghat - Rishikesh

2.4 Telecom service providers detected frequency bands


Technologies covered during the IDT and frequency bands in use are summarised in table below:

S.no.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	1800
2	Bharti Airtel Ltd.	4G	850,1800,2100,2300
3	Bharti Airtel Ltd.	5G	3500
4	BSNL	2G	900
5	BSNL	3G	2100
6	BSNL	4G	700,2100,2500
7	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
8	Reliance JIO Infocomm Ltd.	5G	700,3500
9	Vodafone Idea Ltd.	2G	900
10	Vodafone Idea Ltd.	4G	900,1800,2100,2500
11	Vodafone Idea Ltd.	5G	3500

Table-2: Telecom service provider (TSP) covered in IDT

2.5 Performance against key QoS parameters

CSSR: Call Setup Success Rate (in %), CST: Call Setup Time (in seconds), DCR: Drop Call Rate (in %) & MOS: Mean Opinion Score.

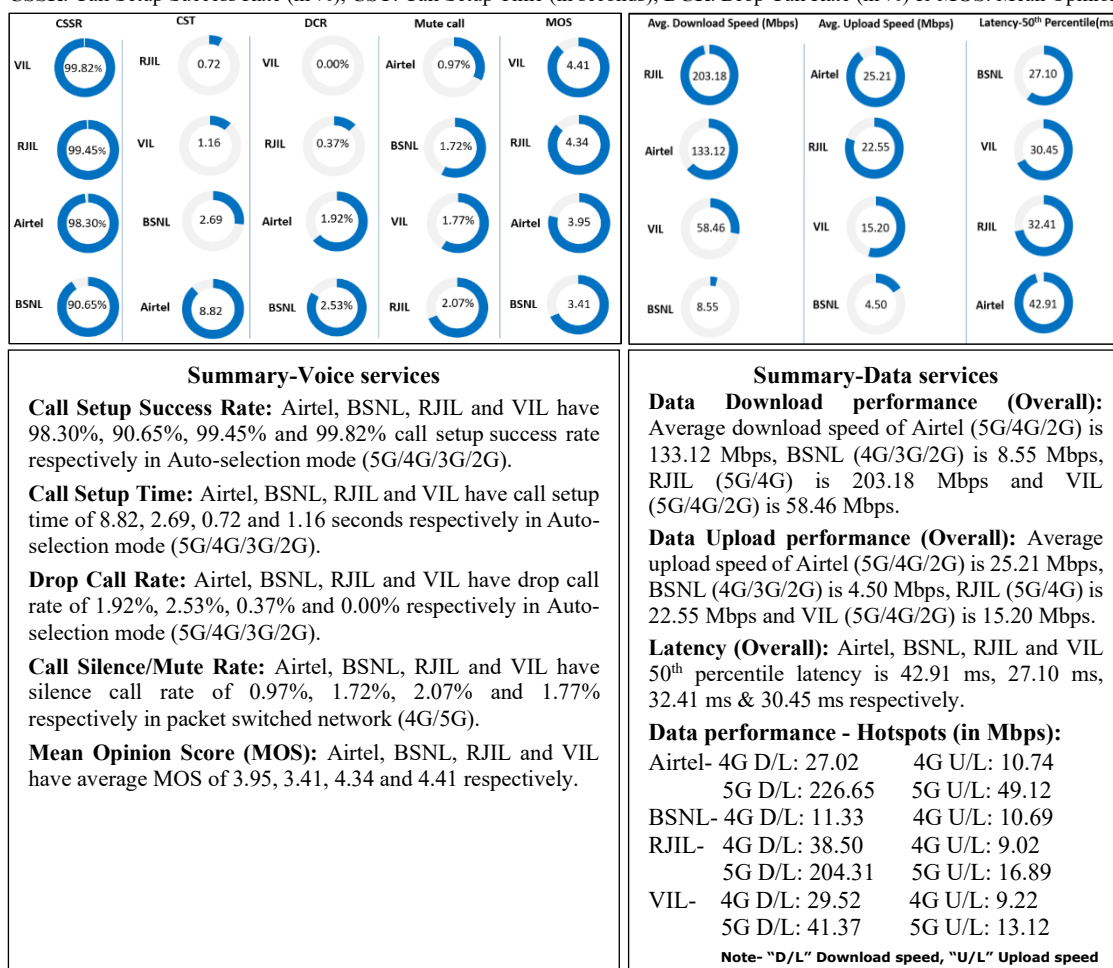

- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **voice** testing has been observed in 3.04%, 7.84%, 5.39% & 1.89% of the **City IDT route** in case of Airtel, BSNL, RJIL and VIL respectively. {refer **figure- 33 to 36** as per the **Section 6.1** under Para-6 (Annexure)}
- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **data** testing has been observed in 7.63%, 27.59%, 17.62% & 6.33% of the **City IDT route** in case of Airtel, BSNL, RJIL and VIL respectively. {refer **figure- 37 to 40** as per the **Section 6.1** under Para-6 (Annexure)}

QoS Performance Analysis- UP West LSA

3. QoS performance analysis-LSA level

3.1 Overview

This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the UP West LSA during the month of June & July-2026 covering city drive, hotspots and walk test. (Refer Table 1)

3.2 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	418	457	428
Call Setup Success Rate %	97.37	96.28	99.30
Drop Call Rate %	0.25	4.32	0.47
Call Setup Time-Average (Second)	8.91	2.69	4.52
Handover Success Rate %	96.12	98.59	99.16

Table-3: Summary of voice call performance in 3G/2G network mode only.

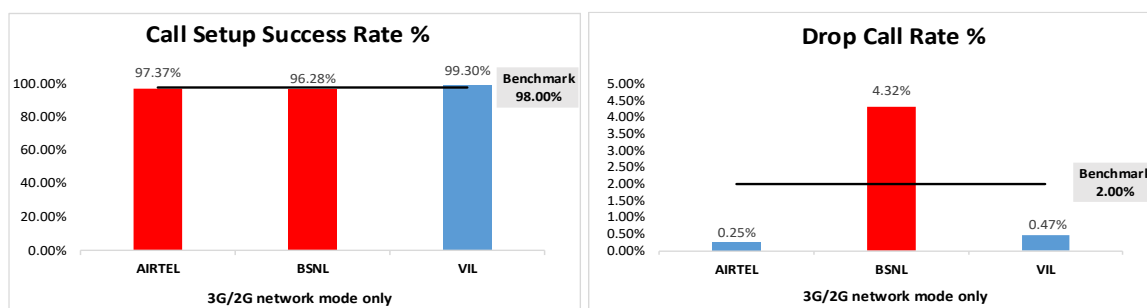


Figure-2: Call setup success rate and drop call rate performance.

Number of unique cell Id's covered in Voice test- Technology wise			
Technology	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
3G	NA	128	NA
2G	550	142	411

Table-4: Technology wise number of network cell Id's latched during drive test.

Note-

- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.

(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	529	567	548	544
Call Setup Success Rate %	98.30	90.65	99.45	99.82
Drop Call Rate %	1.92	2.53	0.37	0.00
Call Setup Time-Average (Second)	8.82	2.69	0.72	1.16
Handover Success Rate %	99.91	99.63	99.70	100.00

Table-5: Summary of voice call performance in network auto-selection mode.

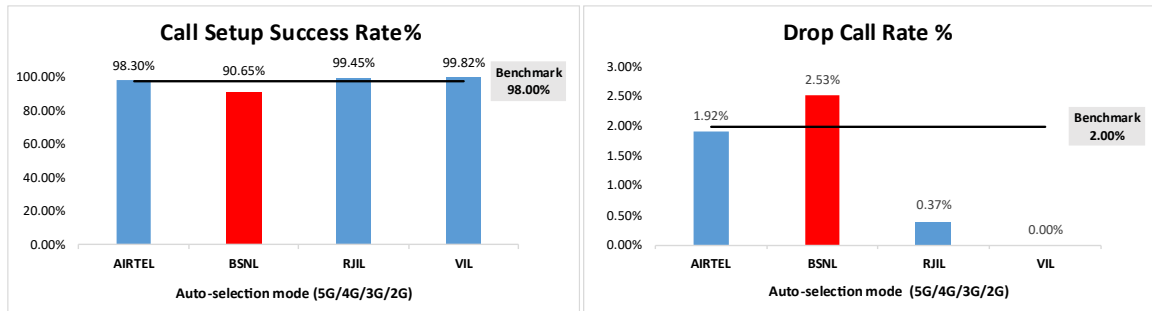


Figure-3: Performance for call setup success rate and drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	414	408	435	451
Number of silences call for >4 Sec	4	7	9	8
Silence Call Rate %	0.97	1.72	2.07	1.77
Number of silence instances for >4 Sec	5	7	13	9
Number of silence instances for >3 Sec	9	21	18	12
Number of silence instances for >2 sec	21	38	42	46
RTP Jitter (4G & 5G) in ms	4.91	5.02	16.68	14.60
Packet loss Rate Downlink %	0.67	3.72	2.40	0.86
Packet loss Rate Uplink %	0.69	2.46	1.49	0.55

Table-6: Summary of silence instances & packet loss rate for mobile to mobile calls.

Number of unique cell Id's covered in Voice test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	539	0
4G	1007	344	746	630
3G	NA	7	NA	NA
2G	182	44	NA	8

Table-7: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

(c) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile-to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls table-6	2464	2309	2522	2580
Speech Quality (Average MOS)	3.95	3.41	4.34	4.41
Number of samples with MOS ≥ 4 to <5 (Excellent)	1912	1207	2101	2169
Number of samples with MOS ≥ 3 to <4 (Good)	449	312	218	319
Number of samples with MOS ≥ 2 to <3 (Fair)	56	455	71	58
Number of samples with MOS ≥ 1 to <2 (Poor)	47	335	132	34
%age of samples with MOS ≥ 4 to <5 (Excellent)	77.60%	52.27%	83.31%	84.07%
%age of samples with MOS ≥ 3 to <4 (Good)	18.22%	13.51%	8.64%	12.36%
%age of samples with MOS ≥ 2 to <3 (Fair)	2.27%	19.71%	2.82%	2.25%
%age of samples with MOS ≥ 1 to <2 (Poor)	1.91%	14.51%	5.23%	1.32%

Table-8: Summary of speech quality (MOS) samples.

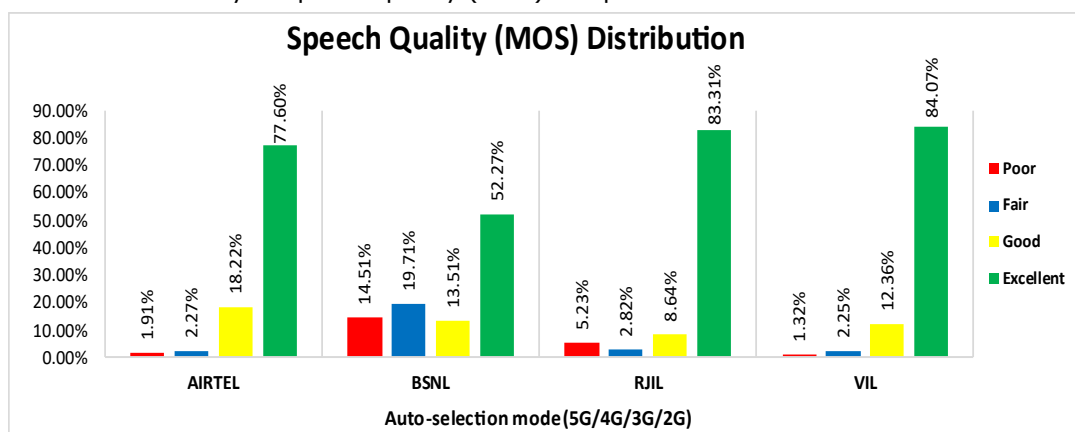


Figure- 4: Distribution of samples in MOS range.

(d) Inter-service provider voice call performance: To check the performance of inter-service providers call setup success rate, total 52 to 63 inter operator calls were attempted at 2 locations which are Shri Dev Suman Uttarakhand University and AIIMS Rishikesh. Additionally, testing was conducted during dynamic drive tests in Rishikesh. The call setup success rate and call setup time observation are as below.

Call Setup Success Rate %				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	96.30	100.00	98.25
BSNL	92.98	NA	89.09	96.15
RJIL	100.00	100.00	NA	100.00
VIL	100.00	96.43	100.00	NA

Table-9: Call setup success rate across service providers

Note-

- NA- Only inter-operator calls were measured during test.

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	4.59	1.37	1.76
BSNL	3.26	NA	2.74	2.64
RJIL	1.81	4.44	NA	1.56
VIL	2.37	4.28	1.46	NA

Table-10: Call setup time across service providers.

Note-

- NA- Only inter-operator calls were measured during test.

3.3 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	133.12	8.55	203.18	58.46
	80th Percentile	224.68	15.42	345.03	95.55
	20th Percentile	29.96	2.55	35.33	14.48
Upload Throughput (Mbits/s)	Average	25.21	4.50	22.55	15.20
	80th Percentile	42.51	8.73	41.88	24.95
	20th Percentile	4.68	1.22	3.16	4.36
Latency (ms)	50th Percentile	42.91	27.10	32.41	30.45

Table-11: Summary of data performance in network auto-selection mode.

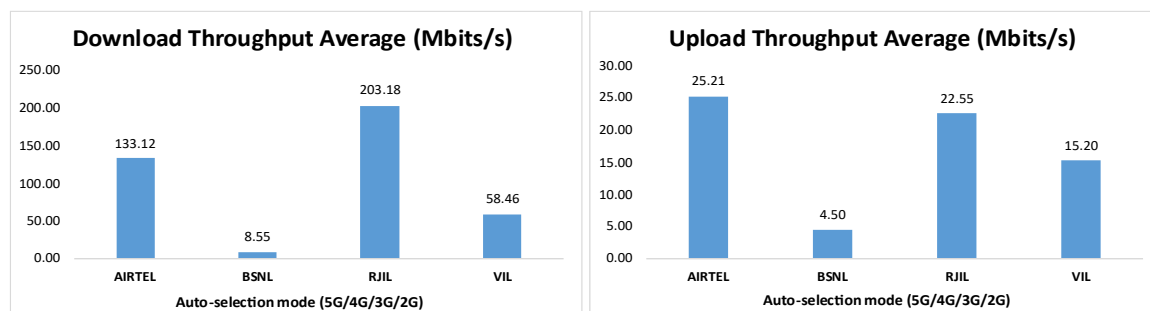


Figure- 5: Download and Upload throughput

Number of unique cell Id's covered in Data test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	580	0
4G	1306	351	537	731
3G	NA	51	NA	NA
2G	5	13	NA	8

Table-12: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

Detailed QoS Performance Analysis

4. Detailed QoS performance analysis

4.1 Overview

This section covers analysis on performance of various categories of drives like city, hotspots and walk test for all telecom service providers, the results of drive tests conducted are shown individually for respective areas/locations.

4.2 City

Drive test has been conducted from 29th June 2026 to 1st July 2026 in Haridwar and Rishikesh Cities & nearby areas. (Refer Table-1)

4.2.1 Drive test route

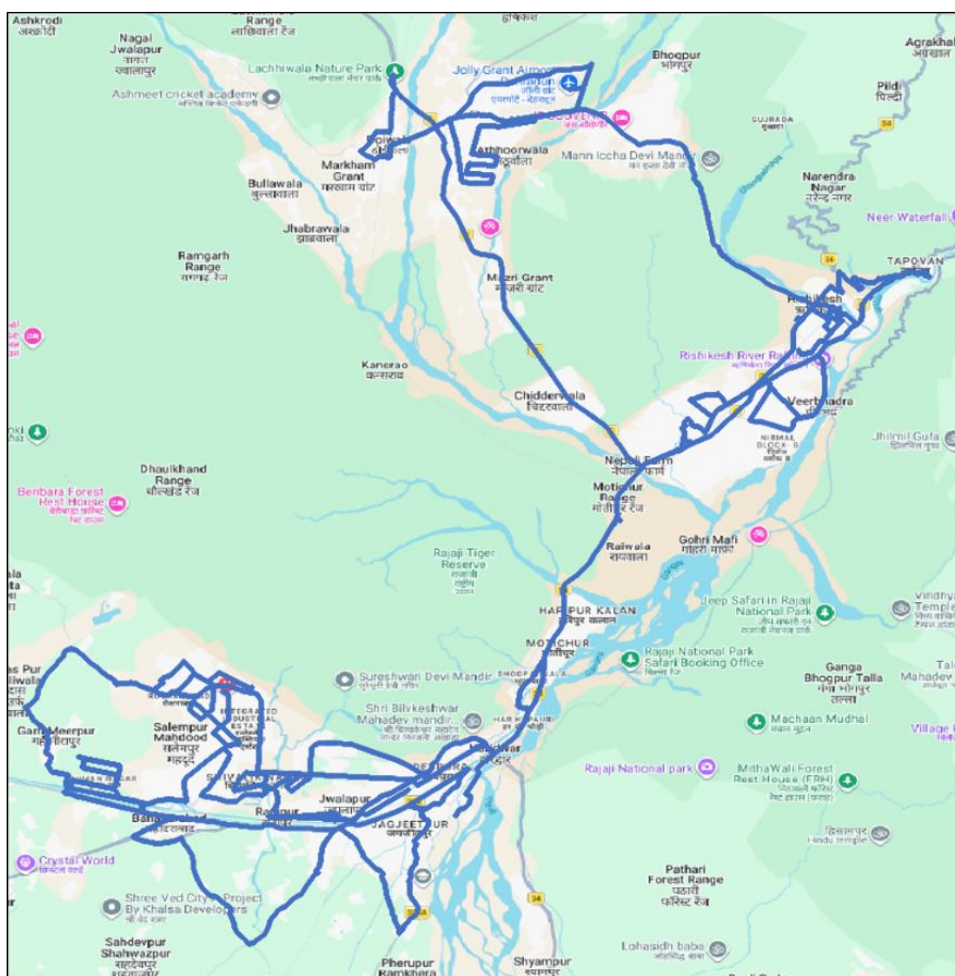


Figure- 6: Drive test routes

4.2.2 Areas covered

Doiwala, Jolly Grant, Rishikesh, Tapovan, Veerbhadra, Nepali Farm, Raiwala, Haridwar, Jwalapur, Bahadradab, Salempur Mahdood, Devpura, Ranipur, Sitapur etc.

4.2.3 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	418	457	428
Call Setup Success Rate %	97.37	96.28	99.30
Drop Call Rate %	0.25	4.32	0.47
Call Setup Time-Average (Second)	8.91	2.69	4.52
Handover Success Rate %	96.12	98.59	99.16

Table-13: Summary of voice call performance in 3G/2G network mode only.

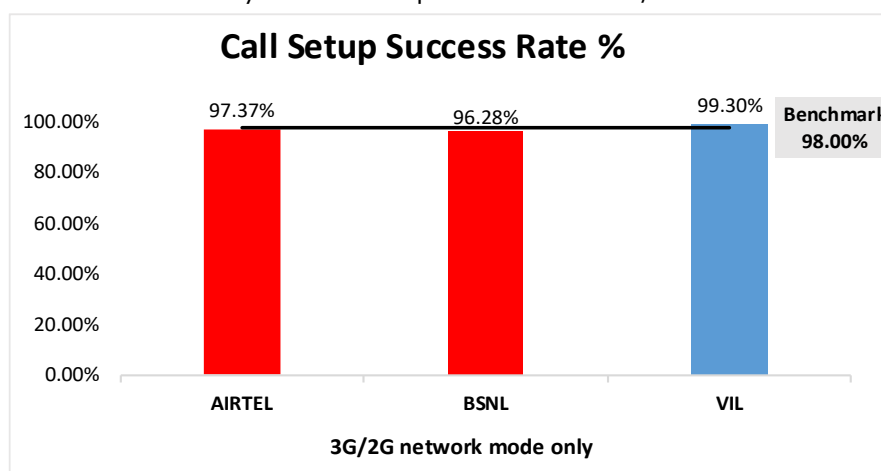


Figure-7: Performance for call setup success rate.

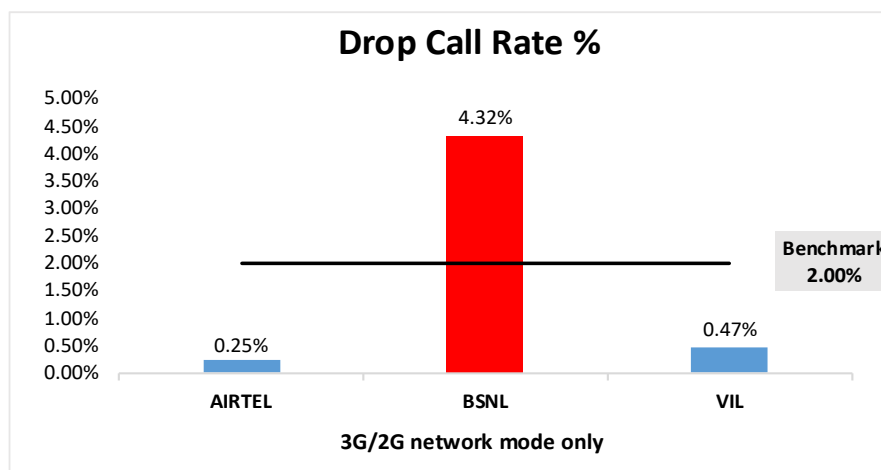


Figure-8: Performance for drop call rate.

(b) Network Technology: This section represent time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	39.63%	NA
2G	99.72%	60.35%	99.88%
Limited Service	0.28%	0.02%	0.12%

Table-14: Time spent on technology during drive test 3G/2G network mode.

Note-

- NA- Service provider doesn't provide services in respective technology.

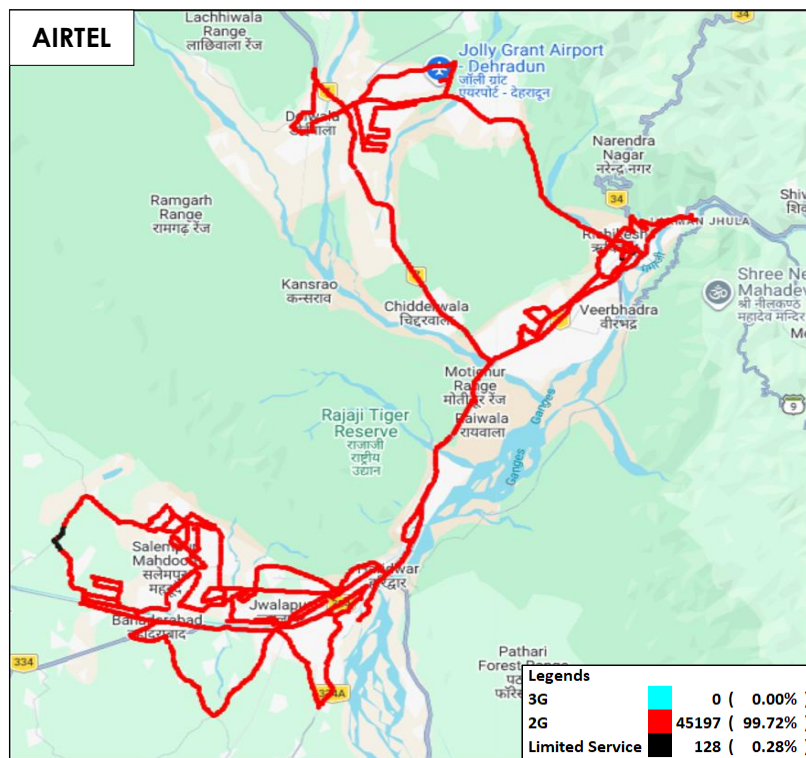


Figure-9: Serving technology plots 3G/2G network mode - AIRTEL

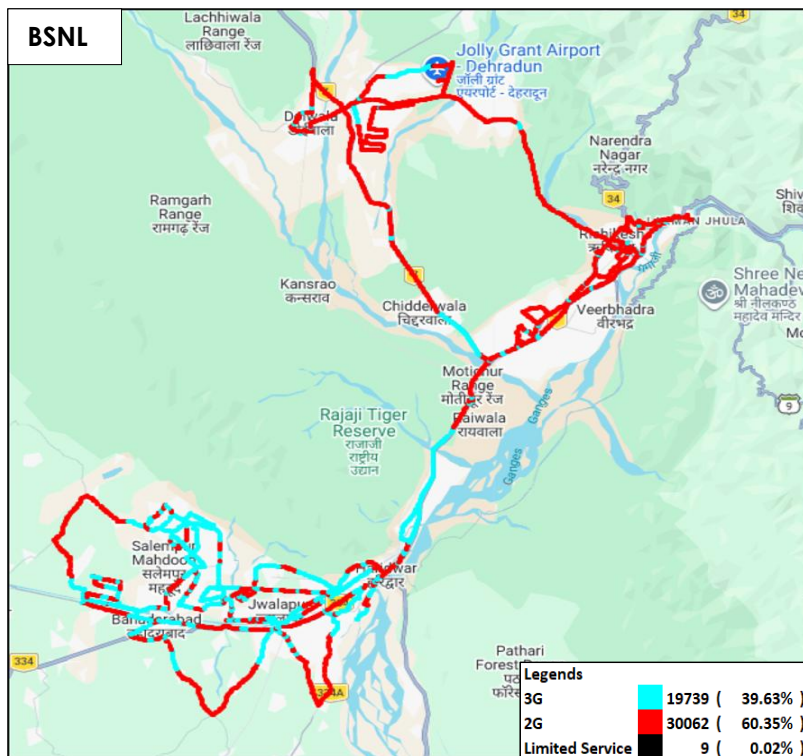


Figure-10: Serving technology plots 3G/2G network mode - BSNL.

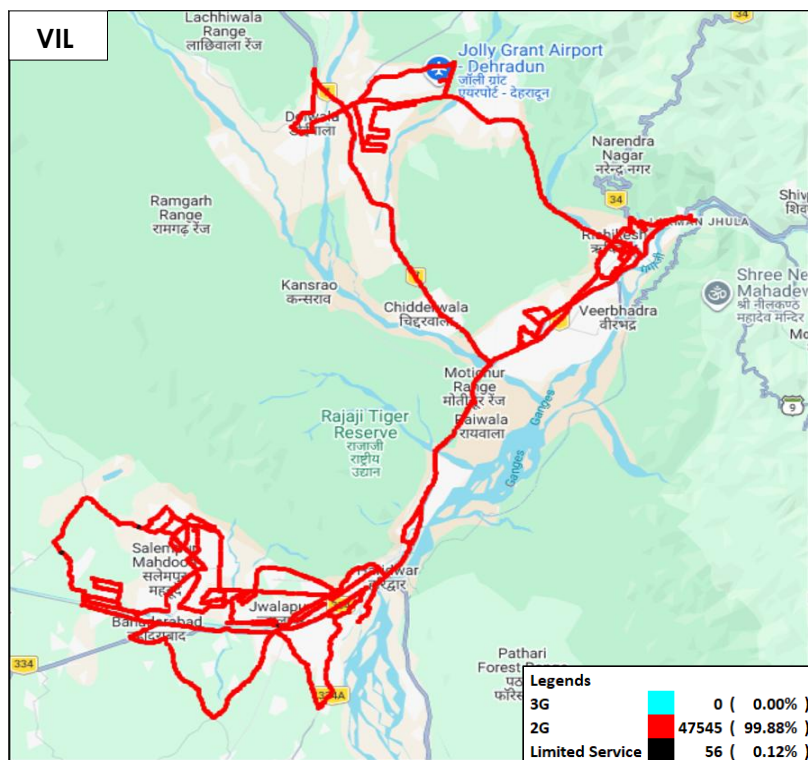


Figure-11: Serving technology plots 3G/2G network mode - VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 30, 31 & 32 for map view)

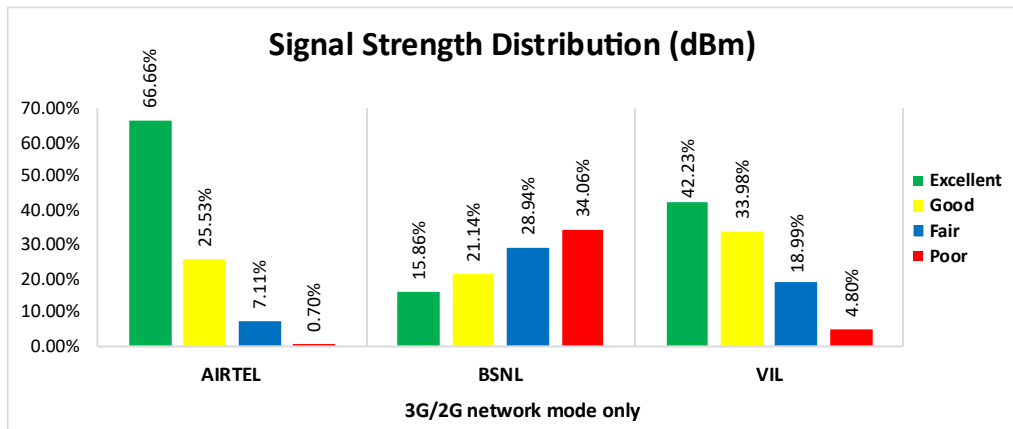


Figure-12: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 67% of samples falling in the excellent signal strength category.
- BSNL has 16% of samples falling in the excellent signal strength category.
- VIL has 42% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	439	475	456	452
Call Setup Success Rate %	97.95	89.68	99.34	99.78
Drop Call Rate %	2.33	3.05	0.44	0.00
Call Setup Time Average (Second)	8.05	2.69	0.74	1.17
Handover Success Rate %	99.91	99.61	99.70	100.00

Table-15: Summary of voice call performance in network auto-selection mode.

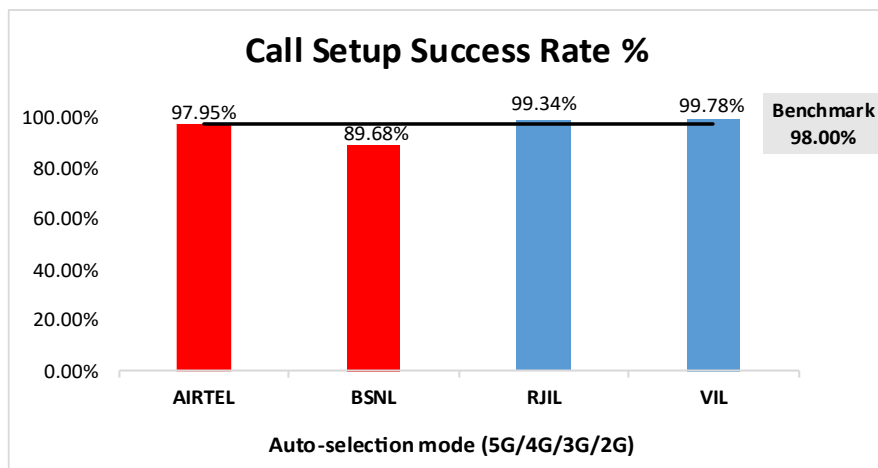


Figure-13: Performance for call setup success rate.

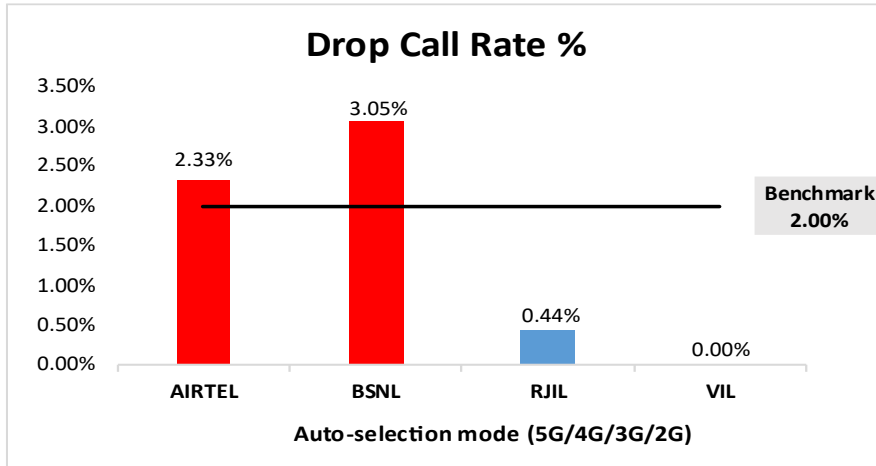


Figure-14: Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	414	408	435	451
Number of silences call for >4 Sec	4	7	9	8
Silence Call Rate %	0.97	1.72	2.07	1.77
Number of silence instances for >4 Sec	5	7	13	9
Number of silence instances for >3 Sec	9	21	18	12
Number of silence instances for >2 sec	21	38	42	46
RTP Jitter (4G & 5G) in ms	4.91	5.02	16.68	14.60
Packet loss Rate Downlink %	0.67	3.72	2.40	0.86
Packet loss Rate Uplink %	0.69	2.46	1.49	0.55

Table-16: Summary of silence instances & packet loss rate for mobile to mobile call.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS value means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-16	2464	2309	2522	2580
Speech Quality (Average MOS)	3.95	3.41	4.34	4.41
Number of samples with MOS >=4 to <5 (Excellent)	1912	1207	2101	2169
Number of samples with MOS >=3 to <4 (Good)	449	312	218	319
Number of samples with MOS >=2 to <3 (Fair)	56	455	71	58
Number of samples with MOS >=1 to <2 (Poor)	47	335	132	34
%age of samples with MOS >=4 to <5 (Excellent)	77.60%	52.27%	83.31%	84.07%
%age of samples with MOS >=3 to <4 (Good)	18.22%	13.51%	8.64%	12.36%
%age of samples with MOS >=2 to <3 (Fair)	2.27%	19.71%	2.82%	2.25%
%age of samples with MOS >=1 to <2 (Poor)	1.91%	14.51%	5.23%	1.32%

Table-17: Summary of speech quality (MOS) samples.

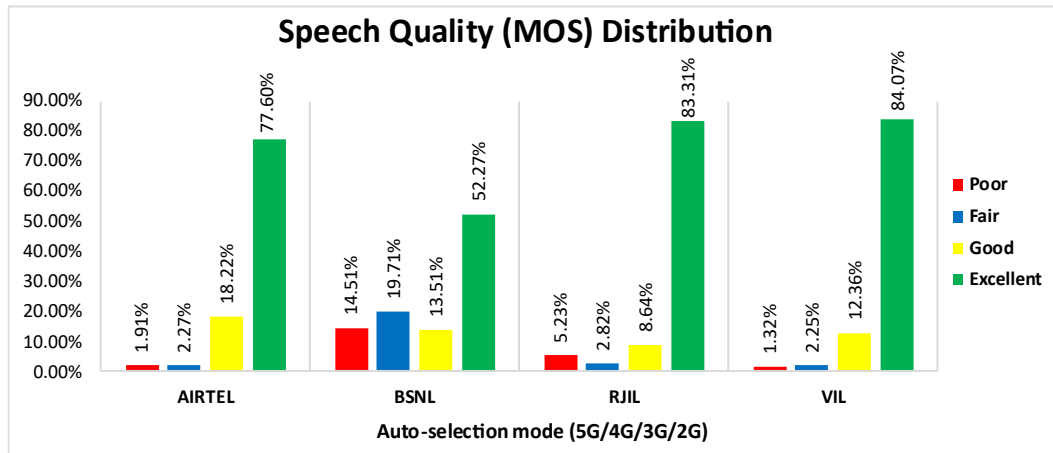


Figure-15: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	5.47%	NA	69.34%	1.68%
4G	75.24%	89.36%	30.56%	96.91%
3G	NA	1.96%	NA	NA
2G	19.23%	8.60%	NA	1.41%
Limited Service	0.06%	0.07%	0.10%	0.00%

Table-18: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice .

Note-

- NA- Service provider doesn't provide services in respective technology.

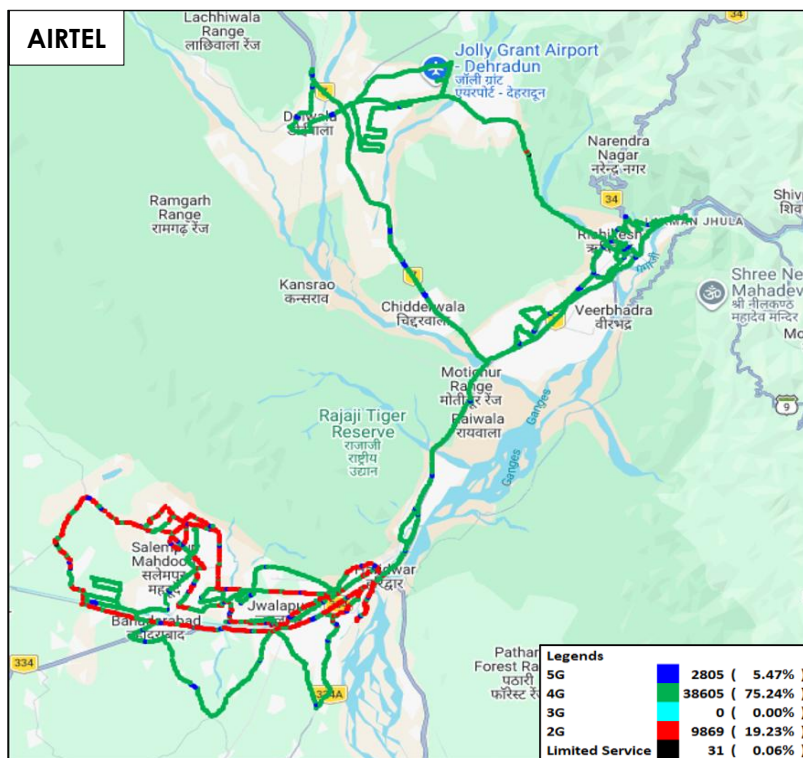


Figure-16: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

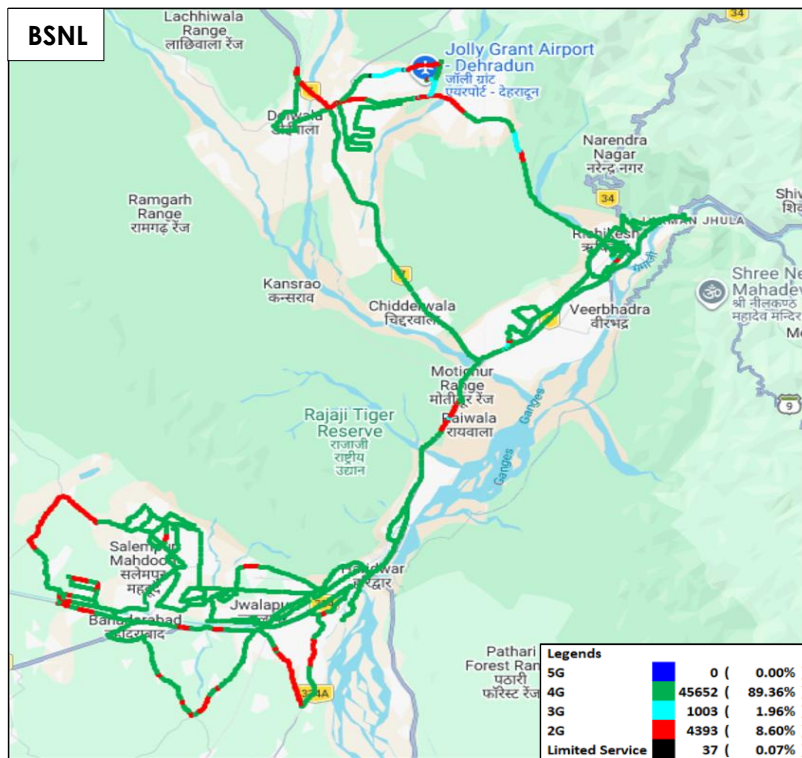


Figure-17: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

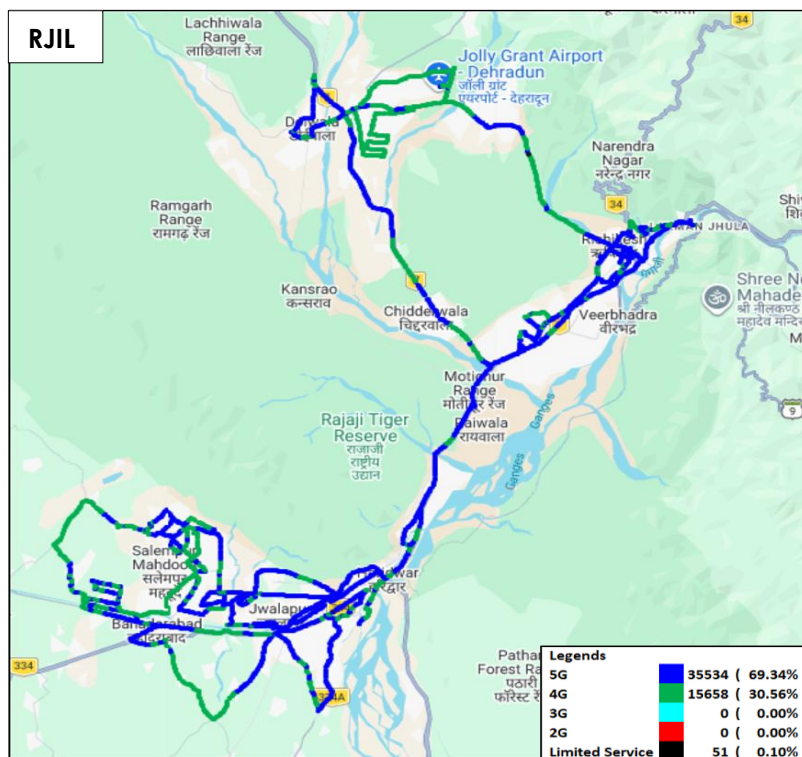


Figure-18: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

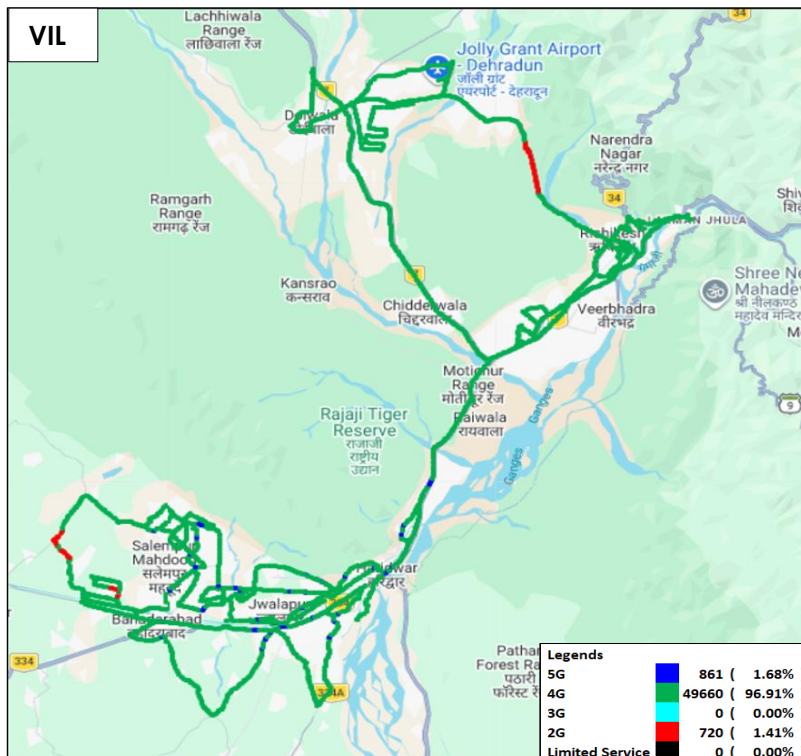


Figure-19: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - VIL.

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) voice. (Refer figure-33, 34, 35 & 36 for map view)

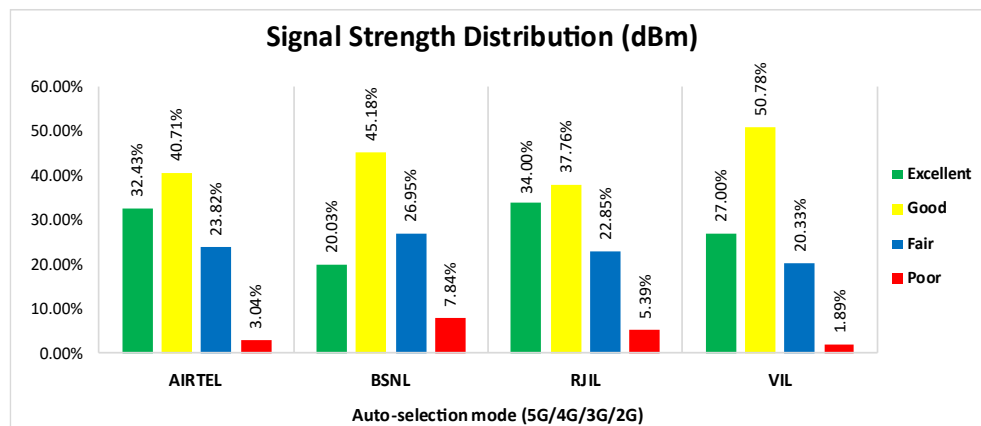


Figure-20: Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

Observations:

- Airtel has 32% of samples falling in the excellent signal strength category.
- BSNL has 20% of samples falling in the excellent signal strength category.
- RJIL has 34% of samples falling in the excellent signal strength category.
- VIL has 27% of samples falling in the excellent signal strength category.

4.2.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	128.99	7.96	205.57	58.46
	80th Percentile	219.20	13.12	349.19	96.16
	20th Percentile	30.60	2.37	37.58	14.01
Upload Throughput (Mbits/s)	Average	24.54	4.11	23.21	14.79
	80th Percentile	41.71	7.23	43.45	24.22
	20th Percentile	4.67	1.22	3.44	4.26
Latency (ms)	50th Percentile	43.13	29.78	31.10	29.79

Table-19: Summary of Data performance in network auto-selection mode.

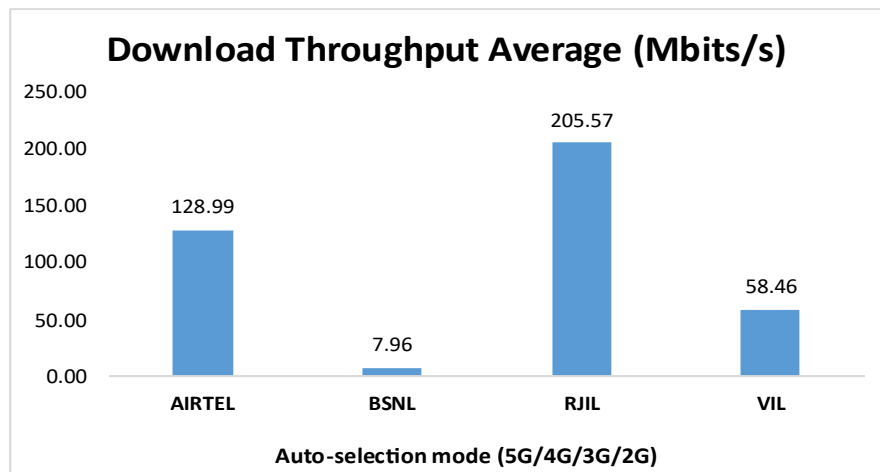


Figure- 21: Download throughput

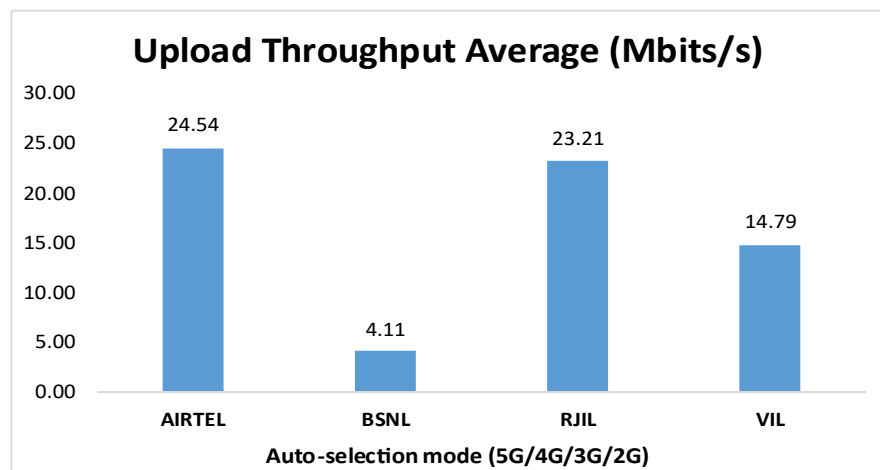


Figure- 22: Upload throughput

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	73.74%	NA	79.43%	23.20%
4G	25.97%	63.68%	20.00%	76.09%
3G	NA	30.97%	NA	NA
2G	0.07%	4.65%	NA	0.41%
Limited Service	0.21%	0.71%	0.57%	0.30%

Table-20: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

Note-

- NA- Service provider doesn't provide services in respective technology.

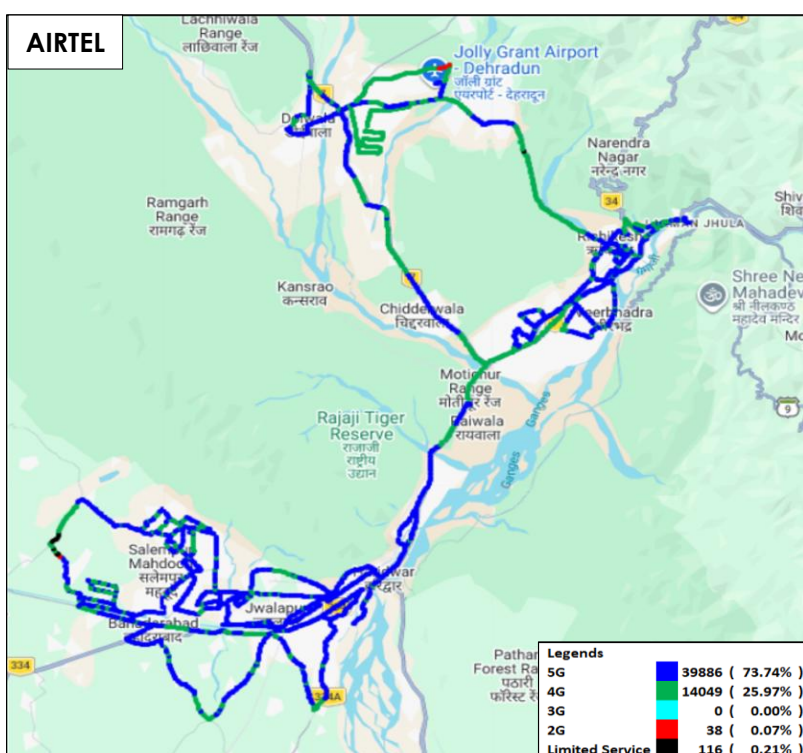


Figure-23: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

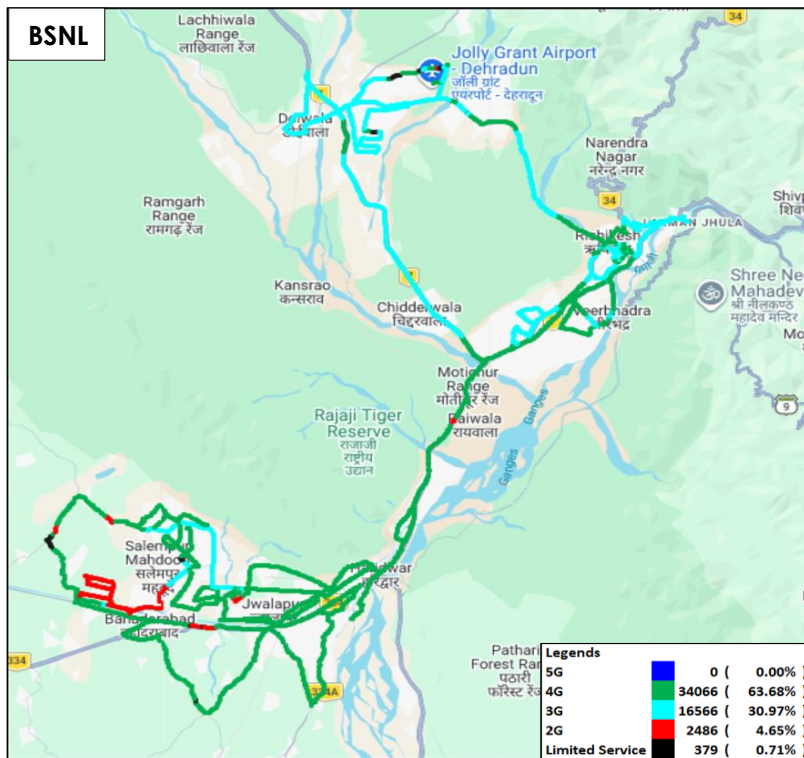


Figure-24: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - BSNL.

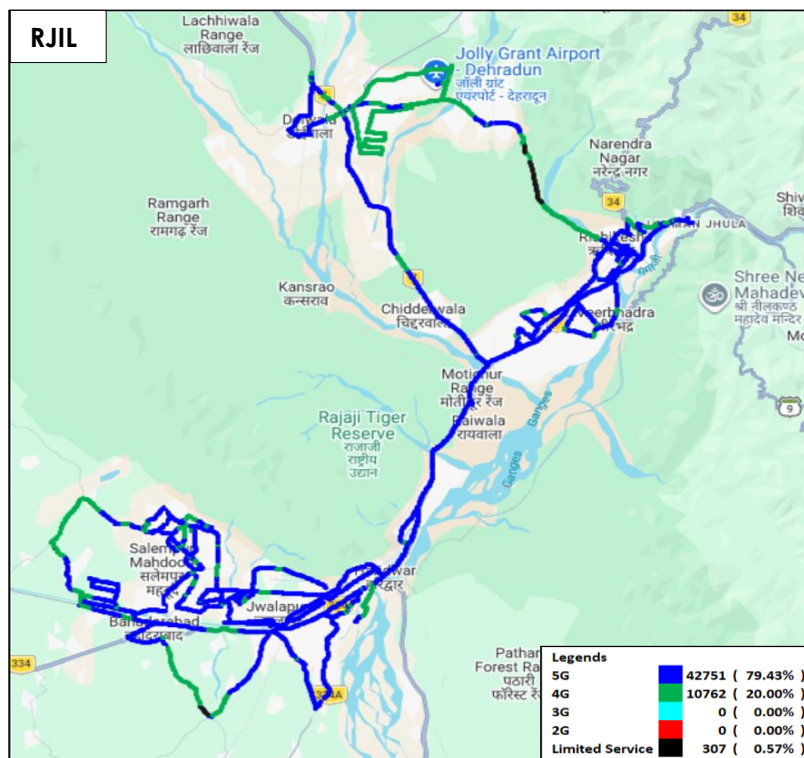


Figure-25: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - RJIL.

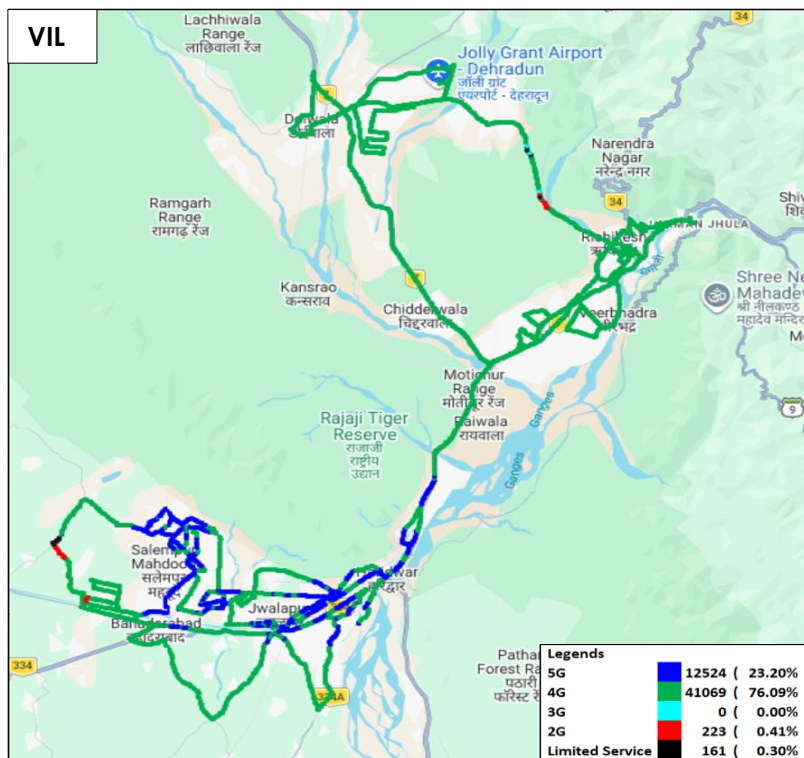


Figure-26: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data – VIL

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-37, 38, 39 & 40 for map view)

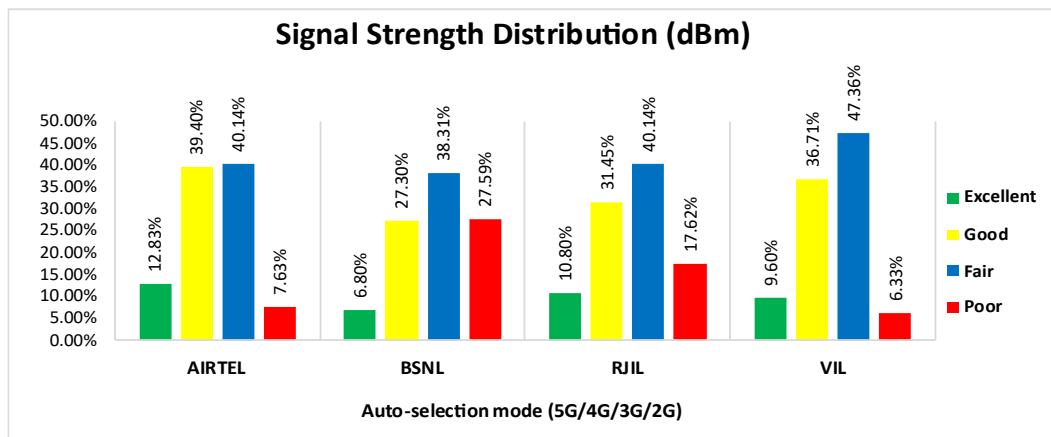


Figure-27: Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

Observations:

- Airtel has 13% of samples falling in the excellent signal strength category.
- BSNL has 7% of samples falling in the excellent signal strength category.
- RJIL has 11% of samples falling in the excellent signal strength category.
- VIL has 10% of samples falling in the excellent signal strength category.

4.3 Hotspots

Hotspot testing has been done from 29th June 2026 to 1st July 2026. Seven locations have been tested in Haridwar and Rishikesh Cities & nearby areas. (Refer Table-1)

4.3.1 Locations

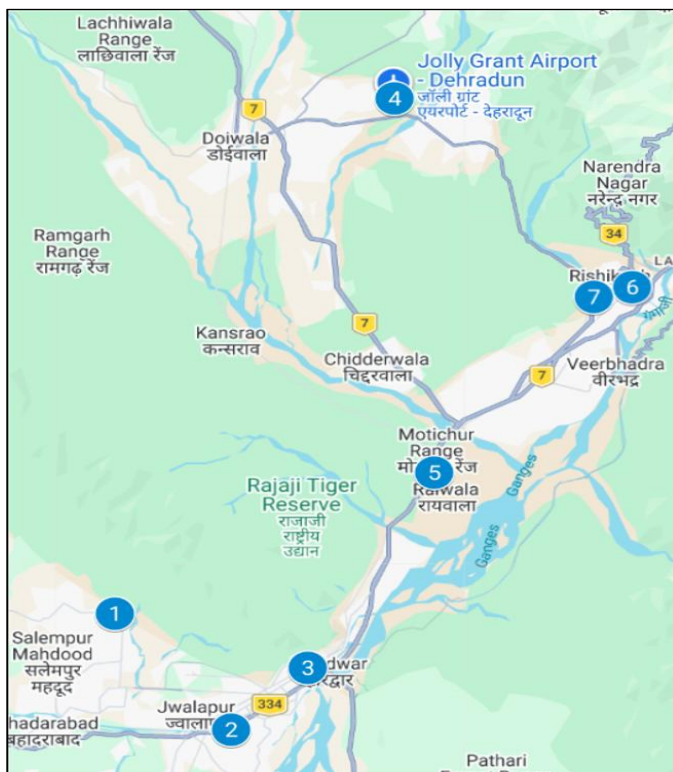


Figure- 28: Hotspot locations

4.3.2 Hotspot covered

1. District Collectorate Office - Haridwar
2. Gurukul Kangri Vishwavidyalaya
3. Haridwar Railway Station
4. Jolly Grant Airport - Dehradun
5. Raiwala Junction Railway Station
6. Rishikesh Bus Stand
7. Yog Nagari Rishikesh Railway Station

4.3.3 Voice performance

Overall Voice Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	70	70	70	70
Call Setup Success Rate %	100.00	94.29	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	13.15	2.79	0.64	1.22

Table-21: Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

District Collectorate Office - Haridwar				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.20	2.20	0.63	0.77

Table-22: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Gurukul Kangri Vishwavidyalaya				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.29	2.35	0.95	0.80

Table-23: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Haridwar Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	5.41	2.07	0.55	0.75

Table-24: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Jolly Grant Airport - Dehradun				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	90.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	21.11	3.21	0.63	2.41

Table-25: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Raiwala Junction Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	21.37	2.16	0.61	2.25

Table-26: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Rishikesh Bus Stand				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	20.94	2.71	0.52	0.78

Table-27: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Yog Nagari Rishikesh Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	70.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	20.73	5.76	0.61	0.79

Table-28: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	232.95	12.26	211.10	56.41
Download Throughput 80th Percentile (Mbit/s)	310.44	17.41	380.70	86.93
Download Throughput 20th Percentile (Mbit/s)	123.60	5.15	34.23	17.66
Download Session Setup Success Rate %	100.00	91.43	100.00	100.00
Upload Throughput Average (Mbits/s)	42.64	6.56	14.85	16.18
Upload Throughput 80th Percentile (Mbit/s)	52.90	10.75	26.17	25.01
Upload Throughput 20th Percentile (Mbit/s)	18.91	2.38	1.63	8.41
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.04	3.43	4.48	3.59
Youtube Initial Buffer Delay (Second)	0.99	3.41	1.49	1.57
Latency (ms) - 50th Percentile	41.35	24.23	34.76	33.72
Jitter (ms)	9.30	11.01	15.73	6.91
Packet Loss Rate%	16.54	23.94	3.91	0.24
Packet Loss Rate- 90th percentile	61.62	100.00	7.38	0.54

Table-29: Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

District Collectorate Office - Haridwar				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	186.07	16.00	301.39	57.41
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	23.83	11.31	10.50	27.61
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.69	1.50	2.06	1.42
Youtube Initial Buffer Delay (Second)	0.63	1.96	1.03	0.93
Latency (ms) - 50th Percentile	47.69	23.71	36.74	33.25
Jitter (ms)	10.36	1.85	3.25	5.59
Packet Loss Rate%	1.70	0.10	0.00	0.20

Table-30: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Gurukul Kangri Vishwavidyalaya				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	300.63	20.52	7.54	19.44
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	29.56	2.56	1.43	1.64
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.83	6.34	12.11	7.41
Youtube Initial Buffer Delay (Second)	0.65	1.66	-	6.16
Latency (ms) - 50th Percentile	33.99	-	50.84	35.21
Jitter (ms)	4.37	-	72.23	8.49
Packet Loss Rate%	0.10	50.30	25.60	0.50

Table-31: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube and Ping tests were failed.				
Haridwar Railway Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	419.88	5.15	346.80	34.51
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	116.27	2.39	25.78	13.11
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.86	2.78	3.28	4.41
Youtube Initial Buffer Delay (Second)	0.59	3.75	0.94	0.88
Latency (ms) – 50 th Percentile	40.32	26.72	34.63	26.22
Jitter (ms)	11.16	3.32	3.88	10.94
Packet Loss Rate%	17.30	1.40	0.00	0.20

Table-32: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Jolly Grant Airport - Dehradun				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	67.65	1.98	65.85	75.54
Download Session Setup Success Rate %	100.00	40.00	100.00	100.00
Upload Throughput Average (Mbits/s)	11.69	1.79	2.70	14.02
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.28	4.31	4.36	4.24
Youtube Initial Buffer Delay (Second)	2.99	7.82	2.67	0.88
Latency (ms) - 50th Percentile	-	-	35.60	36.95
Jitter (ms)	-	-	8.50	5.05
Packet Loss Rate%	86.60	100.00	0.30	0.10

Table-33: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Ping tests were failed.
--

Raiwala Junction Railway Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	276.34	17.15	479.33	107.80
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	49.75	10.79	41.26	8.71
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.75	4.07	3.21	1.37
Youtube Initial Buffer Delay (Second)	0.73	0.93	2.33	1.12
Latency (ms)- 50th Percentile	40.74	22.79	34.81	33.54
Jitter (ms)	4.12	2.93	3.03	4.59
Packet Loss Rate%	0.10	1.10	0.00	0.00

Table-34: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Rishikesh Bus Stand				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	118.57	5.35	171.47	86.07
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	17.76	11.07	20.29	25.89
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.54	2.05	3.08	4.05
Youtube Initial Buffer Delay (Second)	0.66	8.25	0.73	1.06
Latency (ms) - 50th Percentile	41.72	27.13	26.53	37.20
Jitter (ms)	8.23	44.26	2.93	4.30
Packet Loss Rate%	8.80	14.10	0.10	0.20

Table-35: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Yog Nagari Rishikesh Railway Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	261.49	13.49	105.29	14.07
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	49.60	6.00	1.98	22.30
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.27	1.71	8.14	1.51
Youtube Initial Buffer Delay (Second)	0.70	1.25	1.50	0.88
Latency (ms)- 50th Percentile	49.07	21.86	30.86	36.62
Jitter (ms)	17.53	4.20	16.42	9.43
Packet Loss Rate%	1.20	0.60	1.40	0.50

Table-36: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)

Overall Data Performance					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	226.65	-	204.31	41.37
	Upload Throughput Average (Mbits/s)	49.12	-	16.89	13.12
4G	Download Throughput Average (Mbits/s)	27.02	11.33	38.50	29.52
	Upload Throughput Average (Mbits/s)	10.74	10.69	9.02	9.22

Table-37: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

District Collectorate Office - Haridwar					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	128.23	-	282.97	-
	Upload Throughput Average (Mbits/s)	42.35	-	10.56	-
4G	Download Throughput Average (Mbits/s)	24.51	10.01	19.34	59.76
	Upload Throughput Average (Mbits/s)	9.73	24.89	2.92	19.68

Table-38: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Gurukul Kangri Vishwavidyalaya					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	261.09	-	23.57	-
	Upload Throughput Average (Mbits/s)	42.15	-	4.23	-
4G	Download Throughput Average (Mbits/s)	47.53	20.08	13.55	12.79
	Upload Throughput Average (Mbits/s)	11.61	11.74	1.41	2.18

Table-39: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Haridwar Railway Station					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	414.36	-	249.07	41.37
	Upload Throughput Average (Mbits/s)	121.43	-	27.20	13.12
4G	Download Throughput Average (Mbits/s)	43.03	5.41	84.28	22.38
	Upload Throughput Average (Mbits/s)	17.92	6.43	25.12	4.28

Table-40: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Jolly Grant Airport - Dehradun					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	76.08	-
	Upload Throughput Average (Mbits/s)	-	-	3.55	-
4G	Download Throughput Average (Mbits/s)	14.78	4.66	9.40	23.28
	Upload Throughput Average (Mbits/s)	6.93	2.25	1.39	8.83

Table-41: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Raiwala Junction Railway Station					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	273.78	-	520.16	-
	Upload Throughput Average (Mbits/s)	73.76	-	46.74	-
4G	Download Throughput Average (Mbits/s)	47.92	16.89	112.00	63.03
	Upload Throughput Average (Mbits/s)	15.14	10.93	24.32	23.91

Table-42: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Rishikesh Bus Stand					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	101.86	-	184.95	-
	Upload Throughput Average (Mbits/s)	23.11	-	19.19	-
4G	Download Throughput Average (Mbits/s)	7.34	4.15	27.32	15.76
	Upload Throughput Average (Mbits/s)	10.01	6.11	7.08	3.27

Table-43: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Yog Nagari Rishikesh Railway Station					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	154.61	-	109.08	-
	Upload Throughput Average (Mbits/s)	16.16	-	7.20	-
4G	Download Throughput Average (Mbits/s)	4.03	15.45	3.62	9.66
	Upload Throughput Average (Mbits/s)	2.15	10.83	0.87	2.43

Table-44: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

4.4 Walk Test

Walk Test has been conducted on 29th June 2026 & 1st July 2026. Two locations have been tested in Haridwar and Rishikesh. (Refer Table-1)

4.4.1 Walk test locations

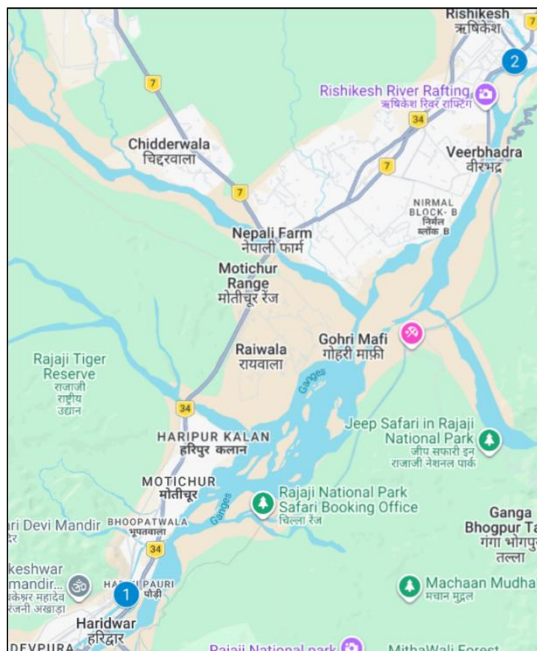


Figure-29: Walk Test locations.

4.4.2 Walk Test Covered

1. Har Ki Pauri Ganga Ghat - Haridwar
2. Triveni Ganga Ghat - Rishikesh

4.4.3 Voice Performance

Har Ki Pauri Ganga Ghat - Haridwar				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	9	11	11	11
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	21.08	1.99	0.53	0.87

Table-45: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Triveni Ganga Ghat - Rishikesh				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	11	11	11	11
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.27	2.86	0.61	0.87

Table-46: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

4.4.4 Data Performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Har Ki Pauri Ganga Ghat - Haridwar				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	11.11	18.44	114.07	55.81
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	2.34	13.61	14.79	29.55
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	185.75	25.30	32.53	37.40

Table-47: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Triveni Ganga Ghat - Rishikesh				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	53.97	13.00	158.99	68.31
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	7.47	8.31	30.08	19.27
Upload Session Setup Success Rate %	100.00	88.89	100.00	100.00
Latency (ms) - 50th Percentile	46.60	24.00	20.29	35.06

Table-48: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

5. Voice & Data Key findings

5.1 Overall Voice

1. Call Setup Success Rate:

- a) Airtel, BSNL and VIL have 97.37%, 96.28% and 99.30% call setup success rate respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL have 98.30%, 90.65%, 99.45% and 99.82% call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- c) Airtel had a 100.00% call setup success when calling RJIL whereas call blocking was observed when calling BSNL & VIL. (refer table-9)
- d) Call blocking was observed in BSNL when calling Airtel, RJIL & VIL for inter-operator calls. (refer Table-9)
- e) RJIL have 100.00% call setup success rate while calling on peer service provider's network for inter-operator calls. (refer table-9)
- f) VIL had a 100.00% call setup success when calling Airtel and RJIL whereas call blocking was observed when calling BSNL. (refer table-9)

2. Call Setup Time:

- a) Airtel, BSNL and VIL call setup time is 8.91, 2.69 and 4.52 seconds respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL & VIL call setup time is 8.82, 2.69, 0.72 & 1.16 seconds respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

3. Call Silence/Mute Rate: In packet switched network (4G/5G) RJIL, VIL, BSNL and Airtel have 2.07%, 1.77%, 1.72% and 0.97% silence call rate respectively. Further BSNL has higher RTP packet loss rate in downlink (3.72%) compared to RJIL (2.40%), VIL (0.86%) and Airtel (0.67%). In uplink the RTP packet loss rate is higher for BSNL (2.46%) compared to RJIL (1.49%), Airtel (0.69%) and VIL (0.55%). (refer table-6)

4. Drop Call Rate:

- a) Airtel, BSNL and VIL drop call rate is 0.25%, 4.32% and 0.47% respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL drop call rate 1.92%, 2.53%, 0.37% and 0.00% respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

5.2 Overall Data

1. Data download and upload performance (Overall i.e. LSA):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 133.12 Mbps, 8.55 Mbps, 203.18 Mbps and 58.46 Mbps respectively. (refer table-11)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 25.21 Mbps, 4.50 Mbps, 22.55 Mbps and 15.20 Mbps respectively. (refer table-11)

2. Data download and upload performance (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 232.95 Mbps, 12.26 Mbps, 211.10 Mbps and 56.41 Mbps respectively. (refer table-29)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 42.64 Mbps, 6.56 Mbps, 14.85 Mbps and 16.18 Mbps respectively. (refer table-29)

3. Data session setup success rate (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL have 100.00%, 91.43%, 100.00% and 100.00% download session setup success rate respectively. (refer table-29)
- b) All operators have 100.00% upload session setup success rate. (refer table-29)

5.3 Operator wise Key Findings

1. Airtel:

Voice

- 97.37% call setup success rate and 0.25% drop call rate have been observed in 3G/2G network mode for LSA/city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-3 & 13)
- 98.30% call setup success rate and 1.92% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 97.95% call setup success rate and 2.33% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at both walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-45 & 46)

Data

- Airtel has 133.12 Mbps average download speed & 25.21 Mbps average upload speed for LSA. (refer table-11)
- Airtel has 128.99 Mbps average download speed & 24.54 Mbps average upload speed across measured routes for city drive. (refer table-19)
- Jolly Grant Airport - Dehradun has less download speed (less than 100 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-33)
- Jolly Grant Airport - Dehradun and Rishikesh Bus Stand have less upload speed (less than 20 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-33 & 35)
- Both walk test locations have less download speed (less than 100 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-47 & 48)
- Both walk test locations have less upload speed (less than 20 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-47 & 48)

2. BSNL:

Voice

- 96.28% call setup success rate and 4.32% drop call rate have been observed in 3G/2G network mode for LSA/city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-3 & 13)

- 90.65% call setup success rate and 2.53% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 89.68% call setup success rate and 3.05% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 94.29% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Har Ki Pauri Ganga Ghat - Haridwar & Vijay Chowk Market Area walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 57 & 59)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at both walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-45 & 46)

Data

- BSNL has 8.55 Mbps average download speed & 4.50 Mbps average upload speed for LSA. (refer table-11)
- BSNL has 7.96 Mbps average download speed & 4.11 Mbps average upload speed across measured routes for city drive. (refer table-19)
- Haridwar Railway Station, Jolly Grant Airport - Dehradun & Rishikesh Bus Stand have less download speed (less than 10 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-32, 33 & 35)
- Jolly Grant Airport - Dehradun has less upload speed (less than 2 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-33)

3. RJIL:

Voice

- 99.45% call setup success rate and 0.37% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 99.34% call setup success rate and 0.44% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-45 & 46)

Data

- RJIL has 203.18 Mbps average download speed & 22.55 Mbps average upload speed for LSA. (refer table-11)

- RJIL has 205.57 Mbps average download speed & 23.21 Mbps average upload speed across measured routes for city drive. (refer table-19)
- Gurukul Kangri Vishwavidyalaya & Jolly Grant Airport - Dehradun have less download speed (less than 100 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-31 & 33)
- District Collectorate Office - Haridwar, Gurukul Kangri Vishwavidyalaya, Jolly Grant Airport - Dehradun and Yog Nagari Rishikesh Railway Station have less upload speed (less than 20 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-30, 31, 33 & 36)
- Har Ki Pauri Ganga Ghat - Haridwar has less upload speed (less than 20 Mbps) out of total 2 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-47)

4. VIL:

Voice

- 99.30% call setup success rate and 0.47% drop call rate have been observed in 3G/2G network mode for LSA/city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3 & 13)
- 99.82% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 99.78% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at both walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-45 & 46)

Data

- VIL has 58.46 Mbps average download speed & 15.20 Mbps average upload speed for LSA. (refer table-11)
- VIL has 58.46 Mbps average download speed & 14.79 Mbps average upload speed across measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 100 Mbps) except Raiwala Junction Railway Station for auto-selection mode (5G/4G/3G/2G). (refer table-30, 31, 32, 33, 35 & 36)
- Gurukul Kangri Vishwavidyalaya, Haridwar Railway Station, Jolly Grant Airport - Dehradun and Raiwala Junction Railway Station have less upload speed (less than 20 Mbps) out of total 7 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-31, 32, 33 & 34)
- Both walk test locations have less download speed (less than 100 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-47 & 48)
- Triveni Ganga Ghat - Rishikesh has less upload speed (less than 20 Mbps) out of total 2 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-48)

6. Annexure

6.1 Route wise coverage map

6.1.1 City

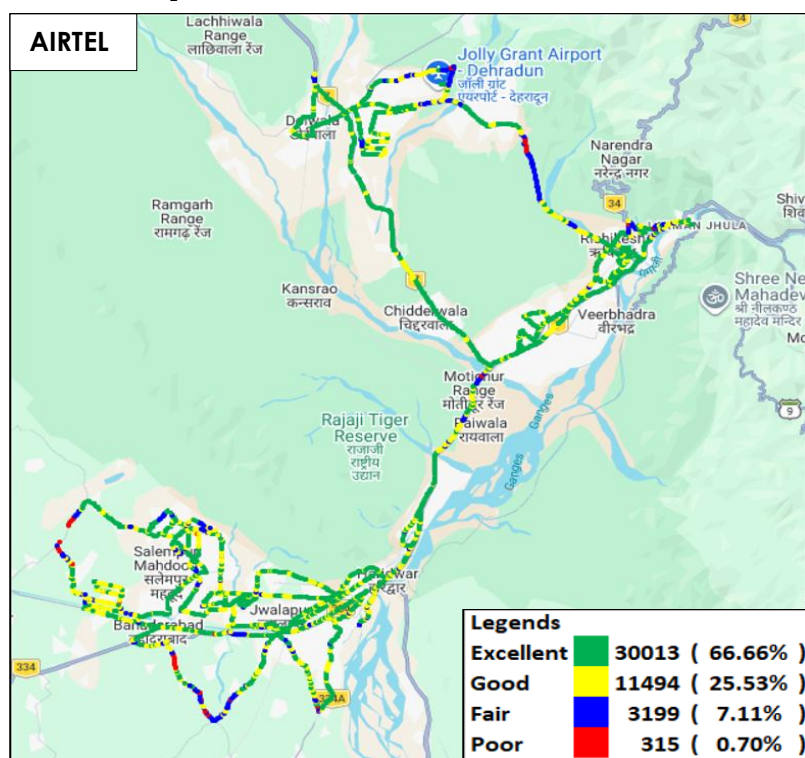


Figure-30: Signal strength 3G/2G network mode voice - AIRTEL.

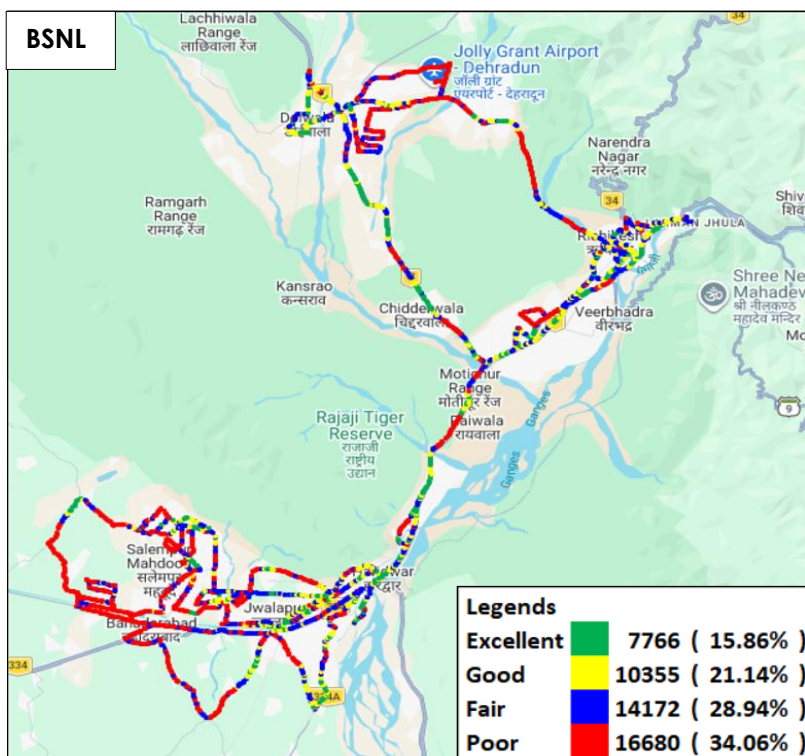


Figure-31: Signal strength 3G/2G network mode voice - BSNL.

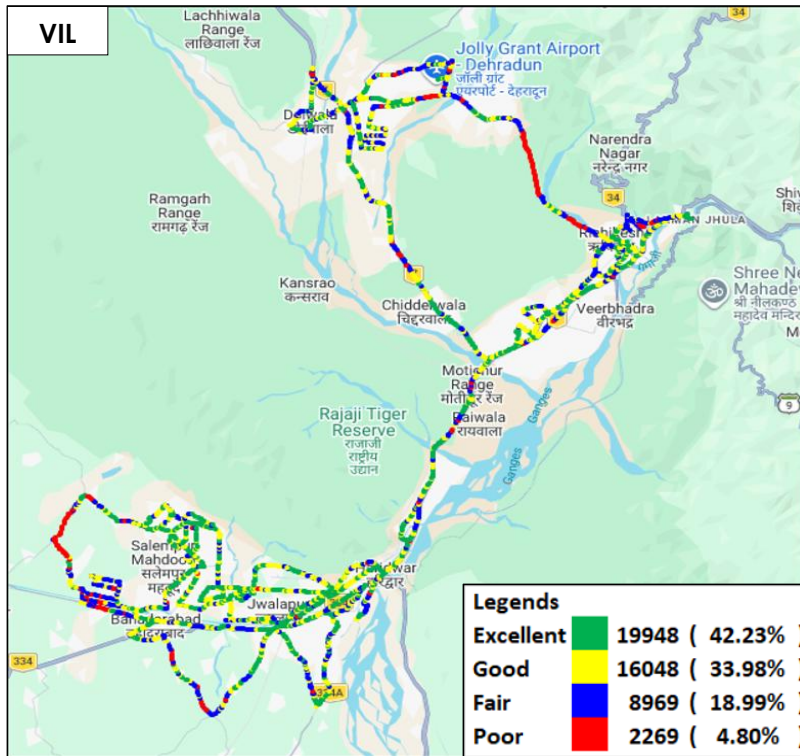


Figure-32: Signal strength 3G/2G network mode voice - VIL.

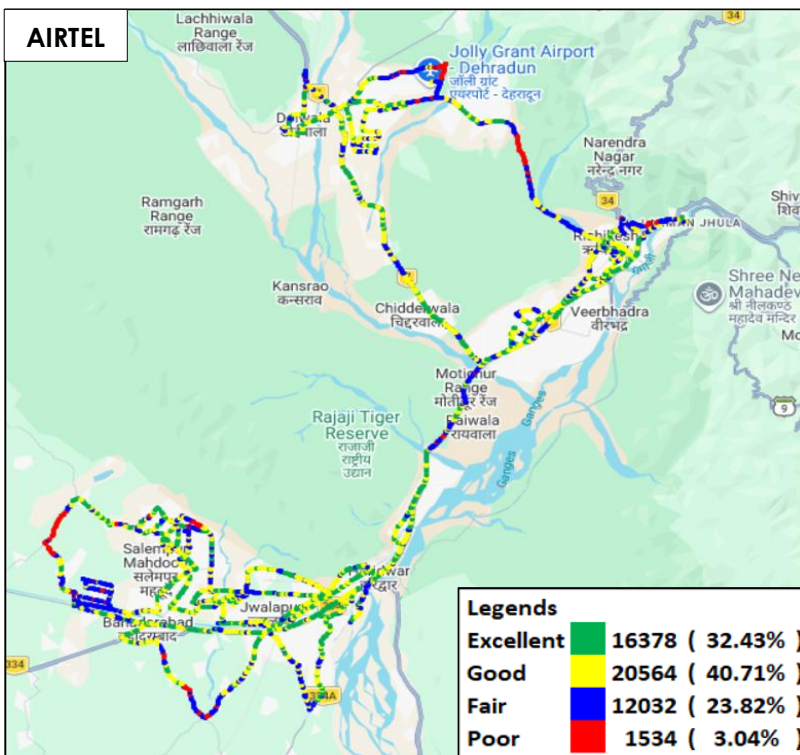


Figure-33: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

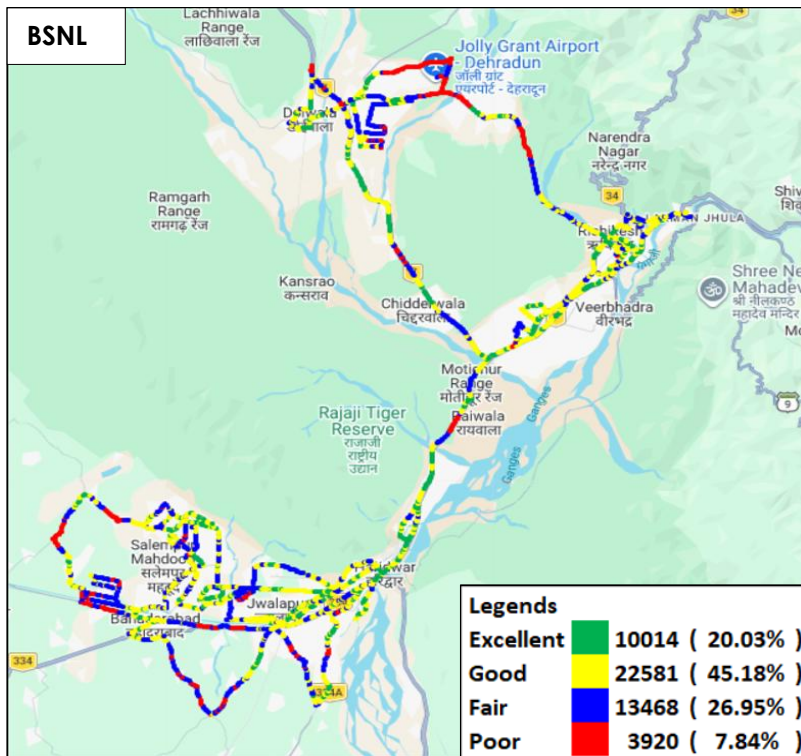


Figure-34: Signal strength auto-selection mode (5G/4G/3G/2G) voice - BSNL.

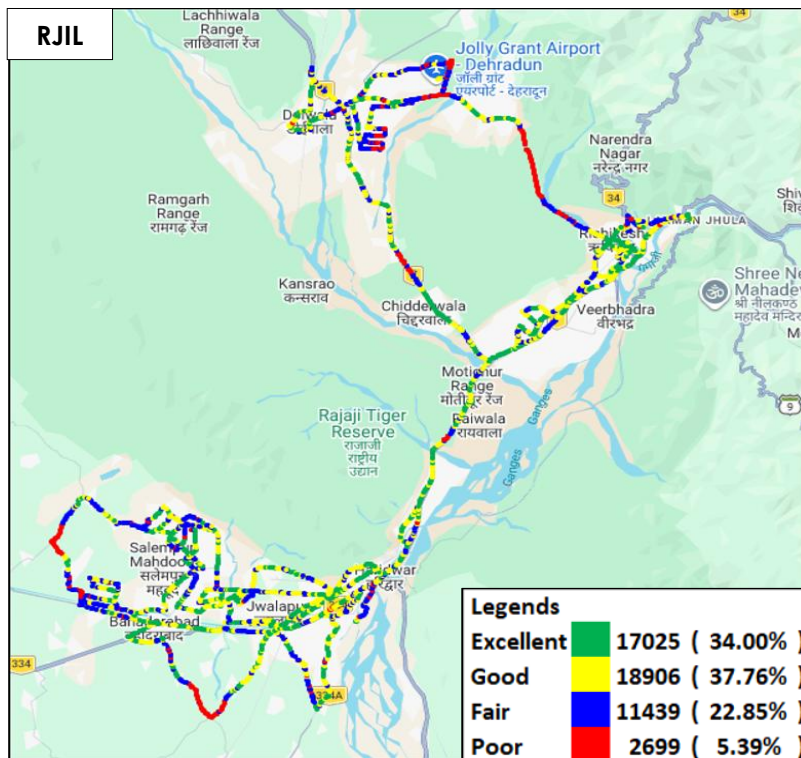


Figure-35: Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

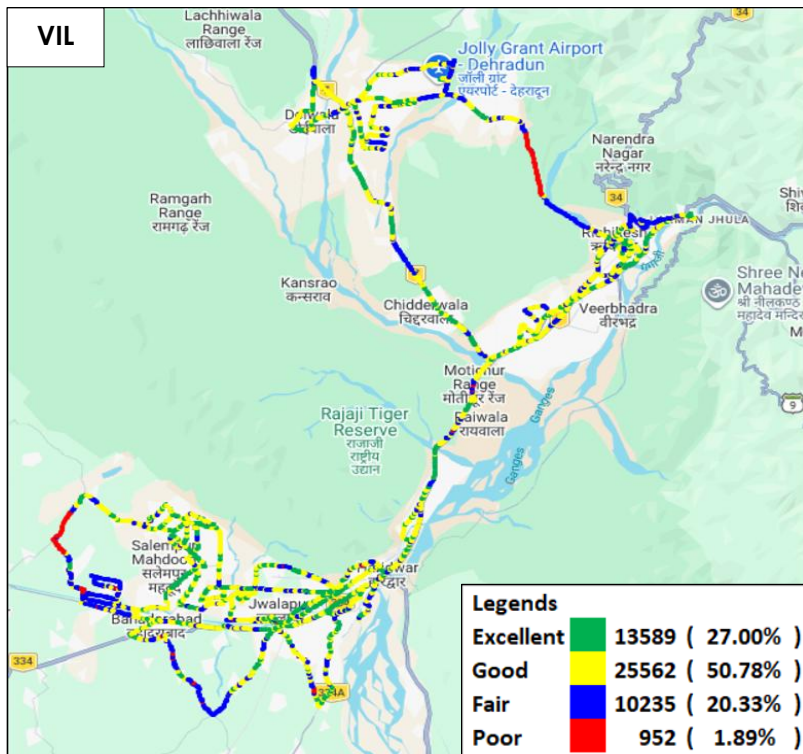


Figure-36: Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.

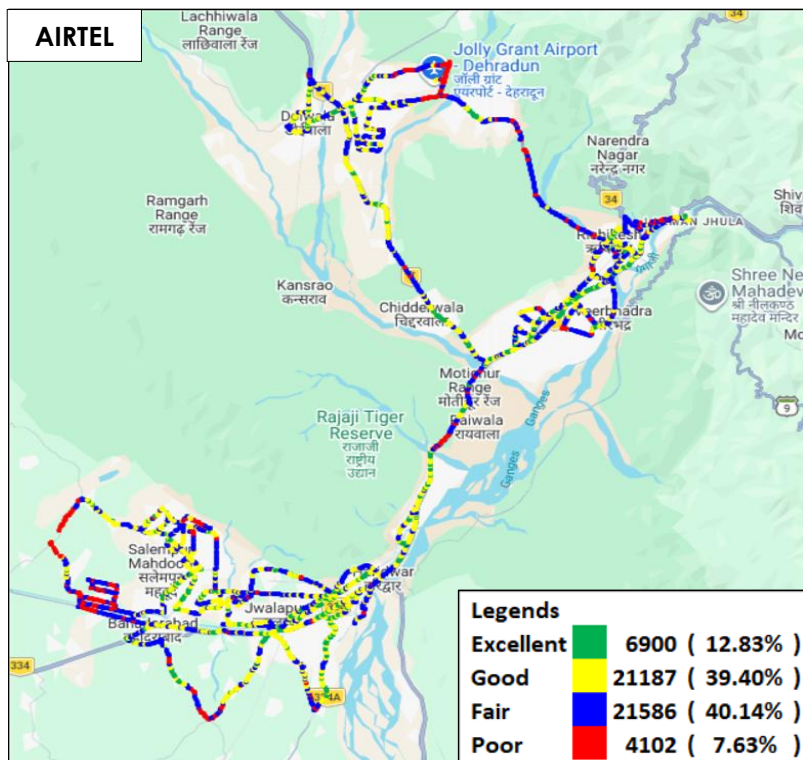


Figure-37: Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

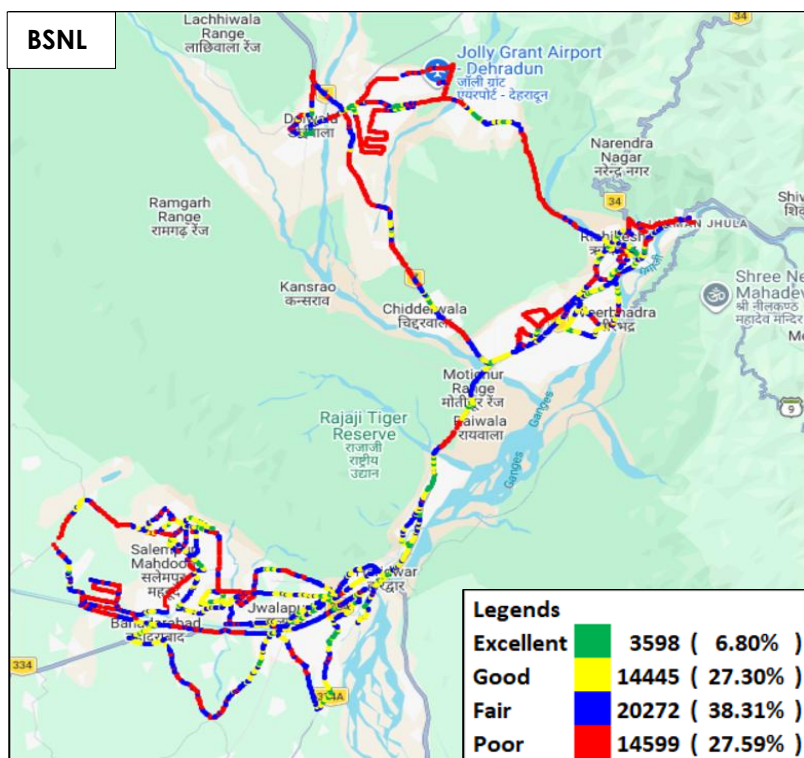


Figure-38: Signal strength auto-selection mode (5G/4G/3G/2G) data - BSNL.

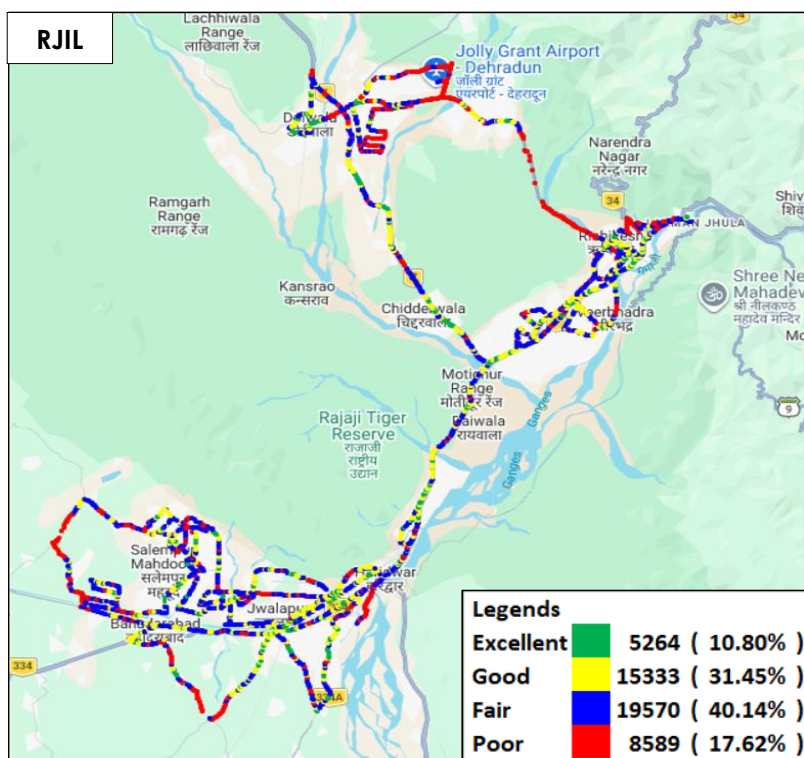


Figure-39: Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

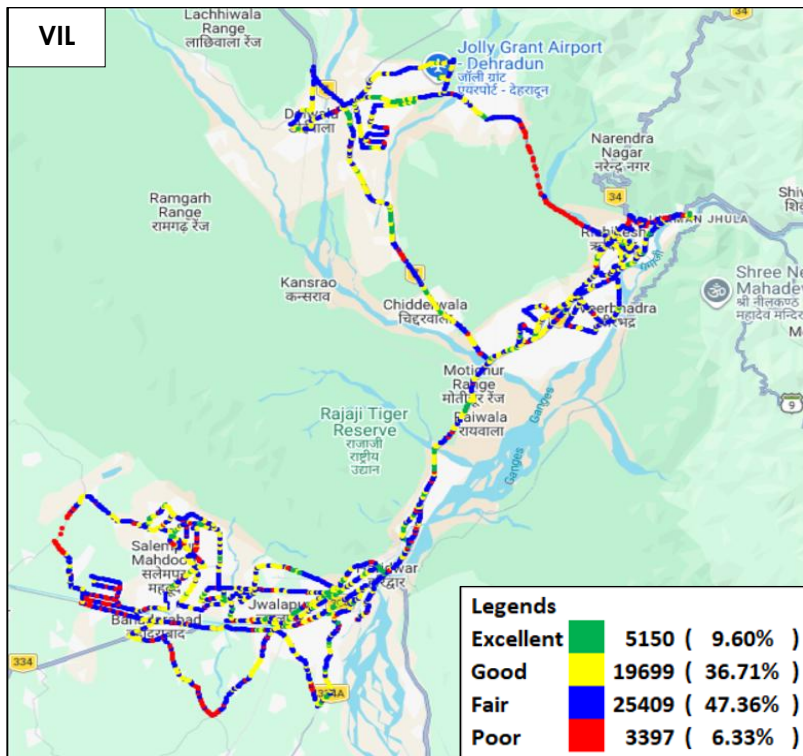


Figure-40: Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions June be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

7.1 Appendix-I

7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	• 3G/2G auto mode- switch Call • 5G/4G/3G/2G auto mode- switch Call • 5G/4G MOS Call	30 Sec
Call Duration		90 seconds
Wait/ Guard Time		15 Sec

Table-49: Voice test detail

Note-

- There is 15 sec wait time after locking and before starting first call in 3G/2G call.
- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.
- Speech quality (MOS) has been measured only in city drive by making Mobile to Mobile call.

Data Test		
Test Type	Technology	Detail
FTP/HTTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
FTP/HTTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)
Web Browsing		3 popular websites (www.google.co.in , www.ircctc.co.in , www.sbi.bank.in) 20 sec timeout (only at Hotspot)

Latency & Jitter (TWAMP-UDP)		25 count- Dynamic 500 count- Hotspot Payload- 42 bytes in all drive
Packet Loss Rate (TWAMP-UDP & TCP)		500 counts (TWAMP-UDP) 500 counts (TCP) at each hotspot Payload- 42 bytes in all drive

Table-50: Data test detail

Note-

- 5 Data iteration to be done at each hotspot location.
- Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance.
- TWAMP-UDP & TCP test to be performed only once at hotspot location.
- Youtube & Web browsing test to be performed at static location only.
- All values are taken up to two decimal places with round off.
- Airtel server was used for FTP Download, FTP Upload, TCP and TWAMP testing for Airtel.
- Delhi-based TRAI server was used for HTTP Download, Upload, TCP and TWAMP testing for BSNL.
- RJIL server was used for FTP Download, FTP Upload, TCP and TWAMP testing for RJIL.
- VIL server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing for VIL.

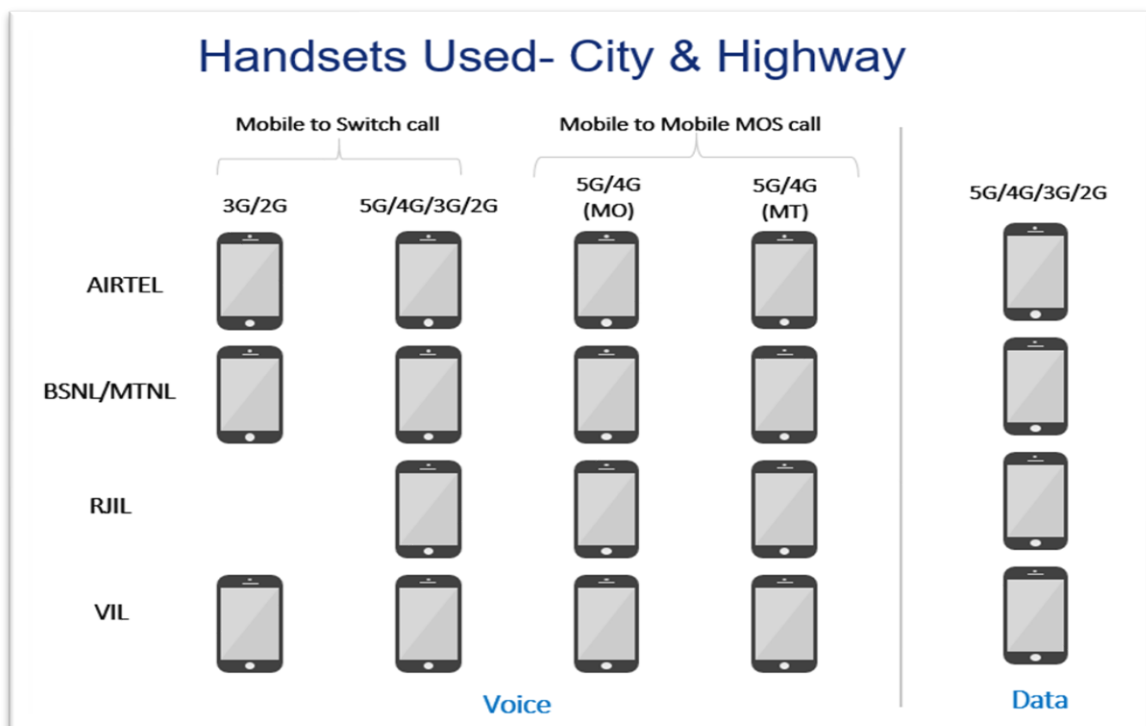


Figure-41: Number of handsets used in city & highway drive

MO: Mobile originating

MT: Mobile terminating

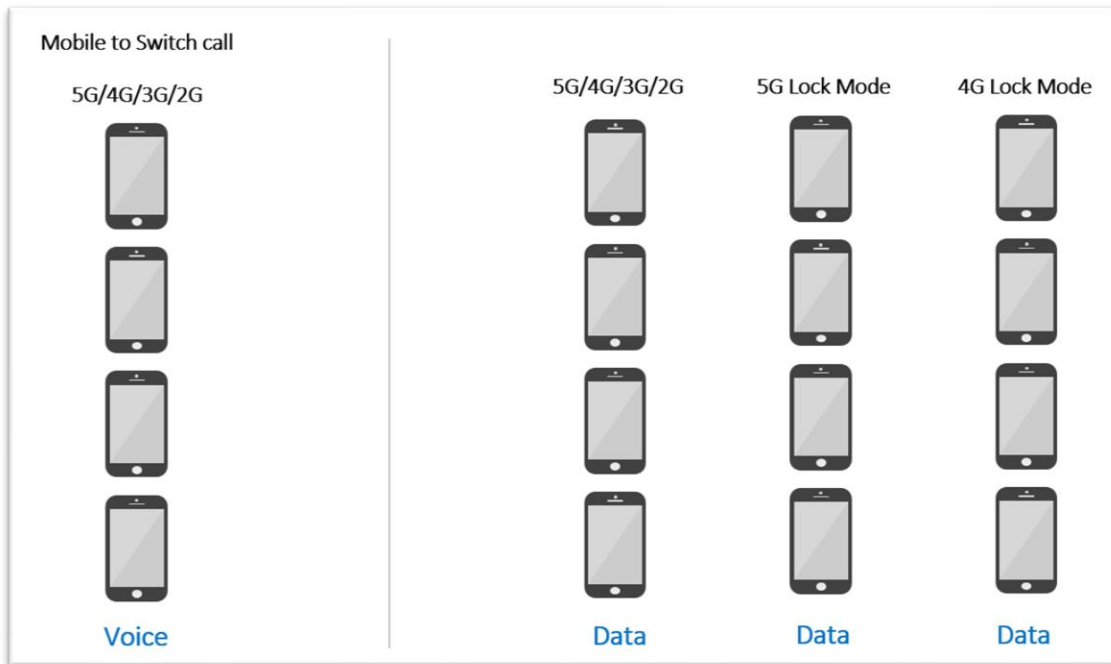


Figure-42: Number of handsets used in railway/metro/walktest/hotspot/coastal area

Note- 5G & 4G Lock mode testing has been performed at hotspot locations only.

7.1.2 Drive test Methodology

(a) Dynamic voice testing (on the move)

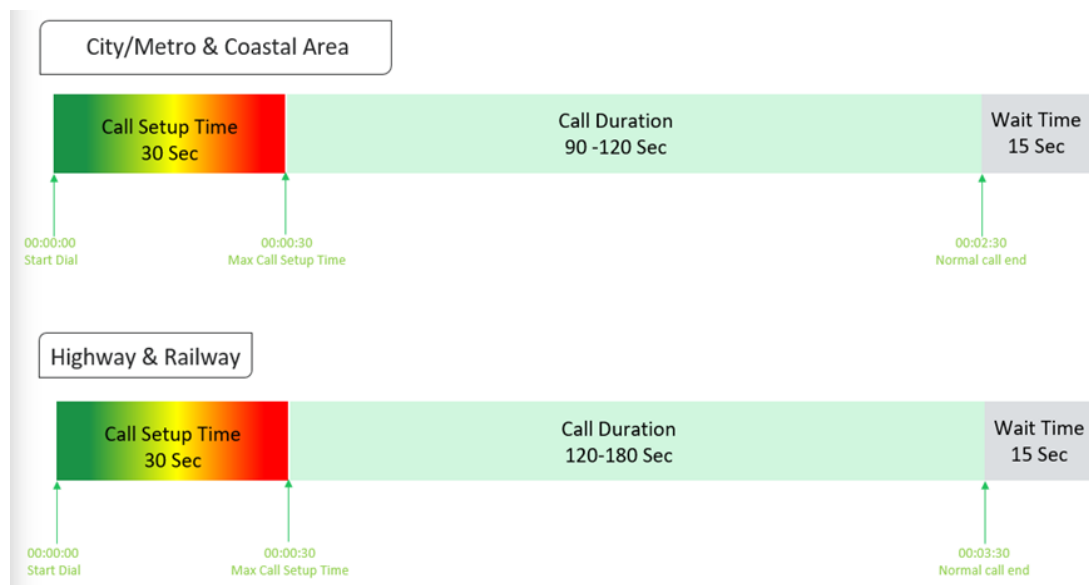


Figure-43: Voice test script for city/railway/metro/highway & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.
- Speech quality (MOS) will be measured only City & Highway drive by making Mobile to Mobile calls.

(b) Hotspot voice testing



Figure-44: Voice test script for walktest/hotspot

- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.

(c) Dynamic Data (internet) test

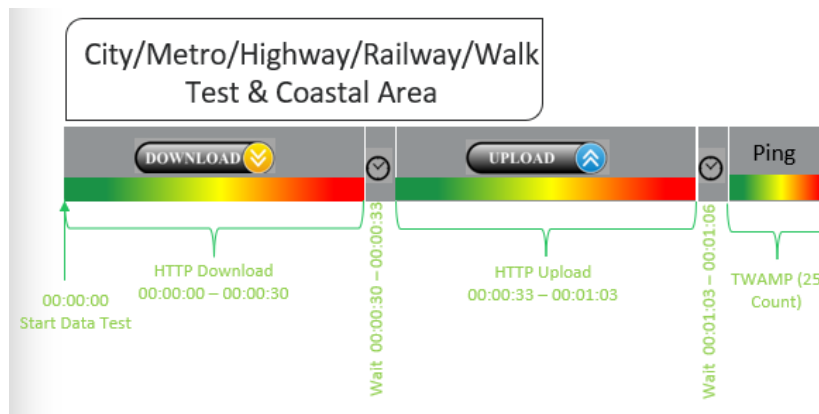


Figure-45: Data test script used in city/metro/railway/highway/walk test & coastal area

(d) Static Data(internet) testing

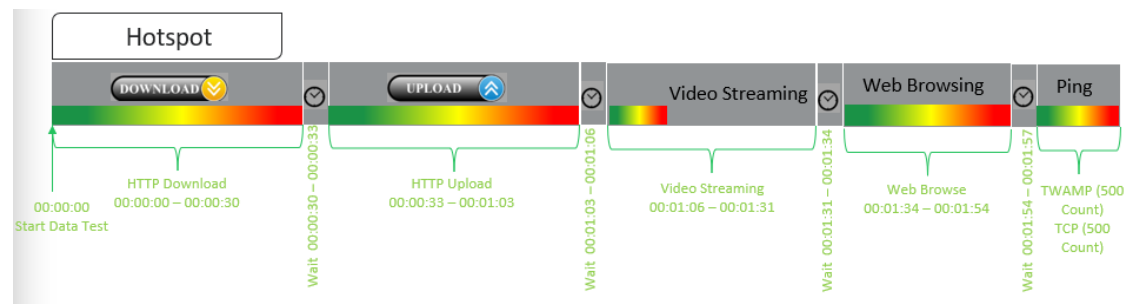


Figure-46: Data test script used at hotspot

- 5 Data iteration done at each hotspot location.
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- One ping iteration (with 500 Count of each- TWAMP & TCP) done at hotspot location.

7.2 Appendix-II

7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
Call Setup Success Rate	(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup: (a) Call attempt is made (b) The signaling channel is allocated (c) The call is routed to the outwards path of the terminating network (d) An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement. CSSR = (Total Call Established/ Total Call Attempt) *100 As per QoS Regulation 2024 benchmark value is >=98%
Drop Call Rate	Call drop represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network Drop Call Rate = (Total Call Drop/Total Call Established) *100 As per QoS Regulation 2024 benchmark value is <=2%
Call Setup Time	Time taken from call initiate to call alerting/ringing. Call Setup Time = T2- T1 T2- Ringing (VoLTE/VoNR) & Alerting (for WCDMA & GSM), T1- Invite (VoLTE/VoNR) & CM Service Request (for WCDMA & GSM)
Voice Quality (MOS)	Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as: Excellent: MOS ≥ 4 and < 5 Good : MOS ≥ 3 and < 4 Fair : MOS ≥ 2 and < 3 Poor : MOS ≥ 1 and < 2
Handover Success Rate	Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100 Handover type which are considered- 2G Inter & Intra cell, 3G Soft & IRAT, 4G Inter & Intra frequency & SRVCC, 5G Inter & Intra frequency & 5G to 4G handovers.
Silence Call	A call which has ≥ 4 sec continuous RTP gap is considered as a Silence Call. Silence call rate = (count of silence call / Total calls established) *100 If a call observes multiple silence count ≥ 4 sec in a particular established call it has been taken as one silent event.

Jitter	The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If S_i is the RTP timestamp from packet i, and R_i is the time of arrival in RTP timestamps units for packet i, then for two packets i and j the inter-arrival jitter D can be expressed as: $D(i,j) = (R_j - R_i) - (S_j - S_i)$ The interarrival jitter is calculated continuously as each data packet i is received from source $SSRC_n$, using this difference D for that packet and the previous packet $i-1$ in order of arrival (not necessarily in sequence), according to the formula $J(i) = J(i-1) + (D(i-1,i) - J(i-1))/16$ or 8																																		
Downlink Packet Drop Rate	Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE)																																		
Uplink Packet Drop Rate	Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).																																		
Signal Strength	Signal strength is the signal power level received by the wireless user. <table><tr><th rowspan="2">Parameter Name</th><th rowspan="2">Technology</th><th colspan="4">Signal Strength (dBm)</th></tr><tr><th>Excellent</th><th>Good</th><th>Fair</th><th>Poor</th></tr><tr><td>Rx Level</td><td>GSM</td><td>0 to ≥ -65</td><td><-65 to ≥ -75</td><td><-75 to ≥ -85</td><td><-85 to min</td></tr><tr><td>RSCP</td><td>WCDMA</td><td>0 to ≥ -70</td><td><-70 to ≥ -80</td><td><-80 to ≥ -90</td><td><-90 to min</td></tr><tr><td>RSRP</td><td>LTE</td><td>0 to ≥ -80</td><td><-80 to ≥ -95</td><td><-95 to ≥ -110</td><td><-110 to min</td></tr><tr><td>SS_RSRP</td><td>NR</td><td>0 to ≥ -80</td><td><-80 to ≥ -95</td><td><-95 to ≥ -110</td><td><-110 to min</td></tr></table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to ≥ -65	<-65 to ≥ -75	<-75 to ≥ -85	<-85 to min	RSCP	WCDMA	0 to ≥ -70	<-70 to ≥ -80	<-80 to ≥ -90	<-90 to min	RSRP	LTE	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min	SS_RSRP	NR	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to ≥ -65	<-65 to ≥ -75	<-75 to ≥ -85	<-85 to min																														
RSCP	WCDMA	0 to ≥ -70	<-70 to ≥ -80	<-80 to ≥ -90	<-90 to min																														
RSRP	LTE	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min																														
SS_RSRP	NR	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min																														

Table-51: Network performance parameter and definition voice

7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
Download Speed (Mbps)	The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device. Download Speed = Total bytes transferred during download / Total time for transfer 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for download throughput in dynamic drive and Hotspot combine data
Upload Speed (Mbps)	The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server. Upload Speed = Total bytes transferred during upload / Total time for transfer. 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for upload throughput in dynamic drive and Hotspot combine data.
Download Session Setup Success Rate	(total download session established (successfully connected to server)/ total download session attempt) *100. This KPI has been calculated for Hotspot only.

Upload Session Setup Success Rate	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
Web Page Download Time	Web browsing test is used to measure performance in terms of opening a web/HTTP page. Time taken to open the web page successfully is considered as web browsing delay/web page download time.
Video Streaming Delay	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
Latency (TWAMP-UDP)	Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again. The Latency is measured in milliseconds (ms). To calculate the one-way latency, we just do half of the round-trip time. 50th percentile of one-way latency has been reported.
Jitter (TWAMP-UDP)	Measure of variation in time in arrival of packets from a source to destination The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL $IPDV(i) = D(i) - D(i-1)$ then Stdvs of IPDV is considered as jitter.
Packet Loss Rate (TWAMP-UDP & TCP)	Number of packets lost out of total packet transferred during test. Packet loss rate = (Total packet lost / Total packet sent) *100 * Packet delay (using TWAMP-UDP & TCP) >90 ms considered as packet loss and included in packet loss rate. * Packet loss rate is calculated based on TWAMP-UDP & TCP. *90th percentile for Packet loss rate has been reported in overall Hotspot performance summary.

Table-52: Network performance parameter and definition Data

Disclaimer: The observations presented above and, in the reports, represent the performance of the service providers on the area/route under test on the day/time of conducting the drive test and no inference whatsoever June be drawn regarding the quality of the telecom service by the service providers in the whole city/state/licensed service area.