



**TELECOM REGULATORY AUTHORITY OF INDIA**

*Independent Drive Test Report*

*UP West LSA*

*June 2025*

## Contents

1. Introduction .....	3
2. Executive Summary (LSA) .....	3
2.1 Drive test details .....	3
2.2 Drive test routes .....	4
2.3 Summary of areas covered .....	4
2.4 Telecom service providers detected frequency bands .....	5
2.5 Performance against key QoS parameters .....	5
3. QoS performance analysis- LSA level .....	7
3.1 Overview .....	7
3.2 Voice performance .....	7
3.3 Data performance .....	10
4. Detailed QoS performance analysis .....	12
4.1 Overview .....	12
4.2 City .....	12
4.2.1 Drive test route .....	12
4.2.2 Areas covered .....	12
4.2.3 Voice performance .....	12
4.2.4 Data performance .....	21
4.3 Hotspots .....	22
4.3.1 Locations .....	22
4.3.2 Hotspot covered .....	22
4.3.3 Voice performance .....	23
4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G) .....	25
4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed) .....	28
4.4 Highway .....	31
4.4.1 Drive test route .....	31
4.4.2 Routes Covered .....	31
4.4.3 Voice performance .....	31
4.4.4 Data performance .....	40
5. Voice & Data Key findings .....	41
5.1 Overall Voice .....	41
5.2 Overall Data .....	41
5.3 Operator wise Key Findings .....	42
6. Annexure .....	46

6.1 Route wise coverage map .....	46
6.1.1 City .....	46
6.1.2 Highway .....	49
7. Appendix .....	53
7.1 Appendix-I .....	53
7.1.1 Drive test setup .....	53
7.1.2 Drive test Methodology .....	55
7.2 Appendix-II .....	57
7.2.1 Network Performance Parameters for Voice calls .....	57
7.2.2 Network Performance Parameters Data tests .....	58

## 1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interest of the consumers of telecommunications service.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

## 2. Executive Summary (LSA)

### 2.1 Drive test details

This report covers the findings of the IDT undertaken in UP West License Service Area (LSA) during the month of June 2025 under the supervision of TRAI Regional Office (RO), Delhi. Details of route/area covered during the IDT is as given below:

S. No.	Drive test route	Type of route	Distance covered (KMs)/ Locations	From date	To date
1	Meerut	City	216.2	2-June-2025	3-June-2025
2	Meerut	Hotspot	9 Locations	4-June-2025	4-June-2025
3	Meerut	Inter Operator Calling	2 Locations	4-June-2025	4-June-2025
4	Delhi to Meerut	Highway	64.9	2-June-2025	2-June-2025

**Table-1:** Drive test summary

## 2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, hotspots, inter-operator and highway call as per the legends shown on the map.

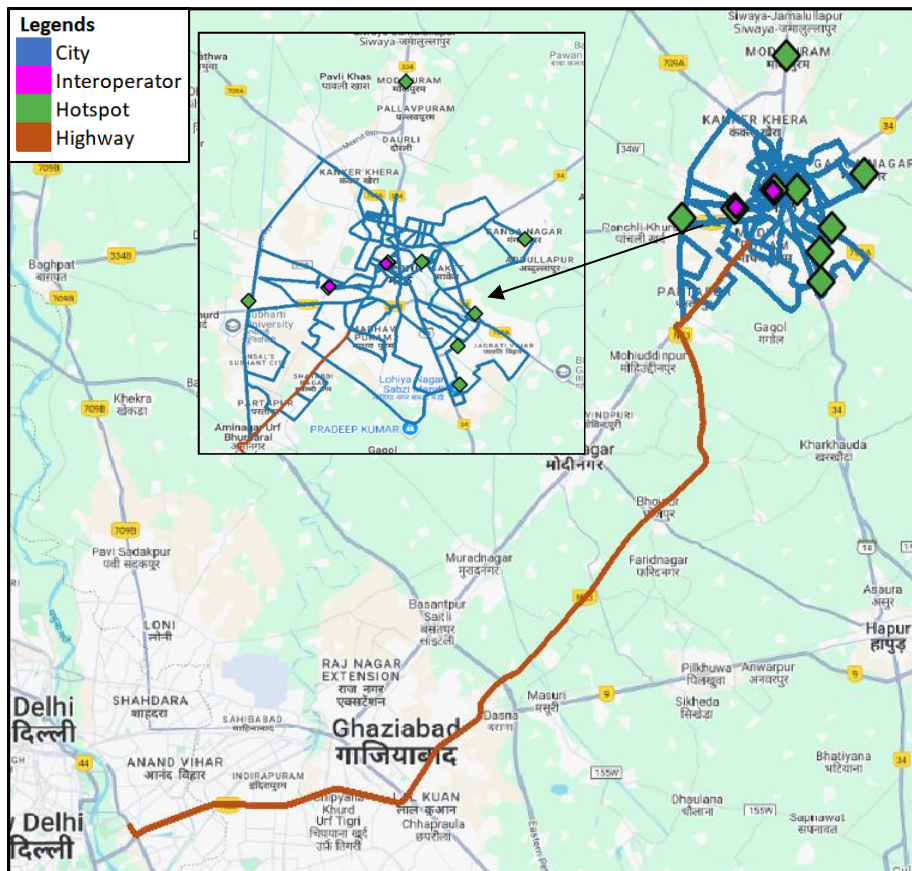


Figure-1: Drive test routes

## 2.3 Summary of areas covered

**a) City-** Ganga Nagar, Jai Bheem Nagar, Lohia Nagar, Madhav Puram, Partapur, Malyana, Dabka, Kanker Khera, Meerut Cantt & Saket etc.

### **b) Hotspot**

1. Chaudhary Charan Singh University
2. District and Sessions Court, Meerut
3. IIMT University
4. Meerut Institute of Engineering and Technology
5. Meerut Railway Station
6. Meerut Roadways Bus Stand
7. PVS Mall
8. SDS Global Super Speciality Hospital
9. St. Francis World School

## 2.4 Telecom service providers detected frequency bands


Technologies covered during the IDT and frequency bands in use are summarised in below table.

S.No.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	900,1800
2	Bharti Airtel Ltd.	4G	850,900,1800,2100,2300
3	Bharti Airtel Ltd.	5G	3500
4	BSNL	2G	900
5	BSNL	3G	2100
6	BSNL	4G	700,2100,2500
7	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
8	Reliance JIO Infocomm Ltd.	5G	700,3500
9	Vodafone Idea Ltd.	2G	900,1800
10	Vodafone Idea Ltd.	4G	900,1800,2100,2500

**Table 2:** Telecom service provider (TSP) covered in IDT.

## 2.5 Performance against key QoS parameters

CSSR: Call Setup Success Rate (in %), CST: Call Setup Time (in milli seconds), DCR: Drop Call Rate (in %) & MOS: Mean Opinion Score.

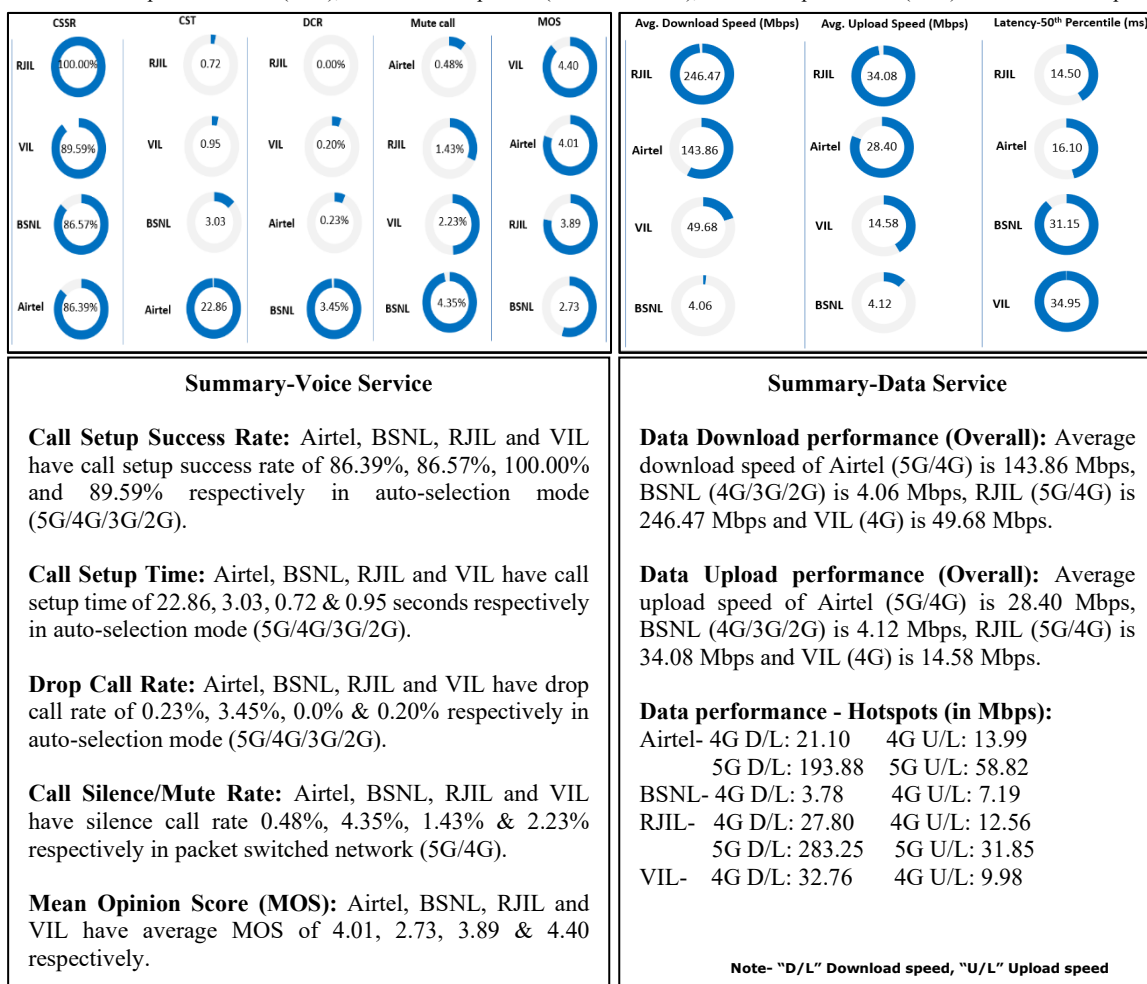

## QoS Performance Analysis- UP West LSA

### 3. QoS performance analysis- LSA level

#### 3.1 Overview


This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the LSA during the month of June-2025 covering city drive, hotspots and highway. (refer table 1)

#### 3.2 Voice performance

(a) **Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	643	548	417
Call Setup Success Rate %	35.61 <sup>1</sup>	92.34	98.56
Drop Call Rate %	1.75	2.57	0.73
Call Setup Time-Average (Second)	12.79	3.63	4.79
Handover Success Rate %	97.66	99.37	98.71

**Table-3:** Summary of voice call performance in 3G/2G network mode only.

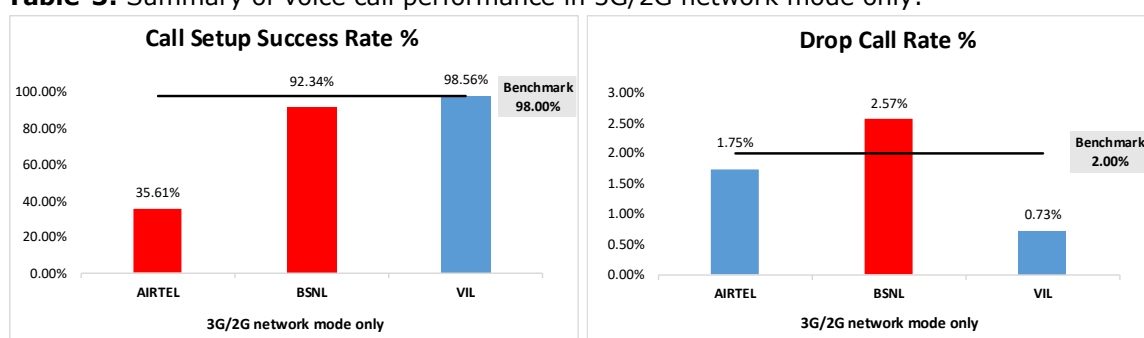

**Figure-2:** Call setup success rate and drop call rate performance.

Number of unique cell id's covered in Voice test- Technology wise			
Technology	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
3G	NA	141	NA
2G	626	93	496

**Table-4:** Technology wise number of network cell id's latched during drive test.

**Note-**

- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.


<sup>1</sup>RO Delhi has conveyed that Airtel has provided its comment that the Call Setup Time (CST) is on the higher side, while the Call Setup Success Rate (CSSR) remains relatively low due to the Pre-Call Announcement (PCA) mandated by the DoT for customer awareness.



**(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)**

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	507	670	534	567
Call Setup Success Rate %	86.39 <sup>2</sup>	86.57	100.00	89.59
Drop Call Rate %	0.23	3.45	0.00	0.20
Call Setup Time-Average (Second)	22.86	3.03	0.72	0.95
Handover Success Rate %	99.90	99.92	99.90	99.90

**Table-5:** Summary of voice call performance in network auto-selection mode.

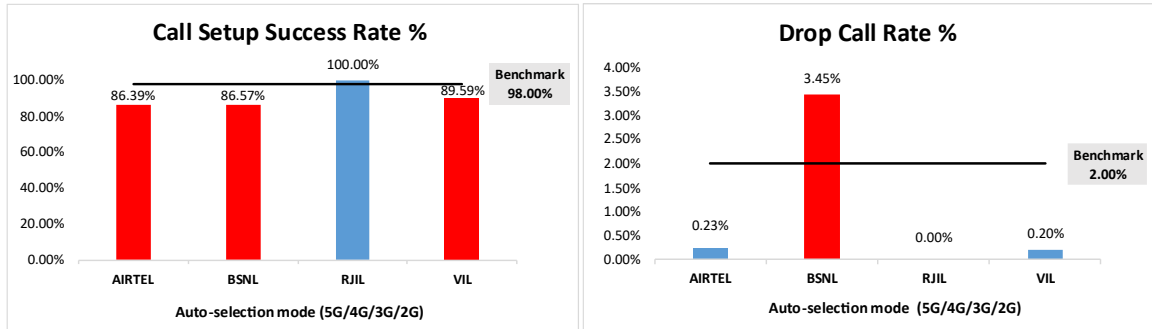

**Figure-3:** Performance for call setup success rate and drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	415	414	421	403
Number of silence call for >4 Sec	2	18	6	9
Silence Call Rate %	0.48	4.35	1.43	2.23
Number of silence instances for >4 Sec	2	19	8	12
Number of silence instances for >3 Sec	6	27	9	16
Number of silence instances for >2 sec	13	49	25	39
RTP Jitter (4G & 5G) in ms	3.21	14.30	7.28	15.85
Packet loss Rate Downlink %	0.36	8.12	0.26	0.81
Packet loss Rate Uplink %	0.19	8.18	0.52	0.99

**Table-6:** Summary of silence instances & packet loss rate for mobile-to-mobile call.

Number of unique cell id's covered in Voice test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	434	NA
4G	1030	312	1515	986
3G	NA	44	NA	NA
2G	2	79	NA	0

**Table-7:** Technology wise number of network cell id's latched during drive test.

**Note-**

- NA- Service provider doesn't provide services on respective technology.


<sup>2</sup>RO Delhi has conveyed that Airtel has provided its comment that the Call Setup Time (CST) is on the higher side, while the Call Setup Success Rate (CSSR) remains relatively low due to the Pre-Call Announcement (PCA) mandated by the DoT for customer awareness.

**(c) Mean Opinion Score (MOS) performance for speech quality:**

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile- to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-6	1950	2205	2643	2450
Speech Quality (Average MOS)	4.01	2.73	3.89	4.40
Number of samples with MOS $\geq 4$ to $<5$ (Excellent)	1645	267	1873	2053
Number of samples with MOS $\geq 3$ to $<4$ (Good)	253	612	596	289
Number of samples with MOS $\geq 2$ to $<3$ (Fair)	32	790	123	76
Number of samples with MOS $\geq 1$ to $<2$ (Poor)	20	536	51	32
%age of samples with MOS $\geq 4$ to $<5$ (Excellent)	84.36%	12.11%	70.87%	83.80%
%age of samples with MOS $\geq 3$ to $<4$ (Good)	12.97%	27.76%	22.55%	11.80%
%age of samples with MOS $\geq 2$ to $<3$ (Fair)	1.64%	35.83%	4.65%	3.10%
%age of samples with MOS $\geq 1$ to $<2$ (Poor)	1.03%	24.31%	1.93%	1.31%

**Table-8:** Summary of speech quality (MOS) samples.

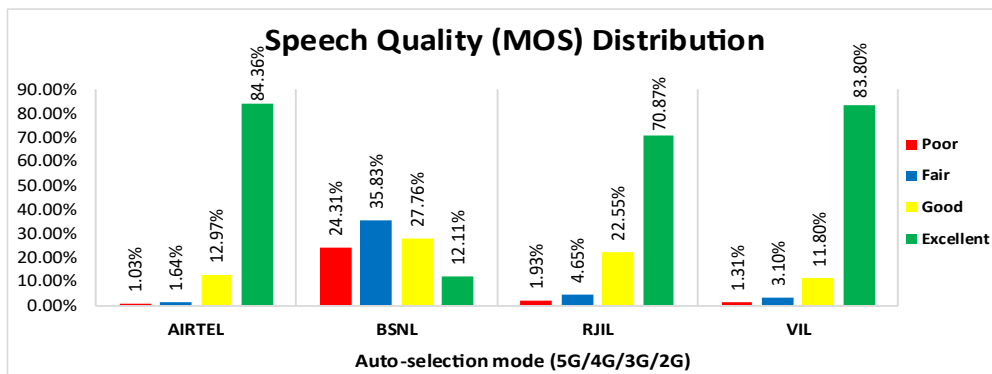

**Figure- 4:** Distribution of samples in MOS range.

**(d) Inter-service provider voice call performance:** To check the performance of inter-service provider call setup success rate at Meerut Railway Station and Meerut Roadways Bus Stand, total 19 to 28 inter operator calls were attempted. The Call setup success rate and call setup time observation is as below.

Call Setup Success Rate %				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	100.00	100.00	100.00
BSNL	100.00	NA	100.00	100.00
RJIL	94.44	100.00	NA	100.00
VIL	100.00	100.00	91.30	NA

**Table-9:** Call setup success rate across service providers

**Note-**

- NA- Only inter-operator calls were measured during test.

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	24.91	23.91	23.62
BSNL	3.24	NA	3.50	2.66
RJIL	1.87	3.01	NA	1.63
VIL	3.38	3.03	2.16	NA

**Table-10:** Call setup time across service providers.

**Note-**


- NA- Only inter-operator calls were measured during test.

### 3.3 Data performance

#### (a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	143.86	4.06	246.47	49.68
	80th Percentile	239.56	6.96	401.49	76.78
	20th Percentile	23.69	0.97	61.49	20.62
Upload Throughput (Mbits/s)	Average	28.40	4.12	34.08	14.58
	80th Percentile	48.97	6.71	61.46	22.99
	20th Percentile	8.47	1.31	7.28	5.14
Latency (ms)	50th Percentile	16.10	31.15	14.50	34.95

**Table-11:** Summary of data performance in network auto-selection mode.

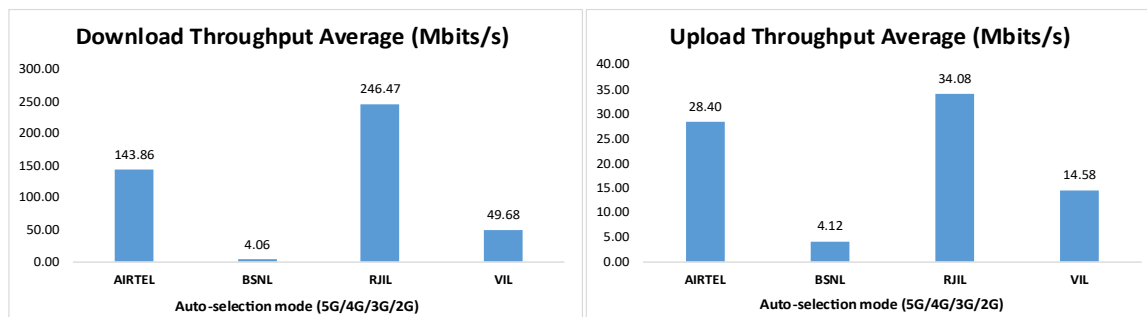

**Figure- 5:** Download and upload throughput.

Number of unique cell id's covered in Data test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	636	NA
4G	1065	283	202	971
3G	NA	87	NA	NA
2G	0	5	NA	0

**Table-12:** Technology wise number of network cell id's latched during drive test.

**Note-**

- NA- Service provider doesn't provide services in respective technology.

## **Detailed QoS Performance Analysis**

## 4. Detailed QoS performance analysis

### 4.1 Overview

This section covers analysis on performance of various categories of drives like city, hotspots and highway for all telecom service providers, the results of drive tests conducted are shown individually for respective areas/locations.

### 4.2 City

Drive test has been conducted on 2<sup>nd</sup> June 2025 and 3<sup>rd</sup> June 2025 in Meerut. (refer table-1)

#### 4.2.1 Drive test route

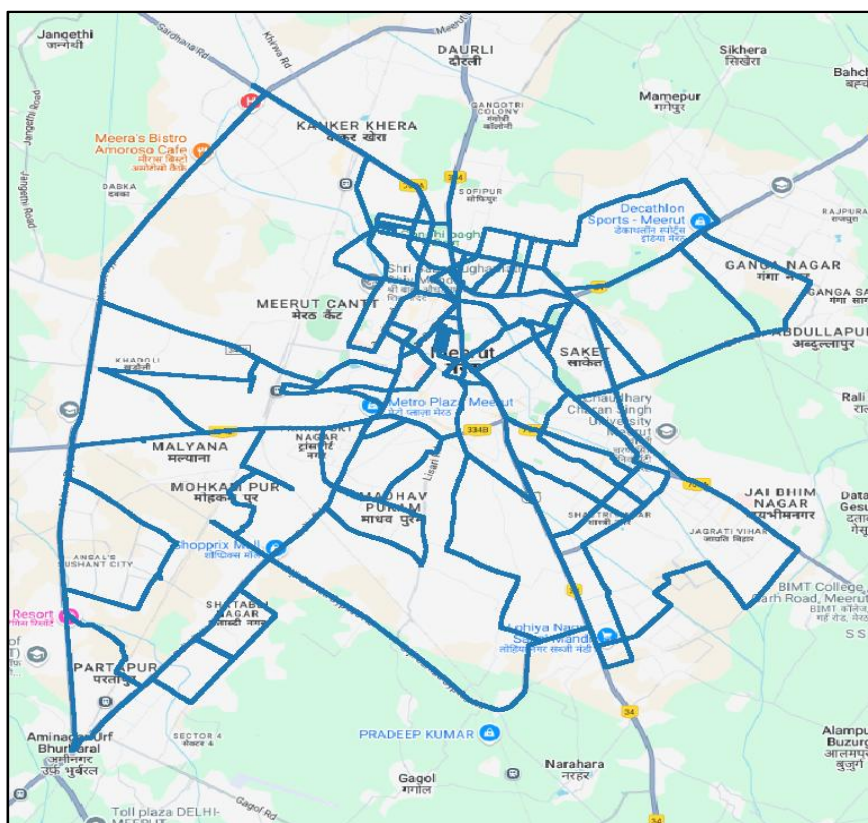


Figure- 6: Drive test routes.

#### 4.2.2 Areas covered


Ganga Nagar, Jai Bheem Nagar, Lohia Nagar, Madhav Puram, Partapur, Malyana, Dabka, Kanker Khera, Meerut Cantt & Saket etc.

#### 4.2.3 Voice performance


**(a) Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	573	503	386
Call Setup Success Rate %	37.52	94.04	98.96
Drop Call Rate %	1.40	1.69	0.79
Call Setup Time-Average (Second)	13.29	3.50	4.76
Handover Success Rate %	98.83	99.34	99.22

**Table-13:** Summary of voice call performance in 3G/2G network mode only.

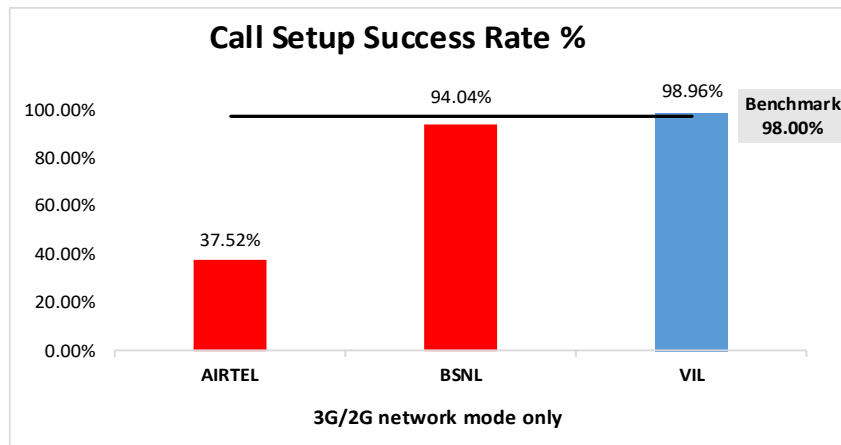

**Figure-7:** Performance for call setup success rate.

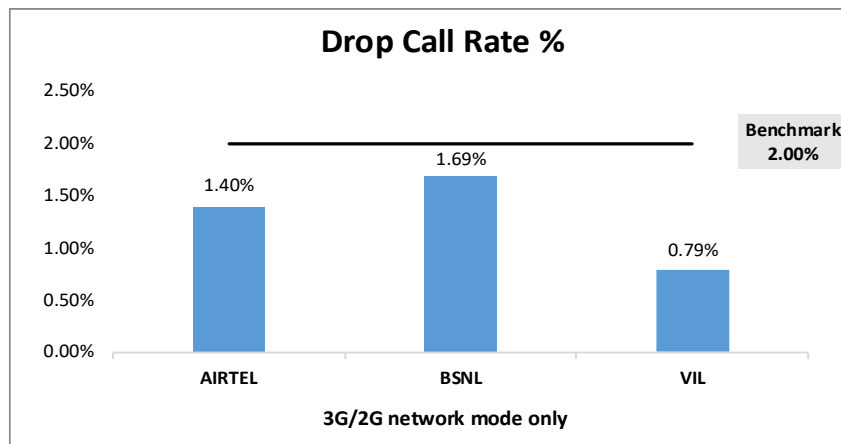


**Figure-8:** Performance for drop call rate.

**(a) Network Technology:** This section represents time spent on various network technologies.


Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	73.23%	NA
2G	99.94%	26.30%	99.91%
Limited Service	0.06%	0.47%	0.09%

**Table-14:** Time spent on technology during drive test 3G/2G network mode only.




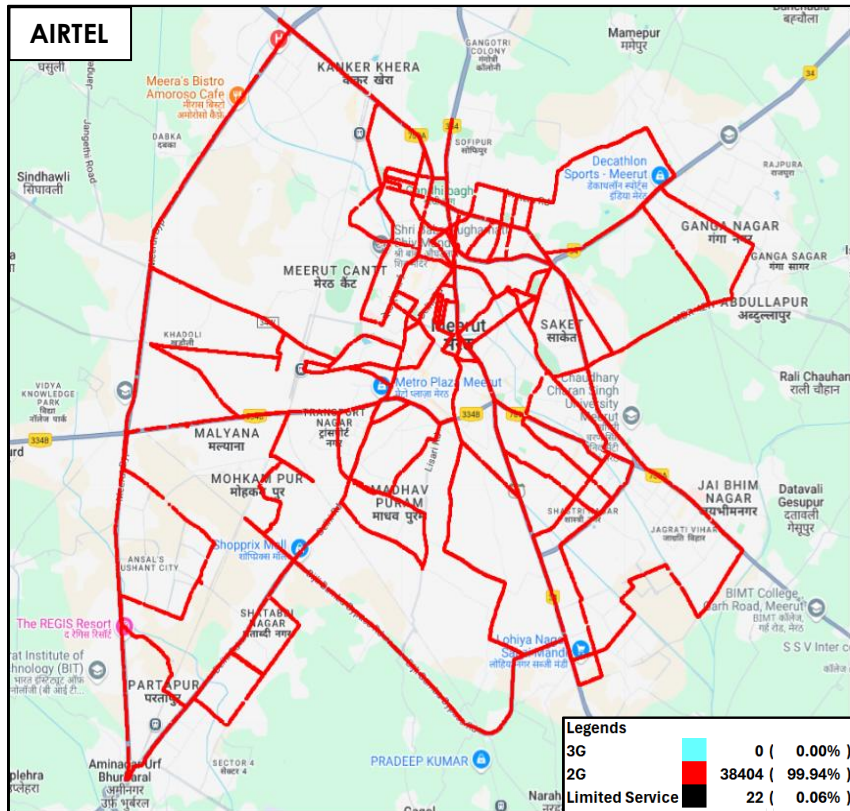

**Figure-9:** Serving technology plots 3G/2G network mode-AIRTEL.

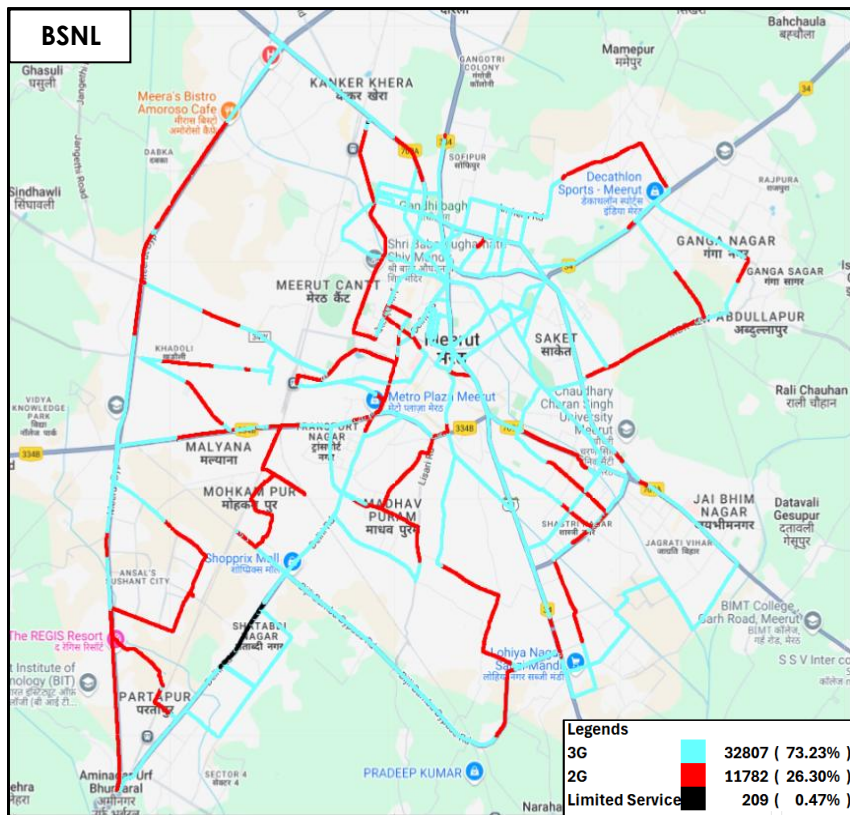


**Figure-10:** Serving technology plots 3G/2G network mode – BSNL.

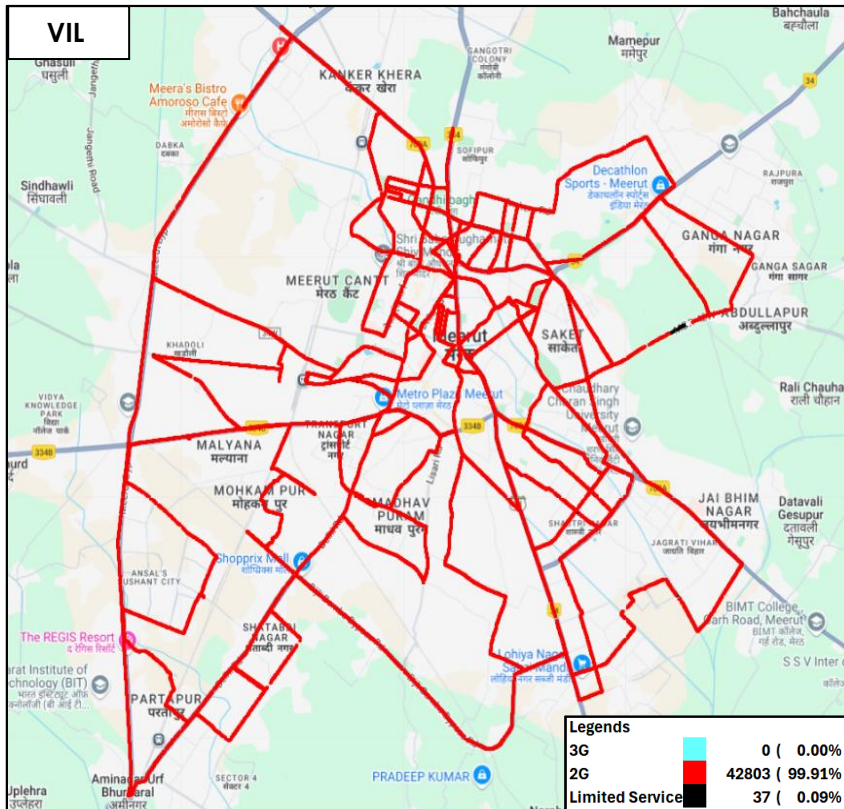

**Figure-11:** Serving technology plots 3G/2G network mode –VIL.

**(c) Network Signal Strength distribution:** The following chart represents signal strength distribution for 3G/2G network mode only. (refer figure-41, 42 & 43 for map view)

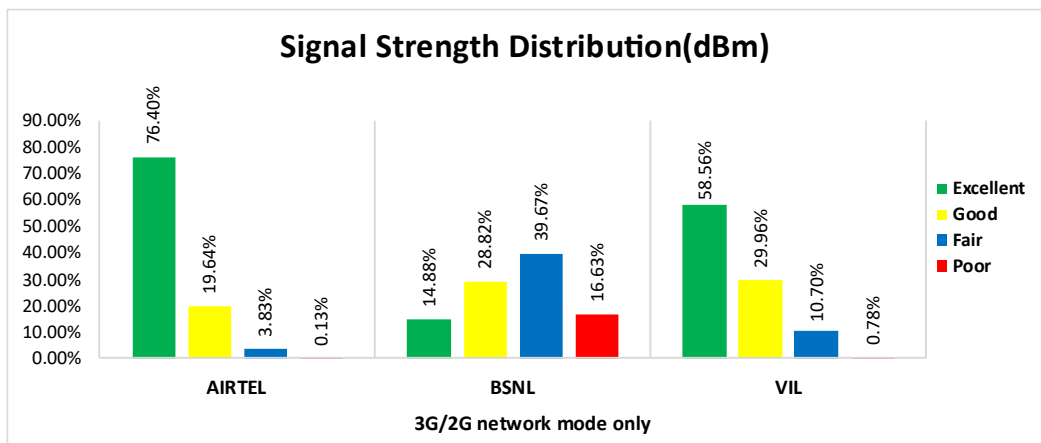

**Figure-12:** Signal strength distribution 3G/2G network mode only.

**Observations:**


- Airtel has 76% of samples falling in the excellent signal strength category.
- BSNL has 15% of samples falling in the excellent signal strength category.
- VIL has 59% of samples falling in the excellent signal strength category.




**(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)**

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	387	533	412	441
Call Setup Success Rate %	84.50	87.05	100.00	87.98
Drop Call Rate %	0.00	2.37	0.00	0.26
Call Setup Time Average (Second)	22.88	3.01	0.68	0.97
Handover Success Rate %	99.94	100.00	99.87	99.94

**Table-15:** Summary of voice call performance in network auto-selection mode.

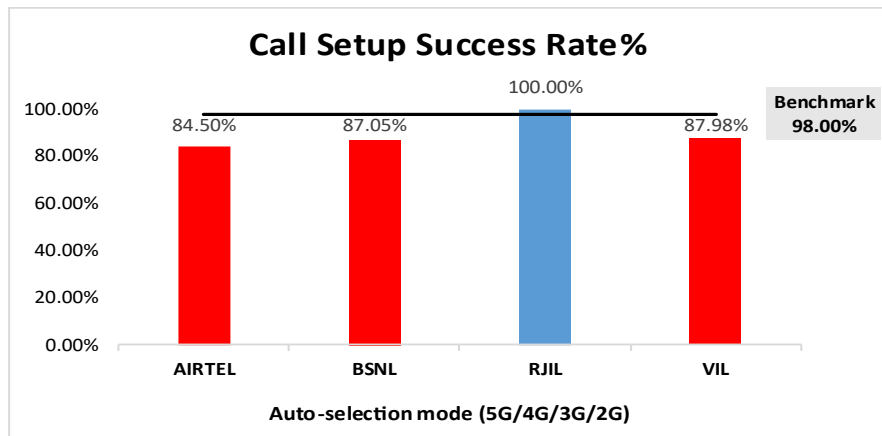

**Figure-13:** Performance for call setup success rate.

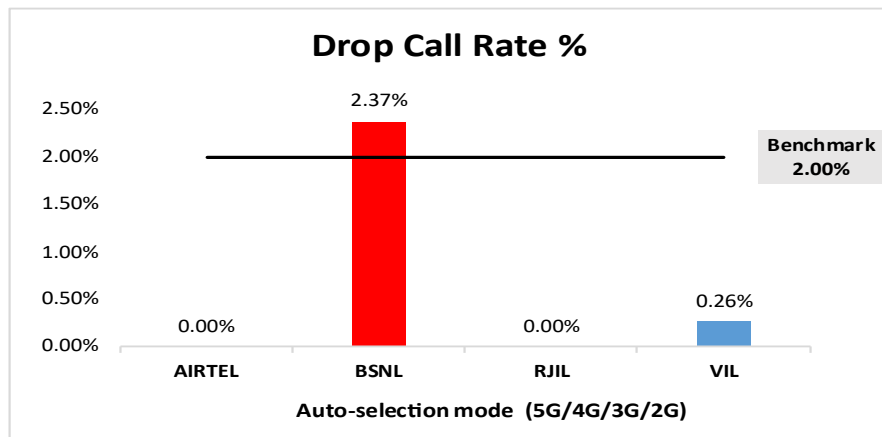

**Figure-14:** Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	389	373	396	377
Number of silence call for >4 Sec	2	15	4	6
Silence Call Rate %	0.51	4.02	1.01	1.59
Number of silence instances for >4 Sec	2	16	6	8
Number of silence instances for >3 Sec	5	21	7	11
Number of silence instances for >2 sec	10	35	16	28
RTP Jitter (4G & 5G) in ms	3.18	14.06	7.15	15.80
Packet loss Rate Downlink %	0.32	7.87	0.24	0.75
Packet loss Rate Uplink %	0.17	7.91	0.48	0.98


**Table-16:** Summary of silence instances & packet loss rate for mobile to mobile call.

### (e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-16	1698	1891	2324	2141
Speech Quality (Average MOS)	4.02	2.79	3.90	4.40
Number of samples with MOS $\geq 4$ to $<5$ (Excellent)	1447	243	1665	1787
Number of samples with MOS $\geq 3$ to $<4$ (Good)	210	563	519	259
Number of samples with MOS $\geq 2$ to $<3$ (Fair)	28	659	103	73
Number of samples with MOS $\geq 1$ to $<2$ (Poor)	13	426	37	22
%age of samples with MOS $\geq 4$ to $<5$ (Excellent)	85.22%	12.85%	71.64%	83.47%
%age of samples with MOS $\geq 3$ to $<4$ (Good)	12.37%	29.77%	22.33%	12.10%
%age of samples with MOS $\geq 2$ to $<3$ (Fair)	1.65%	34.85%	4.43%	3.41%
%age of samples with MOS $\geq 1$ to $<2$ (Poor)	0.77%	22.53%	1.59%	1.03%

**Table-17:** Summary of speech quality (MOS) samples.

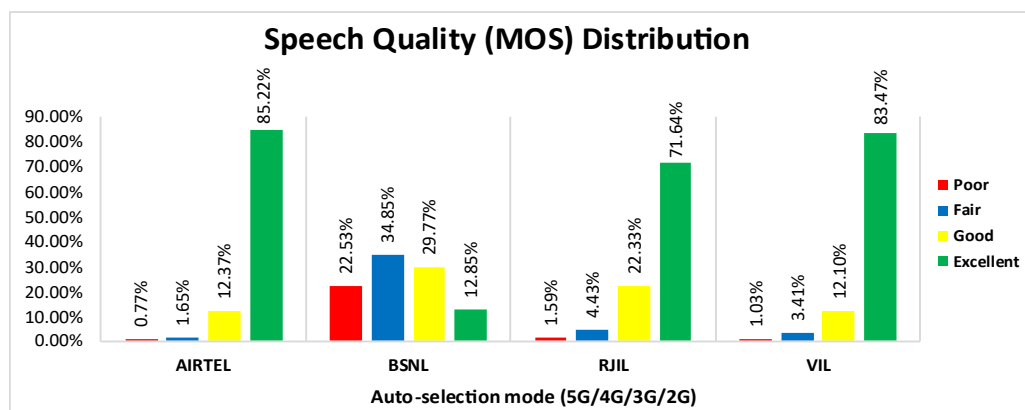

**Figure-15:** Distribution of samples in MOS range.


**(f) Network Technology:** This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	2.64%	NA	17.45%	NA
4G	97.31%	78.76%	82.55%	100.00%
3G	NA	9.48%	NA	NA
2G	0.00%	11.70%	NA	0.00%
Limited Service	0.05%	0.07%	0.00%	0.00%


**Table-18:** Time spent on technology during drive test.

**Note-**


- NA- Service provider doesn't provide services in respective technology.

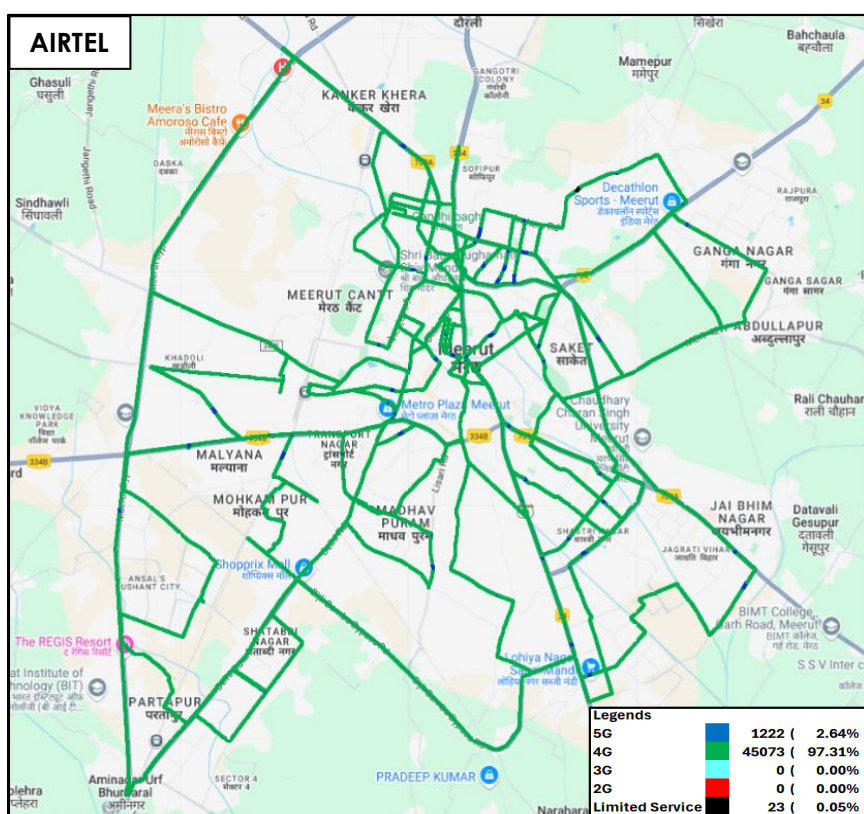

**Figure-16:** Serving technology plots in auto-selection mode (5G/4G/3G/2G) –AIRTEL.

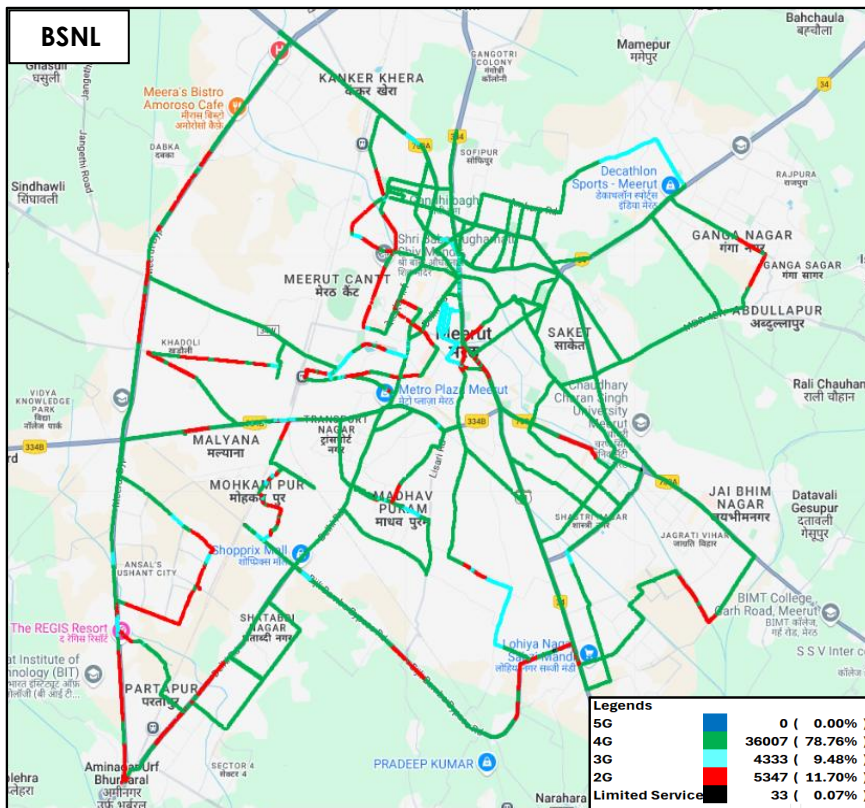


**Figure-17:** Serving technology plots in auto-selection mode (5G/4G/3G/2G) –BSNL.

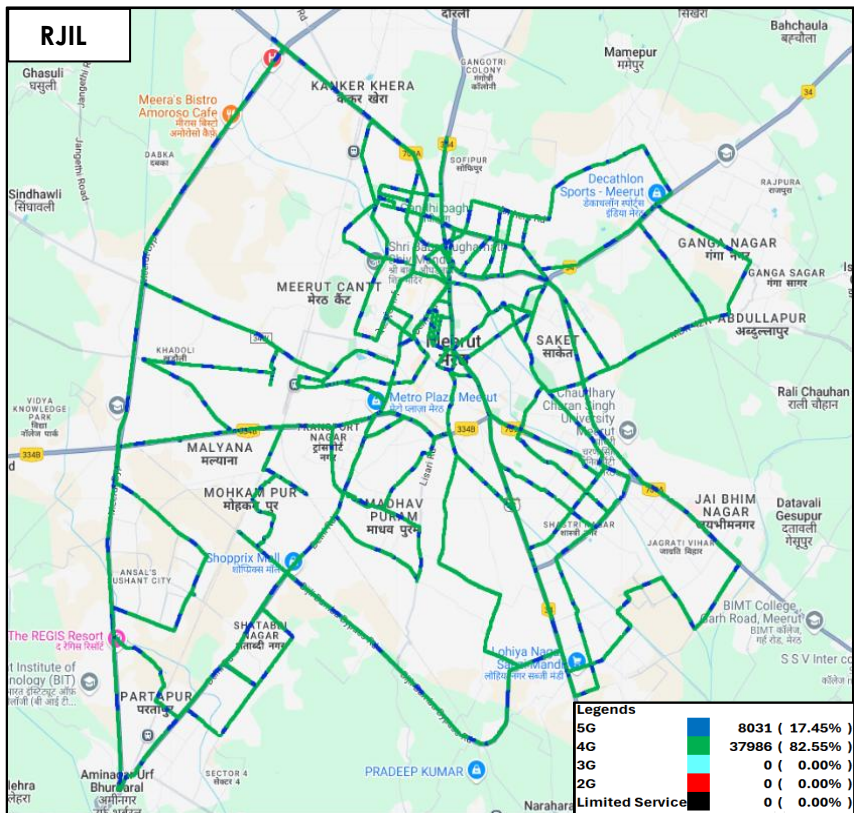


**Figure-18:** Serving technology plots in auto-selection (5G/4G/3G/2G)- RJIL.



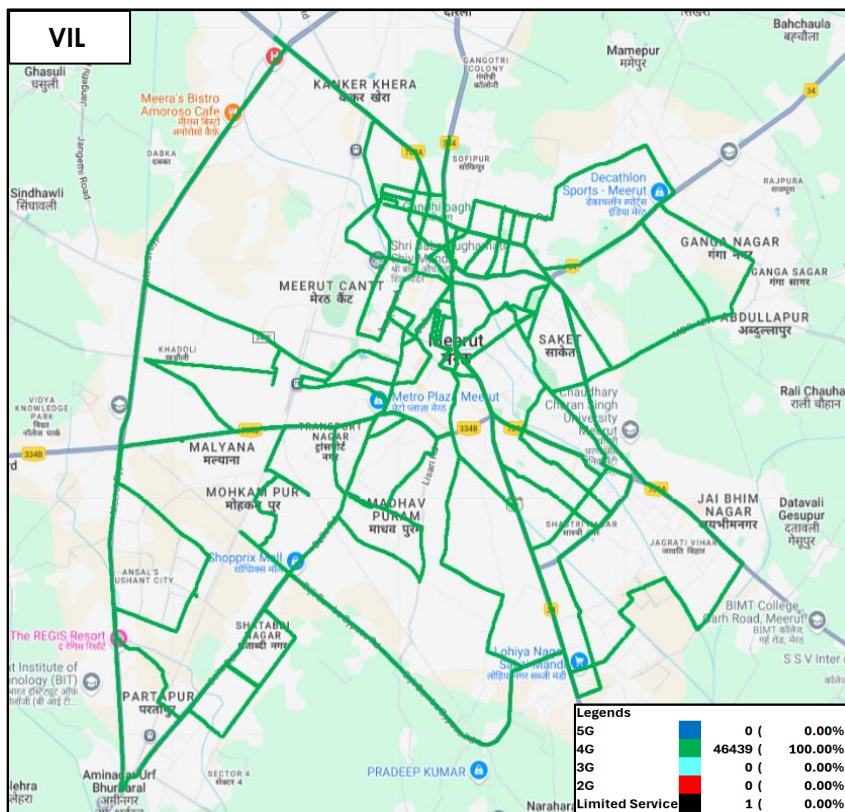

**Figure-19:** Serving technology plots in auto-selection mode (5G/4G/3G/2G) – VIL.

**(g) Network Signal Strength distribution:** The following chart provide signal strength distribution for auto-selection mode (5G/4G/3G/2G). (refer figure-44, 45, 46 & 47 for map view)

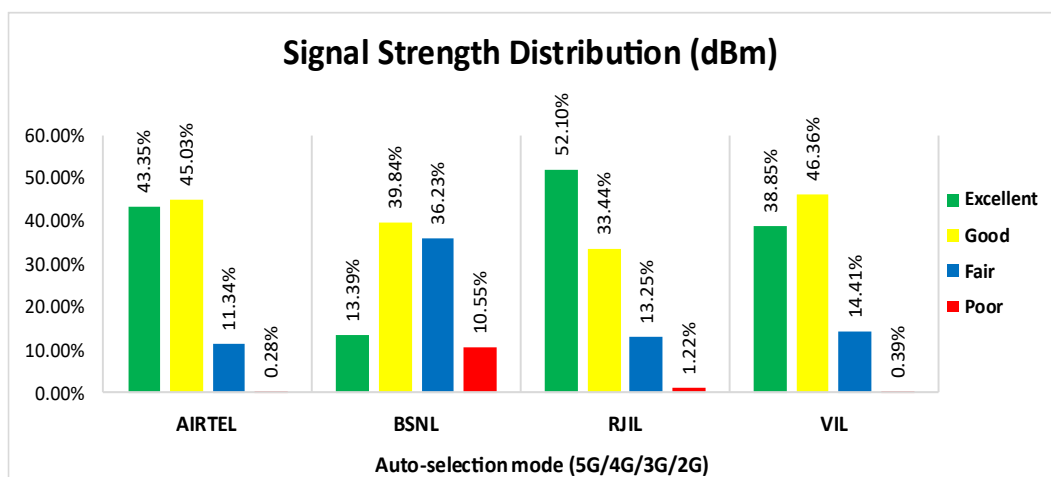

**Figure-20:** Signal strength distribution auto-selection mode 5G/4G/3G/2G.

**Observations:**


- Airtel has 43% of samples falling in the excellent signal strength category.
- BSNL has 13% of samples falling in the excellent signal strength category.
- RJIL has 52% of samples falling in the excellent signal strength category.
- VIL has 39% of samples falling in the excellent signal strength category.

## 4.2.4 Data performance


### (a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	150.59	4.32	267.14	53.28
	80th Percentile	258.45	7.33	423.93	84.25
	20th Percentile	22.68	0.97	105.85	22.88
Upload Throughput (Mbits/s)	Average	28.99	4.27	36.28	15.64
	80th Percentile	50.12	7.02	63.05	23.83
	20th Percentile	7.98	1.36	7.74	6.51
Latency (ms)	50th Percentile	16.00	30.30	14.15	33.90

**Table-19:** Summary of Data performance in network auto-selection mode.

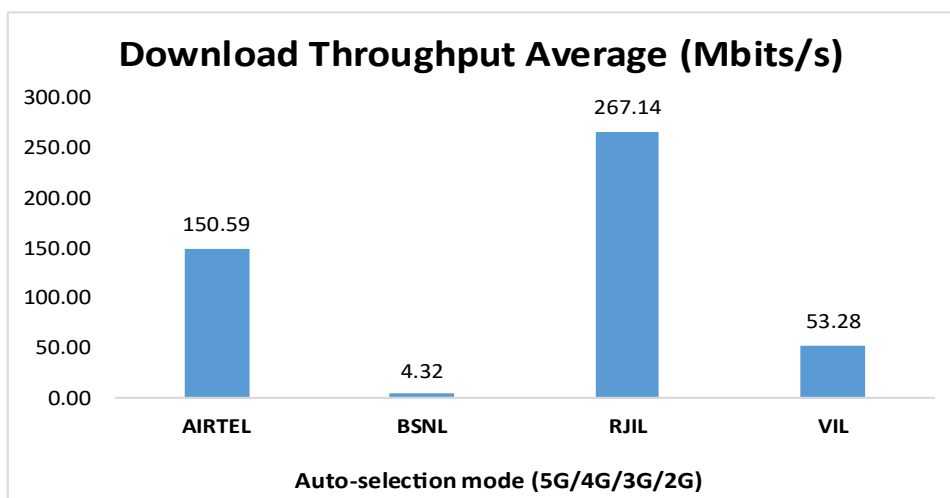

**Figure- 21:** Download throughput.

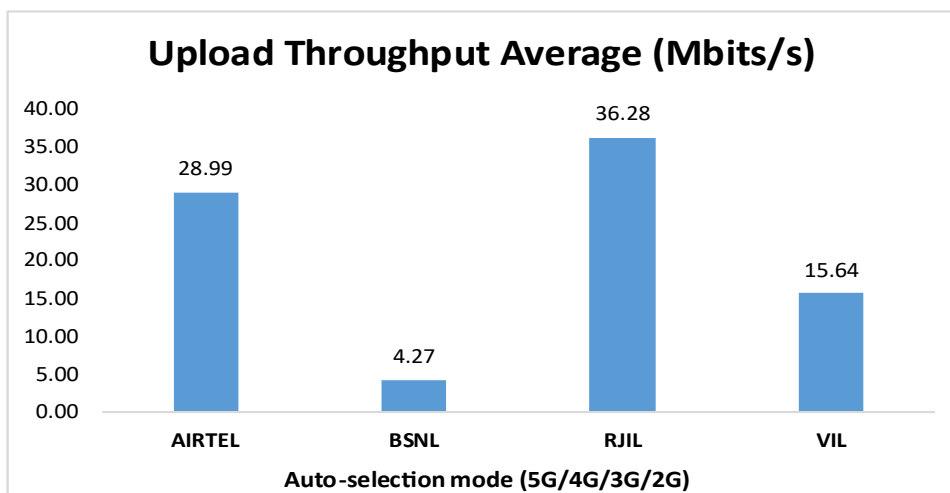


**Figure- 22:** Upload throughput.

## 4.3 Hotspots

Hotspot testing has been done on 4<sup>th</sup> June 2025. Nine locations have been tested in the city.

### 4.3.1 Locations

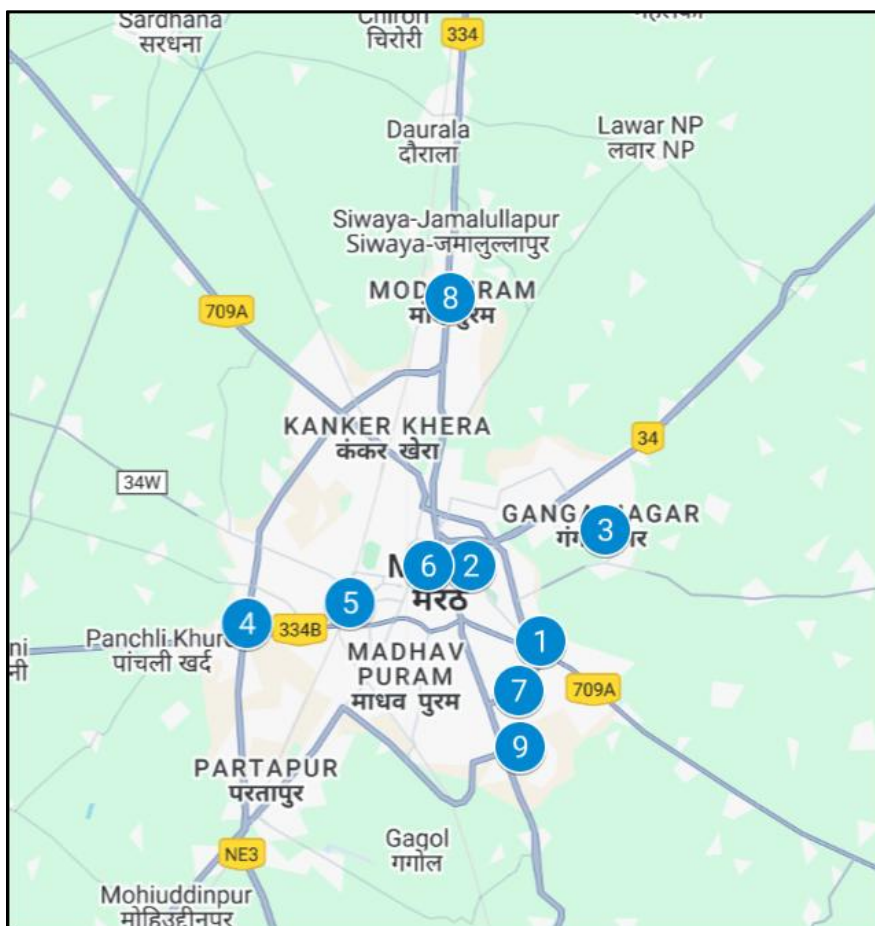

**Figure- 23:** Hotspot locations

### 4.3.2 Hotspot covered

1. Chaudhary Charan Singh University
2. District and Sessions Court, Meerut
3. IIMT University
4. Meerut Institute of Engineering and Technology
5. Meerut Railway Station
6. Meerut Roadways Bus Stand
7. PVS Mall
8. SDS Global Super Speciality Hospital
9. St. Francis World School

### 4.3.3 Voice performance

Overall Voice Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	90	90	90	90
Call Setup Success Rate %	92.22	94.44	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	22.81	2.38	0.65	0.65

**Table-20:** Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Chaudhary Charan Singh University				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	22.95	2.44	0.77	0.58

**Table-21:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

District and Sessions Court, Meerut				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	50.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	22.82	2.05	0.63	0.57

**Table-22:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

IIMT University				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	21.56	2.25	0.71	0.78

**Table-23:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Meerut Institute of Engineering and Technology				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	22.78	2.34	0.60	0.57

**Table-24:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).



Meerut Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	23.31	2.15	0.70	0.76

**Table-25:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Meerut Roadways Bus Stand				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	23.23	2.35	0.57	0.64

**Table-26:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

PVS Mall				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	22.82	2.58	0.64	0.60

**Table-27:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

SDS Global Super Speciality Hospital				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	30.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	22.84	2.08	0.58	0.63

**Table-28:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

St. Francis World School				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Sec)	22.95	2.99	0.61	0.77

**Table-29:** Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

#### 4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	73.12	3.55	186.69	37.18
Download Throughput 80th Percentile (Mbit/s)	116.91	5.20	285.79	58.46
Download Throughput 20th Percentile (Mbit/s)	12.65	1.69	26.59	16.17
Download Session Setup Success Rate %	100.00	95.56	100.00	82.22
Upload Throughput Average (Mbits/s)	19.42	5.07	28.01	10.36
Upload Throughput 80th Percentile (Mbit/s)	28.96	7.15	48.98	16.51
Upload Throughput 20th Percentile (Mbit/s)	7.10	2.04	4.63	2.39
Upload Session Setup Success Rate %	100.00	91.11	100.00	95.56
Web Browsing Delay (Second)	1.70	2.36	1.68	1.95
Youtube Initial Buffer Delay (Second)	0.81	2.33	0.82	1.18
Latency (ms)-50th Percentile	15.40	31.30	14.40	39.10
Jitter (ms)	12.55	11.72	6.97	21.29
Packet Loss Rate%	1.03	8.18	0.12	12.61
Packet Loss Rate- 90th percentile	2.06	21.82	0.32	30.32

**Table-30:** Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Chaudhary Charan Singh University				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	4.31	1.24	27.18	26.92
Download Session Setup Success Rate %	100.00	100.00	100.00	80.00
Upload Throughput Average (Mbits/s)	2.37	1.20	2.00	3.35
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.24	3.17	1.80	1.59
Youtube Initial Buffer Delay (Second)	1.30	4.75	1.29	1.01
Latency (ms)-50th Percentile	20.65	32.45	17.30	42.00
Jitter (ms)	29.41	15.97	26.81	3.77
Packet Loss Rate%	3.90	18.90	0.80	0.20

**Table-31:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

District and Sessions Court, Meerut				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	60.40	5.32	756.11	25.42
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	8.95	7.06	81.82	2.33
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	1.85	2.31	1.58	1.67
Youtube Initial Buffer Delay (Second)	0.78	1.17	0.54	1.26
Latency (ms)-50th Percentile	14.50	29.60	10.38	30.50
Jitter (ms)	11.76	6.67	2.42	6.59
Packet Loss Rate%	1.60	2.70	0.00	0.10

**Table-32:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

IIMT University				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	35.56	3.39	110.60	77.51
Download Session Setup Success Rate %	100.00	100.00	100.00	80.00
Upload Throughput Average (Mbits/s)	8.72	2.63	21.17	2.81
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	1.61	2.49	1.77	1.55
Youtube Initial Buffer Delay (Second)	0.87	3.31	1.12	0.88
Latency (ms)-50th Percentile	13.05	29.93	29.78	33.55
Jitter (ms)	8.44	7.14	3.65	2.81
Packet Loss Rate%	0.20	3.70	0.00	0.00

**Table-33:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Meerut Institute of Engineering and Technology				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	113.83	8.50	170.82	55.29
Download Session Setup Success Rate %	100.00	100.00	100.00	80.00
Upload Throughput Average (Mbits/s)	30.54	14.32	34.47	29.31
Upload Session Setup Success Rate %	100.00	100.00	100.00	60.00
Web Browsing Delay (Second)	1.76	2.69	1.38	1.49
Youtube Initial Buffer Delay (Second)	0.96	1.10	0.69	0.65
Latency (ms)-50th Percentile	29.33	30.40	12.85	34.50
Jitter (ms)	12.89	4.38	4.03	2.23
Packet Loss Rate%	0.60	1.50	0.00	0.00

**Table-34:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Meerut Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	133.08	1.47	159.14	5.55
Download Session Setup Success Rate %	100.00	80.00	100.00	100.00
Upload Throughput Average (Mbits/s)	15.36	4.08	9.63	1.75
Upload Session Setup Success Rate %	100.00	40.00	100.00	100.00
Web Browsing Delay (Second)	1.53	2.69	1.54	3.51
Youtube Initial Buffer Delay (Second)	0.80	1.57	0.55	4.30
Latency (ms)-50th Percentile	14.80	26.50	11.80	61.50
Jitter (ms)	7.54	9.19	5.26	142.46
Packet Loss Rate%	0.60	5.90	0.00	12.90

**Table-35:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Meerut Roadways Bus Stand				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	146.35	1.98	35.18	63.25
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	17.56	1.93	5.34	13.53
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	1.60	2.67	1.92	1.66
Youtube Initial Buffer Delay (Second)	0.63	3.76	0.96	0.77
Latency (ms)-50th Percentile	14.50	39.25	16.65	26.65
Jitter (ms)	3.90	39.15	3.51	4.08
Packet Loss Rate%	0.10	33.50	0.00	0.10

**Table-36:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

PVS Mall				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	63.91	3.54	313.50	35.34
Download Session Setup Success Rate %	100.00	80.00	100.00	100.00
Upload Throughput Average (Mbits/s)	46.15	5.61	81.83	38.11
Upload Session Setup Success Rate %	100.00	80.00	100.00	100.00
Web Browsing Delay (Second)	1.49	1.82	1.93	2.51
Youtube Initial Buffer Delay (Second)	0.73	1.61	0.61	0.67
Latency (ms)-50th Percentile	12.80	34.93	14.73	44.95
Jitter (ms)	5.31	4.65	7.27	5.10
Packet Loss Rate%	0.70	3.80	0.20	0.10

**Table-37:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

SDS Global Super Speciality Hospital				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	58.55	2.97	26.17	26.21
Download Session Setup Success Rate %	100.00	100.00	100.00	60.00
Upload Throughput Average (Mbits/s)	31.62	3.09	10.21	4.18
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	1.68	2.02	1.39	1.87
Youtube Initial Buffer Delay (Second)	0.62	2.33	0.80	1.10
Latency (ms)-50th Percentile	22.35	32.15	13.20	-
Jitter (ms)	28.55	11.60	2.87	-
Packet Loss Rate%	1.60	1.20	0.10	100

**Table-38:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

**Note**-"-" Ping test were failed.

St. Francis World School				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	42.12	3.10	81.56	5.11
Download Session Setup Success Rate %	100.00	100.00	100.00	40.00
Upload Throughput Average (Mbits/s)	13.50	5.24	5.64	5.50
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	1.61	1.77	1.79	1.70
Youtube Initial Buffer Delay (Second)	0.97	1.34	0.86	1.19
Latency (ms)-50th Percentile	12.75	31.90	14.90	46.55
Jitter (ms)	5.21	13.06	6.95	3.92
Packet Loss Rate%	0.00	2.40	0.00	0.10

**Table-39:** Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

#### 4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)

Overall Data Performance					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	193.88	-	283.25	-
	Upload Throughput Average (Mbits/s)	58.82	-	31.85	-
4G	Download Throughput Average (Mbits/s)	21.10	3.78	27.80	32.76
	Upload Throughput Average (Mbits/s)	13.99	7.19	12.56	9.98

**Table-40:** Overall Summary of 5G only & 4G only data download & upload speed.

**Note-** “-”Respective technology was not observed during the test.

Chaudhary Charan Singh University					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	343.28	-	201.49	-
	Upload Throughput Average (Mbits/s)	7.55	-	9.47	-
4G	Download Throughput Average (Mbits/s)	3.97	1.08	11.75	16.44
	Upload Throughput Average (Mbits/s)	4.03	2.85	2.40	4.62

**Table-41:** Summary of data download & upload speed 5G only & 4G only.

**Note-** “-”Respective technology was not observed during the test.

District and Sessions Court, Meerut					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	205.53	-	641.25	-
	Upload Throughput Average (Mbits/s)	117.69	-	41.06	-
4G	Download Throughput Average (Mbits/s)	40.61	5.94	22.25	30.58
	Upload Throughput Average (Mbits/s)	13.67	7.01	23.63	8.87

**Table-42:** Summary of 5G only & 4G only data download & upload speed.

**Note-** “-”Respective technology was not observed during the test.

IIMT University					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	76.89	-
	Upload Throughput Average (Mbits/s)	-	-	15.55	-
4G	Download Throughput Average (Mbits/s)	11.21	3.18	14.75	49.35
	Upload Throughput Average (Mbits/s)	19.38	5.26	2.26	10.93

**Table-43:** Summary of 5G only & 4G only data download & upload speed.

<b>Note-</b> "--Respective technology was not observed during the test.					
Meerut Institute of Engineering and Technology					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	175.59	-	232.25	-
	Upload Throughput Average (Mbits/s)	33.04	-	36.69	-
4G	Download Throughput Average (Mbits/s)	22.11	8.58	91.48	48.08
	Upload Throughput Average (Mbits/s)	14.42	15.02	27.32	3.93

**Table-44:** Summary of 5G only & 4G only data download & upload speed.

<b>Note-</b> "--Respective technology was not observed during the test.					
Meerut Railway Station					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	318.19	-	117.25	-
	Upload Throughput Average (Mbits/s)	28.30	-	3.82	-
4G	Download Throughput Average (Mbits/s)	20.62	2.74	24.33	6.39
	Upload Throughput Average (Mbits/s)	8.81	9.38	3.67	3.23

**Table-45:** Summary of 5G only & 4G only data download & upload speed.

<b>Note-</b> "--Respective technology was not observed during the test.					
Meerut Roadways Bus Stand					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	74.38	-	326.54	-
	Upload Throughput Average (Mbits/s)	16.31	-	29.82	-
4G	Download Throughput Average (Mbits/s)	18.32	2.89	23.45	44.66
	Upload Throughput Average (Mbits/s)	21.37	3.39	4.38	16.04

**Table-46:** Summary of 5G only & 4G only data download & upload speed.

<b>Note-</b> "--Respective technology was not observed during the test.					
PVS Mall					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	57.00	-	378.38	-
	Upload Throughput Average (Mbits/s)	79.99	-	97.99	-
4G	Download Throughput Average (Mbits/s)	24.28	2.23	19.88	33.19
	Upload Throughput Average (Mbits/s)	13.11	6.28	25.90	25.84

**Table-47:** Summary of 5G only & 4G only data download & upload speed.

<b>Note-</b> "--Respective technology was not observed during the test.					
---	--	--	--	--	--

SDS Global Super Speciality Hospital					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	334.12	-
	Upload Throughput Average (Mbits/s)	-	-	38.77	-
4G	Download Throughput Average (Mbits/s)	35.76	4.04	22.63	54.34
	Upload Throughput Average (Mbits/s)	22.72	7.31	20.32	9.04

**Table-48:** Summary of 5G only & 4G only data download & upload speed.

**Note-** “-”Respective technology was not observed during the test.

St. Francis World School					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	205.19	-	241.03	-
	Upload Throughput Average (Mbits/s)	15.11	-	13.51	-
4G	Download Throughput Average (Mbits/s)	8.45	3.34	19.70	11.79
	Upload Throughput Average (Mbits/s)	8.39	8.22	3.14	6.06


**Table-49:** Summary of 5G only & 4G only data download & upload speed.

**Note-** “-”Respective technology was not observed during the test.

## 4.4 Highway

Drive test has been conducted on 2<sup>nd</sup> June 2025 covering one highway route. (Refer Table-1)

### 4.4.1 Drive test route

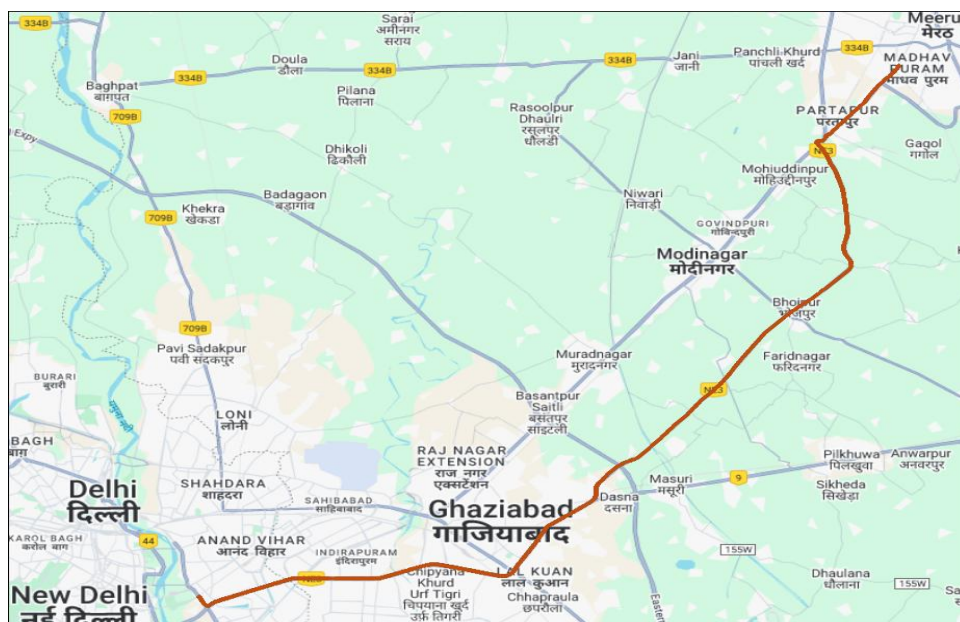

**Figure-24:** Drive test route highway.

### 4.4.2 Routes Covered

Delhi to Meerut via NE-3 passing through Lal Kuan, Kalchhina, Bhojpur and Aminagar Urf Bhurbaral.


### 4.4.3 Voice performance

**(a) Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.


Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	70	45	31
Call Setup Success Rate %	20.00	73.33	93.55
Drop Call Rate %	7.14	15.15	0.00
Call Setup Time-Average (Second)	4.85	5.49	5.13
Handover Success Rate %	92.19	99.62	97.31

**Table-50:** Summary of voice call performance in 3G/2G network mode only.



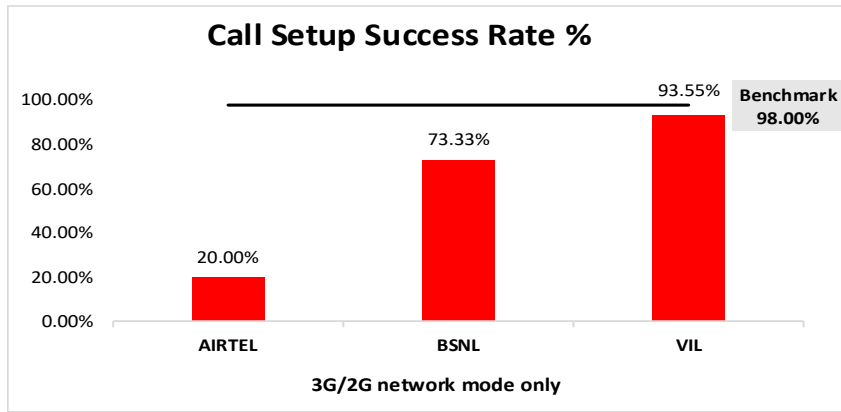

**Figure-25:** Performance for call setup success rate.

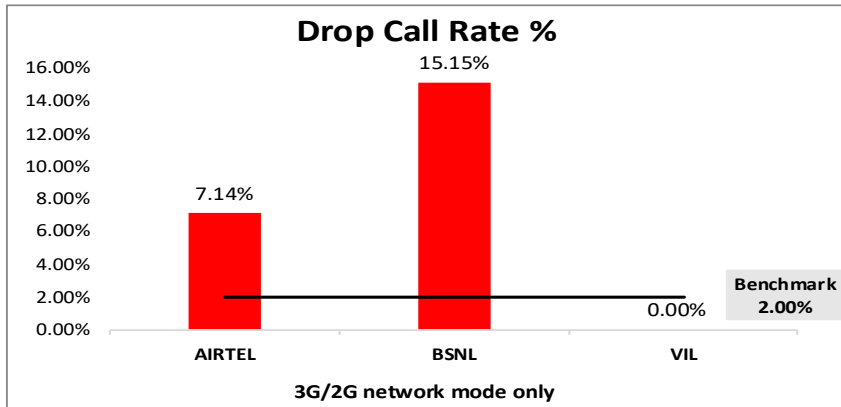


**Figure-26:** Performance for drop call rate.


**(b) Network Technology:** This section represents time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	80.59%	NA
2G	99.81%	15.80%	99.91%
Limited Service	0.19%	3.61%	0.09%


**Table-51:** Time spent on technology during drive test 3G/2G network mode only.

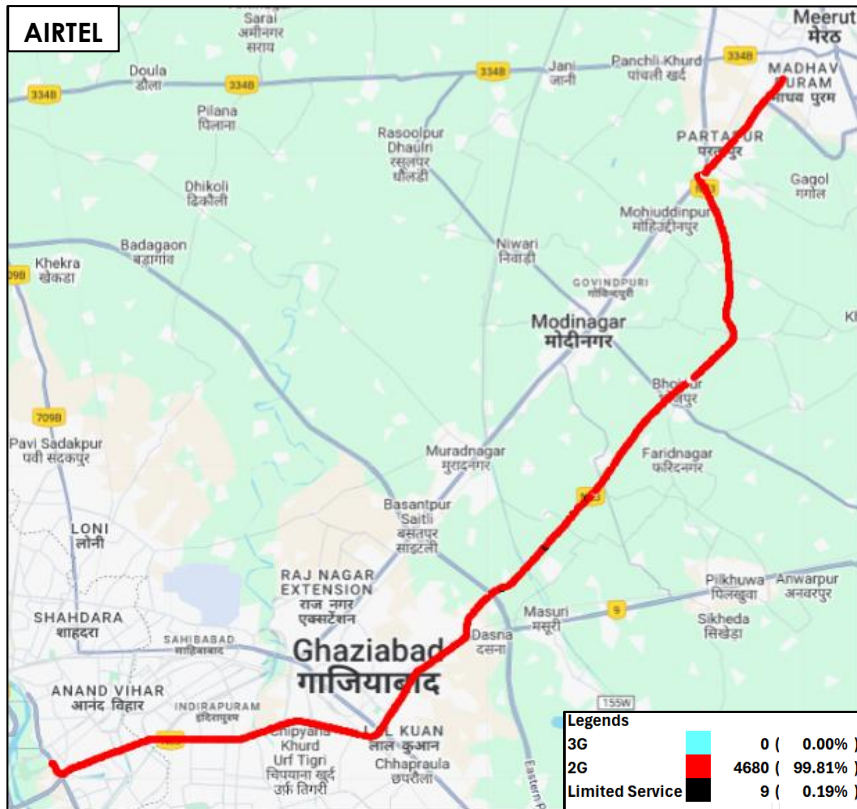

**Figure-27:** Serving technology plots 3G/2G network mode-AIRTEL.

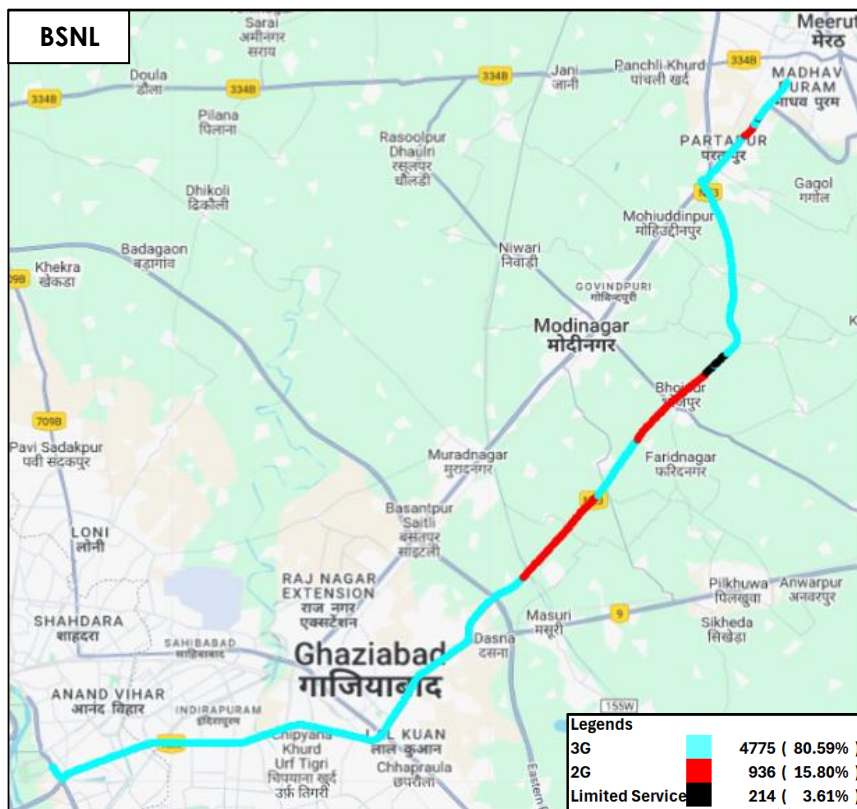


**Figure-28:** Serving technology plots 3G/2G network mode – BSNL.

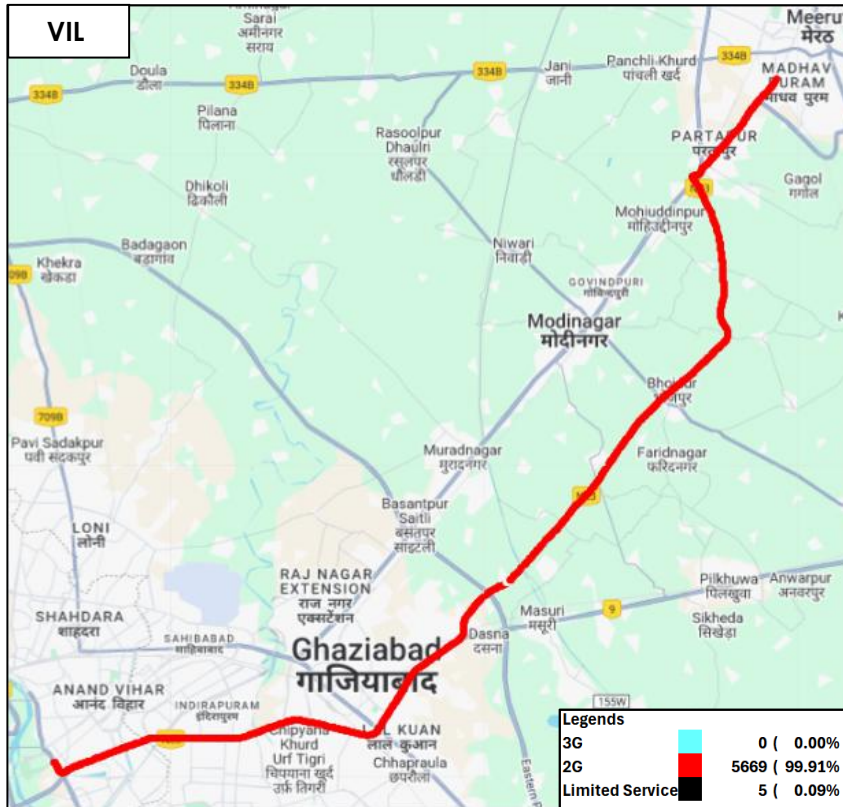

**Figure-29:** Serving technology plots 3G/2G network mode –VIL.

**(c) Network Signal Strength distribution:** The following chart represents signal strength distribution for 3G/2G network mode only. (refer figure-48, 49 & 50 for map view)

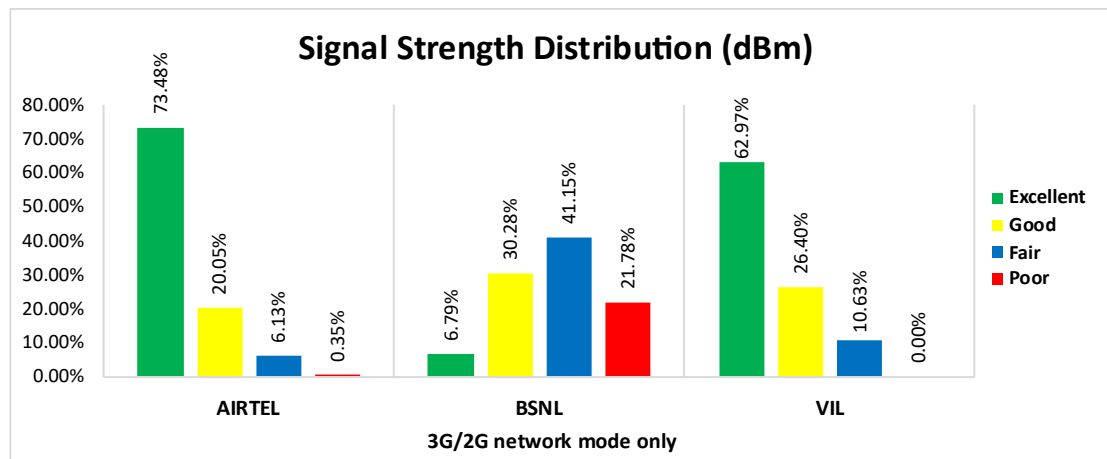

**Figure-30:** Signal strength distribution 3G/2G network mode only.


**Observations:**

- Airtel has 73% of samples falling in the excellent signal strength category.
- BSNL has 7% of samples falling in the excellent signal strength category.
- VIL has 63% of samples falling in the excellent signal strength category.


**(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)**

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	30	47	32	36
Call Setup Success Rate %	93.33	65.96	100.00	83.33
Drop Call Rate %	3.57	29.03	0.00	0.00
Call Setup Time Average (Second)	22.87	4.89	1.38	1.60
Handover Success Rate %	99.75	99.51	100.00	99.69

**Table-52:** Summary of voice call performance in network auto-selection mode.

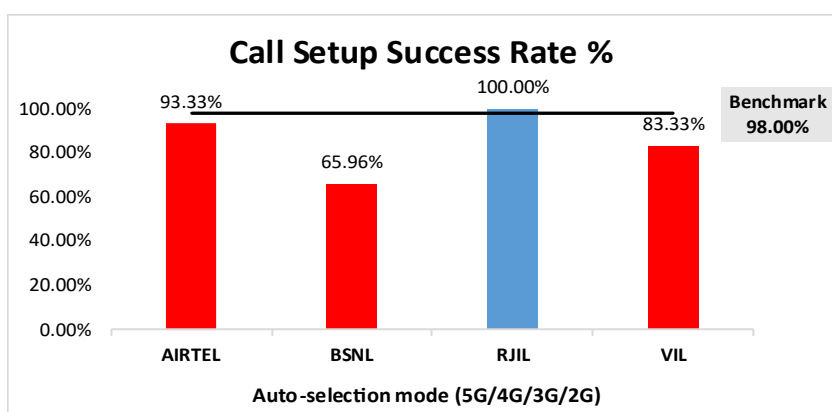

**Figure-31:** Performance for call setup success rate.

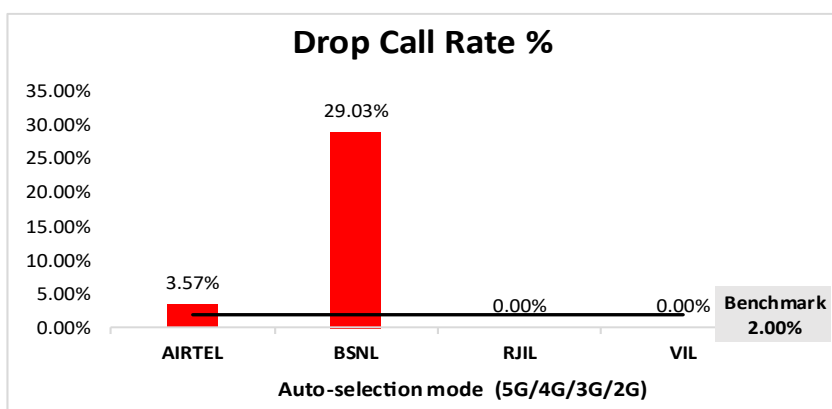

**Figure-32:** Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	26	41	25	26
Number of silence call for >4 Sec	0	3	2	3
Silence Call Rate %	0.00	7.32	8.00	11.54
Number of silence instances for >4 Sec	0	3	2	4
Number of silence instances for >3 Sec	1	6	2	5
Number of silence instances for >2 sec	3	14	9	11
RTP Jitter (4G & 5G) in ms	3.49	16.56	8.32	16.26
Packet loss Rate Downlink %	0.79	12.5	0.66	1.83
Packet loss Rate Uplink %	0.57	12.26	1.12	1.16


**Table-53:** Summary of silence instances & packet loss rate for mobile-to-mobile call.

#### (e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-53	252	314	319	309
Speech Quality (Average MOS)	3.94	2.38	3.79	4.37
Number of samples with MOS >=4 to <5 (Excellent)	198	24	208	266
Number of samples with MOS >=3 to <4 (Good)	43	49	77	30
Number of samples with MOS >=2 to <3 (Fair)	4	131	20	3
Number of samples with MOS >=1 to <2 (Poor)	7	110	14	10
%age of samples with MOS >=4 to <5 (Excellent)	78.57%	7.64%	65.20%	86.08%
%age of samples with MOS >=3 to <4 (Good)	17.06%	15.61%	24.14%	9.71%
%age of samples with MOS >=2 to <3 (Fair)	1.59%	41.72%	6.27%	0.97%
%age of samples with MOS >=1 to <2 (Poor)	2.78%	35.03%	4.39%	3.24%

**Table-54:** Summary of speech quality (MOS) samples.

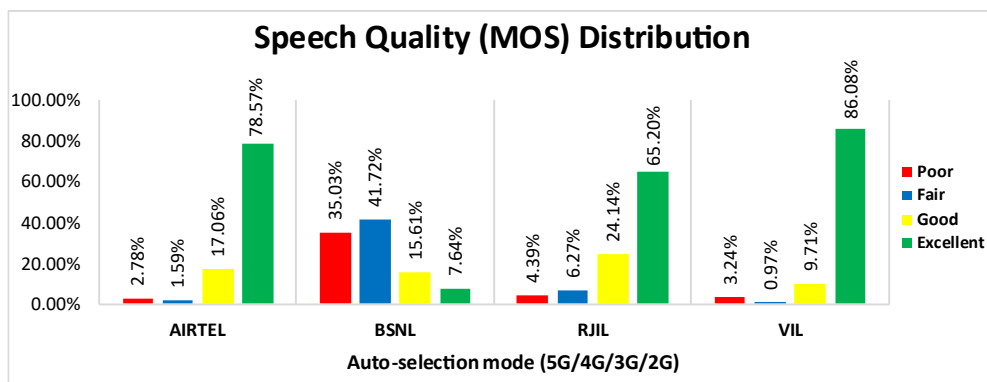

**Figure-33:** Distribution of samples in MOS range.


**(f) Network Technology:** This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	1.60%	NA	10.56%	NA
4G	97.94%	37.85%	89.44%	99.26%
3G	NA	37.16%	NA	NA
2G	0.46%	24.82%	NA	0.00%
Limited Service	0.00%	0.16%	0.00%	0.74%

**Table-55:** Time spent on technology during drive test.


**Note-**

- NA- Service provider doesn't provide services in respective technology.

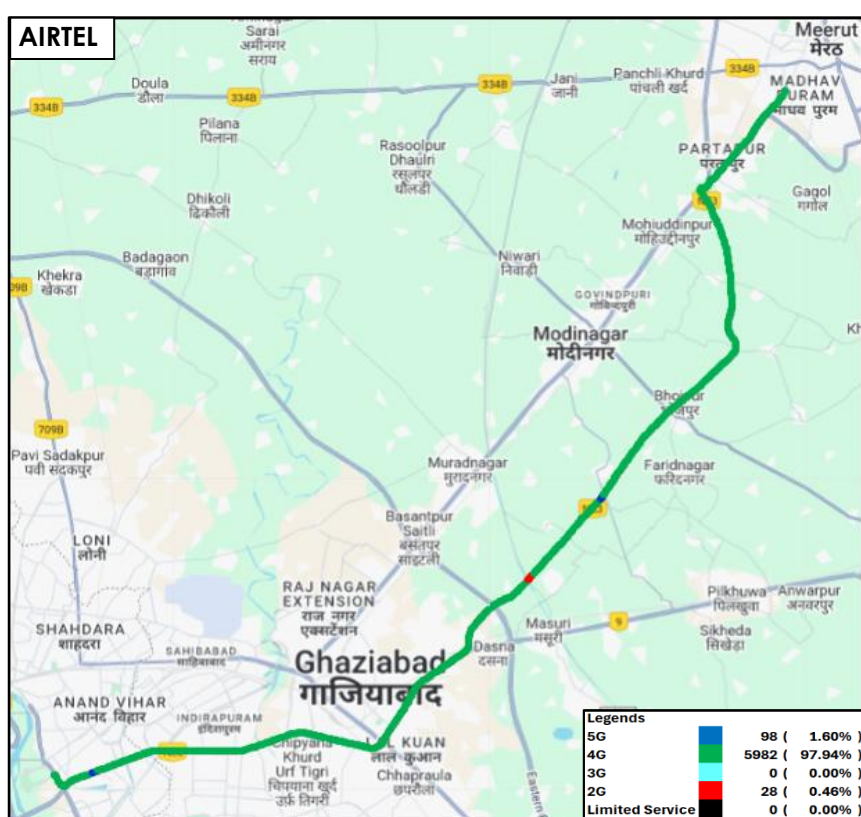


**Figure-34:** Serving technology plots in auto-selection mode (5G/4G/3G/2G) –AIRTEL.




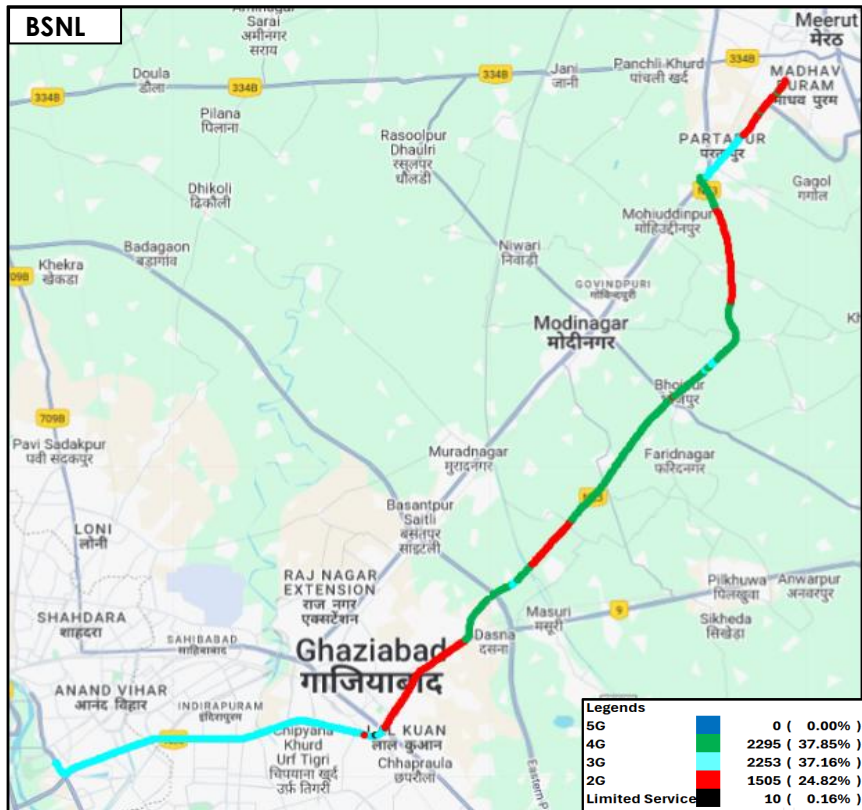

**Figure-35:** Serving technology plots in auto-selection mode (5G/4G/3G/2G) –BSNL.

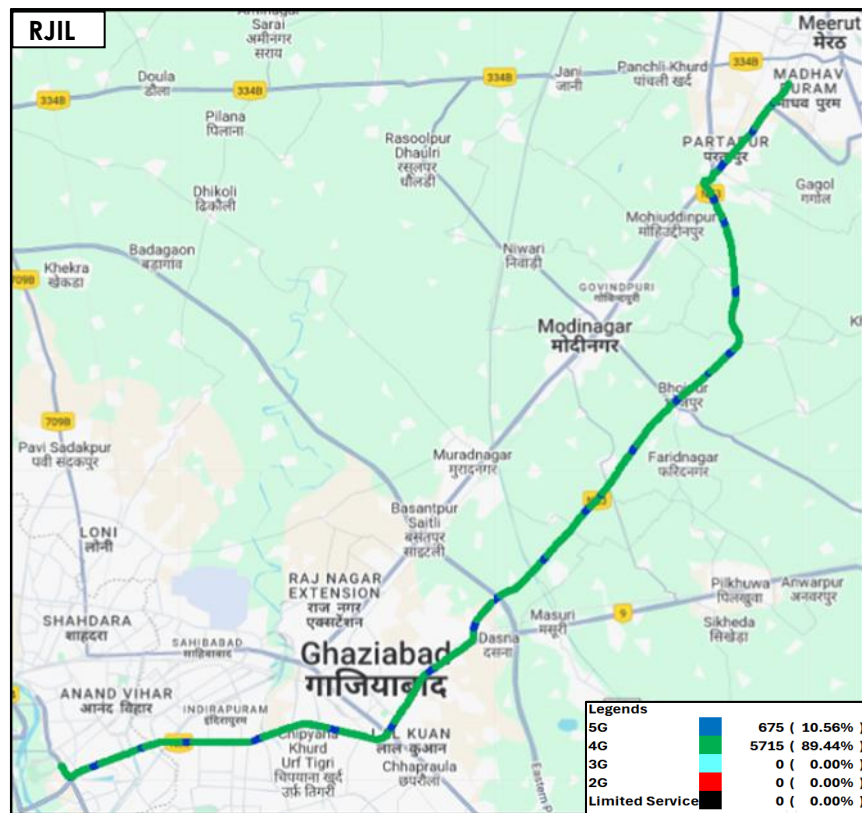


**Figure-36:** Serving technology plots in auto-selection (5G/4G/3G/2G)- RJIL.

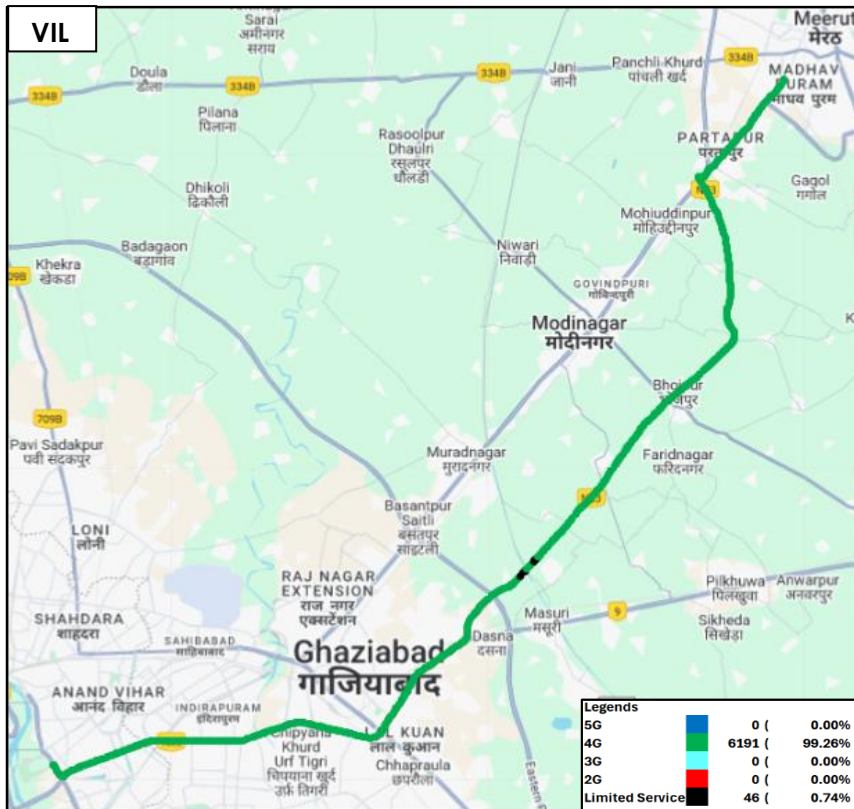

**Figure-37:** Serving technology plots in auto-selection mode (5G/4G/3G/2G) – VIL.

**(g) Network Signal Strength distribution:** The following chart provide signal strength distribution for auto-selection mode (5G/4G/3G/2G). (refer figure-51, 52, 53 & 54 for map view)

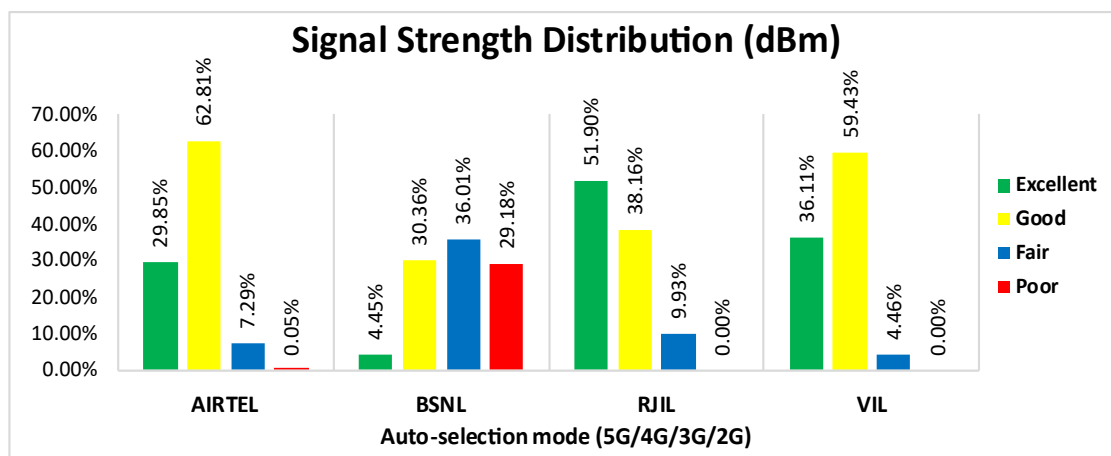

**Figure-38:** Signal strength distribution auto-selection mode 5G/4G/3G/2G.

#### Observations:

- Airtel has 30% of samples falling in the excellent signal strength category.
- BSNL has 4% of samples falling in the excellent signal strength category.
- RJIL has 52% of samples falling in the excellent signal strength category.
- VIL has 36% of samples falling in the excellent signal strength category.




#### 4.4.4 Data performance


##### (a)Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	141.32	2.15	129.15	29.45
	80th Percentile	206.80	3.42	218.67	44.32
	20th Percentile	68.45	0.76	37.31	12.12
Upload Throughput (Mbits/s)	Average	30.26	2.18	21.88	9.40
	80th Percentile	49.16	2.70	34.19	13.89
	20th Percentile	12.43	1.23	9.37	3.59
Latency (ms)	50th Percentile	19.73	38.25	18.40	32.50

**Table-56:** Summary of Data performance in network auto-selection mode.

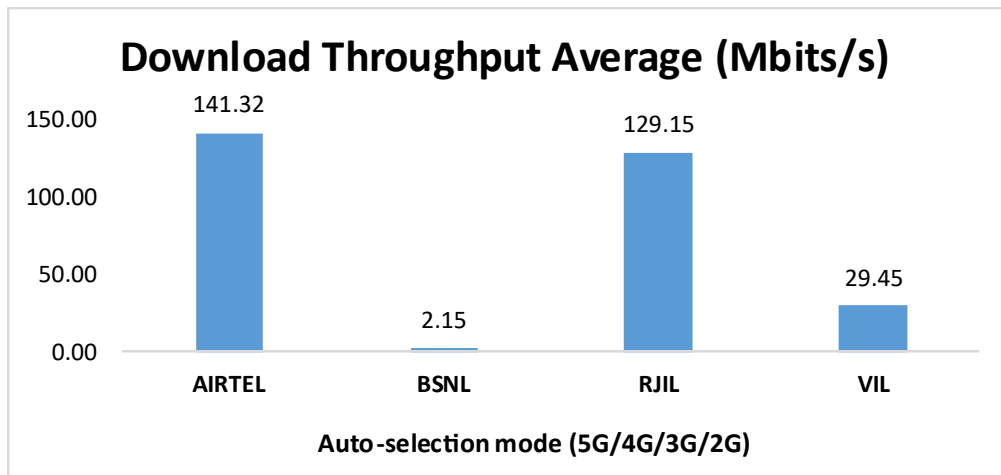

**Figure-39:** Download throughput.

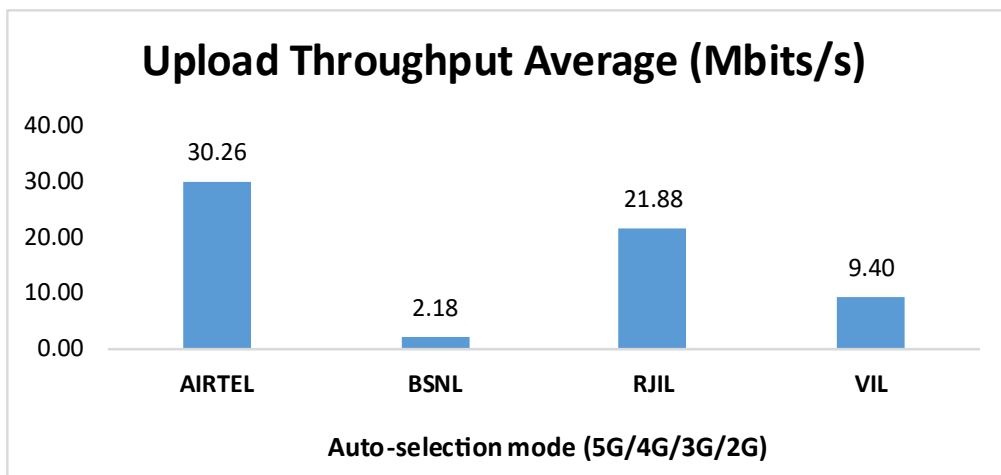

**Figure-40:** Upload throughput.

## 5. Voice & Data Key findings

### 5.1 Overall Voice

#### 1. Call Setup Success Rate:

- a) Airtel, BSNL and VIL have 35.61%, 92.34% and 98.56% call setup success rate respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL have 86.39%, 86.57%, 100.00% and 89.59% call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- c) Airtel & BSNL have 100.00% call setup success rate while calling on peer service provider's network, while RJIL & VIL have block call rate for inter-operator calls. (refer table-9)

#### 2. Call Setup Time:

- a) Airtel, BSNL and VIL call setup time is 12.79, 3.63 & 4.79 seconds respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL & VIL call setup time is 22.86, 3.03, 0.72 & 0.95 seconds respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

#### 3. Drop Call Rate:

- a) Airtel, BSNL and VIL drop call rate is 1.75%, 2.57% & 0.73% respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL drop call rate is 0.23%, 3.45%, 0.00% & 0.20% respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

#### 4. Call Silence/Mute Rate:

In packet switched network (4G/5G), BSNL, VIL, RJIL and Airtel have 4.35%, 2.23%, 1.43 & 0.48% silence call rate respectively. Further BSNL has higher RTP packet loss rate in downlink (8.12%) compared to VIL (0.81%), Airtel (0.36%) & RJIL (0.26%). In uplink the RTP packet loss rate is higher for BSNL (8.18%) compared to VIL (0.99%), RJIL (0.52%) & Airtel (0.19%). (refer table-6)

### 5.2 Overall Data

#### 1. Data download and upload performance (Overall i.e. LSA):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 143.86 Mbps, 4.06 Mbps, 246.47 Mbps and 49.68 Mbps respectively. (refer table-11)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 28.40 Mbps, 4.12 Mbps, 34.08 Mbps and 14.58 Mbps respectively. (refer table-11)

#### 2. Data download and upload performance (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 73.12 Mbps, 3.55 Mbps, 186.69 Mbps and 37.18 Mbps respectively. (refer table-30)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 19.42 Mbps, 5.07 Mbps, 28.01 Mbps and 10.36 Mbps respectively. (refer table-30)

#### 3. Data session setup success rate (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL have 100.00%, 95.56%, 100.00% and 82.22% download session setup success rate respectively. (refer table-30)
- b) Airtel, BSNL, RJIL and VIL have 100.00%, 91.11%, 100.00% and 95.56% upload session setup success rate respectively. (refer table-30)

## 5.3 Operator wise Key Findings

### 1. Airtel:

#### Voice

- 35.61% call setup success rate and 1.75% drop call rate have been observed in 3G/2G network mode for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-3)
- 86.39% call setup success rate and 0.23% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-5)
- 37.52% call setup success rate and 1.40% drop call rate have been observed in 3G/2G network mode for city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-13)
- 84.50% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-15)
- 92.22% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-20)
- 20.00% call setup success rate and 7.14% drop call rate have been observed for 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-50)
- 93.33% call setup success rate and 3.57% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-52)

#### Data

- Airtel has average download speed of 143.86 Mbps and average upload speed of 28.40 Mbps for LSA. (refer table-11)
- Airtel has average download speed of 150.59 Mbps and average upload speed of 28.99 Mbps across the measured routes for city drive. (refer table -19)
- Chaudhary Charan Singh University, District and Sessions Court-Meerut, IIMT University, PVS Mall, SDS Global Super Speciality Hospital and St. Francis World School have less download speed (less than 100 Mbps) out of total 9 Hotspots for auto-selection mode (5G/4G/3G/2G). (refer table-31, 32, 33, 37, 38 & 39)
- Chaudhary Charan Singh University, District and Sessions Court- Meerut, IIMT University, Meerut Railway Station, Meerut Roadways Bus Stand and St. Francis World School has less Upload speed (less than 20 Mbps) out of total 9 Hotspots in auto-selection mode (5G/4G/3G/2G). (refer table-31, 32, 33, 35, 36 & 39)
- Airtel has average download speed of 141.32 Mbps and average upload speed of 30.26 Mbps across measured routes for highway drive. (refer table-56)

## **2. BSNL:**

### **Voice**

- 92.34% call setup success rate and 2.57% drop call rate have been observed in 3G/2G network mode for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 86.57% call setup success rate and 3.45% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 94.04% call setup success rate and 1.69% drop call rate have been observed in 3G/2G network mode for city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-13)
- 87.05% call setup success rate and 2.37% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 94.44% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-20)
- 73.33% call setup success rate and 15.15% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-50)
- 65.96% call setup success rate and 29.03% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-52)

### **Data**

- BSNL has average download speed of 4.06 Mbps and average upload speed of 4.12 Mbps for LSA. (refer table-11)
- BSNL has average download speed of 4.32 Mbps and average upload speed of 4.27 Mbps across measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 10 Mbps) in auto-selection mode (5G/4G/3G/2G) (refer table-31, 32, 33, 34, 35, 36, 37, 38 & 39)
- Chaudhary Charan Singh University and Meerut Roadways Bus Stand has less upload speed (less than 2 Mbps) out of total 9 hotspots in auto-selection mode (5G/4G/3G/2G). (refer table-31 & 36)
- BSNL has average download speed of 2.15 Mbps and average upload speed of 2.18 Mbps across measured routes for highway drive. (refer table-56)

## **3. RJIL:**

### **Voice**

- 100.00% call setup success rate and 0.00% drop call rate have been observed in the auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)

- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-52)

#### **Data**

- RJIL has average download speed of 246.47 Mbps and average upload speed of 34.08 Mbps for LSA. (refer table-11)
- RJIL has average download speed of 267.14 Mbps and average upload speed of 36.28 Mbps across measured routes for city drive. (refer table-19)
- Chaudhary Charan Singh University, Meerut Roadways Bus Stand, SDS Global Super Speciality Hospital and St. Francis World School have less download speed (less than 100 Mbps) out of total 9 hotspots for auto-selection mode (5G/4G/3G/2G). (refer table-31, 36, 38 & 39)
- Chaudhary Charan Singh University, Meerut Railway Station, Meerut Roadways Bus Stand, SDS Global Super Speciality Hospital and St. Francis World School has less upload speed (less than 20 Mbps) out of total 9 hotspot for auto-selection mode (5G/4G/3G/2G). (refer table-31, 35, 36, 38 & 39)
- RJIL has average download speed of 129.15 Mbps and average upload speed of 21.88 Mbps across measured routes for highway drive. (refer table-56)

#### **4. VIL:**

##### **Voice**

- 98.56% call setup success rate and 0.73% drop call rate have been observed in 3G/2G network mode for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 89.59% call setup success rate and 0.20% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-5)
- 98.96% call setup success rate and 0.79% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 87.98% call setup success rate and 0.26% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 93.55% call setup success rate and 0.00% drop call rate have been observed for 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-50)

- 83.33% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-52)


#### **Data**

- VIL has average download speed of 49.68 Mbps and average upload speed of 14.58 Mbps for LSA. (refer table-11)
- VIL has average download speed of 53.28 Mbps and average upload speed of 15.64 Mbps across measured routes for city drive. (refer table-19)
- Meerut Railway Station and St. Francis World School have less download speed (less than 10 Mbps) out of total 9 hotspots in auto-selection mode (5G/4G/3G/2G). (refer table-35 & 39)
- Meerut Railway Station has less upload speed (less than 2 Mbps) out of total 9 hotspots in auto-selection mode (5G/4G/3G/2G). (refer table-35)
- VIL has average download speed of 29.45 Mbps and average upload speed of 9.40 Mbps across measured routes for highway drive. (refer table-56)


## 6. Annexure

### 6.1 Route wise coverage map

#### 6.1.1 City

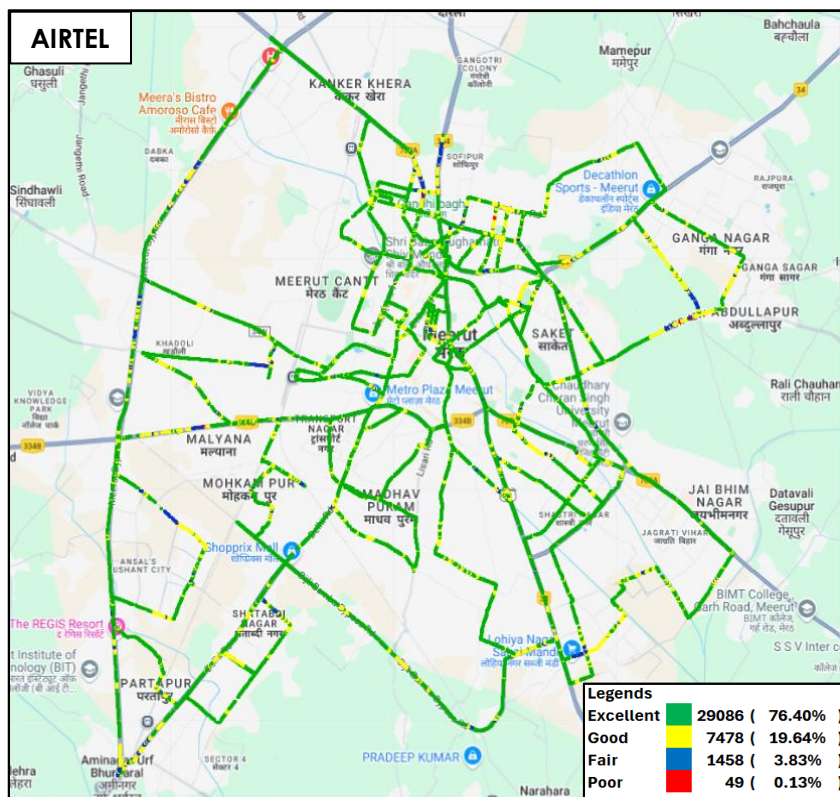


**Figure-41:** Signal strength 3G/2G network mode – AIRTEL.

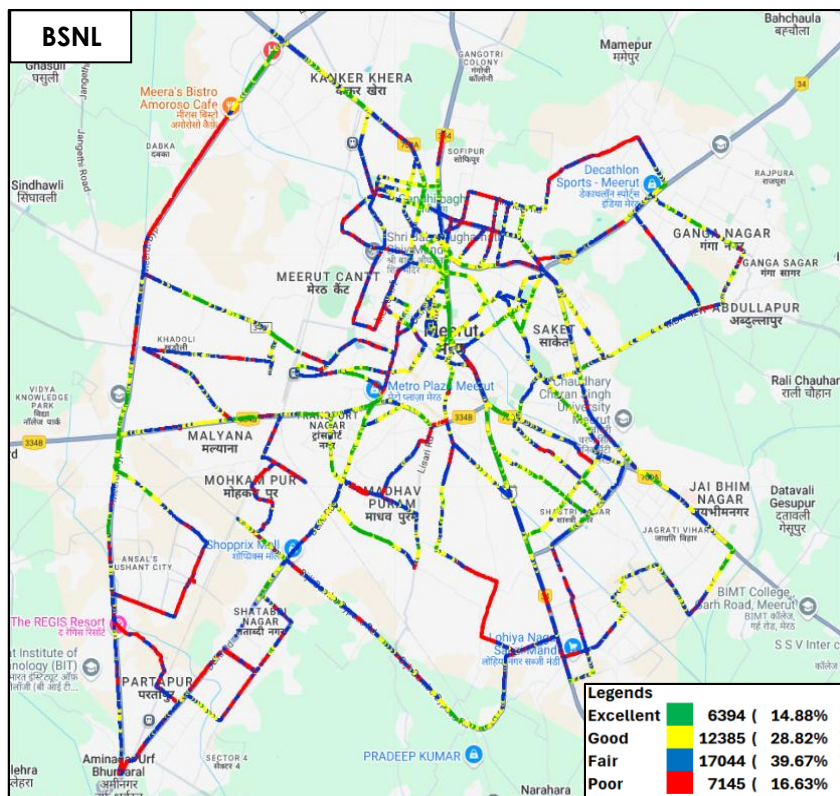


**Figure-42:** Signal strength 3G/2G network mode – BSNL.



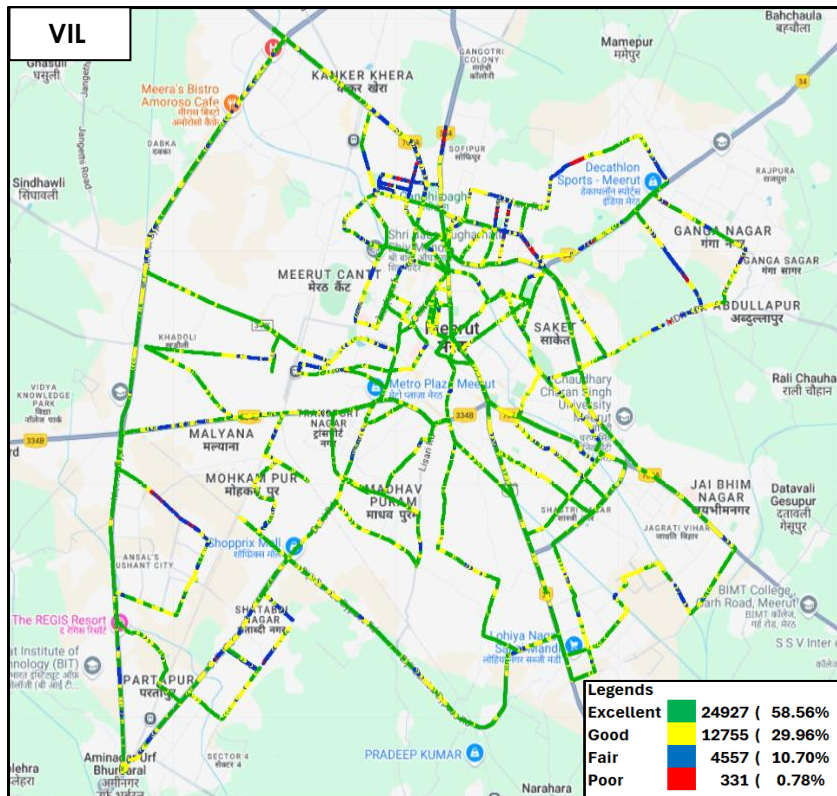


**Figure-43:** Signal strength 3G/2G network mode – VIL.

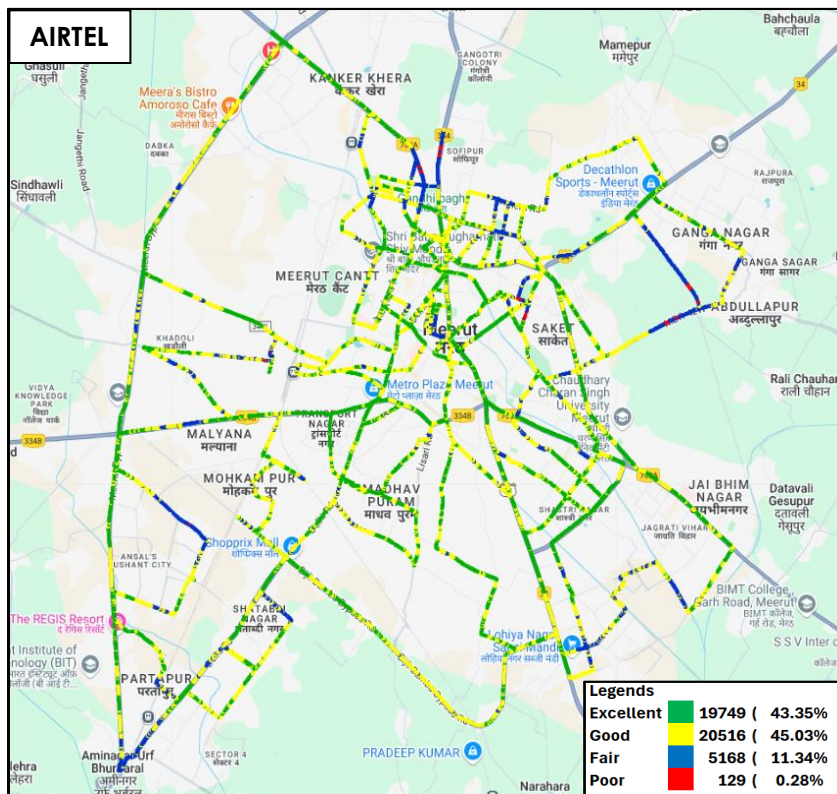


**Figure-44:** Signal strength auto-selection mode 5G/4G/3G/2G – AIRTEL.




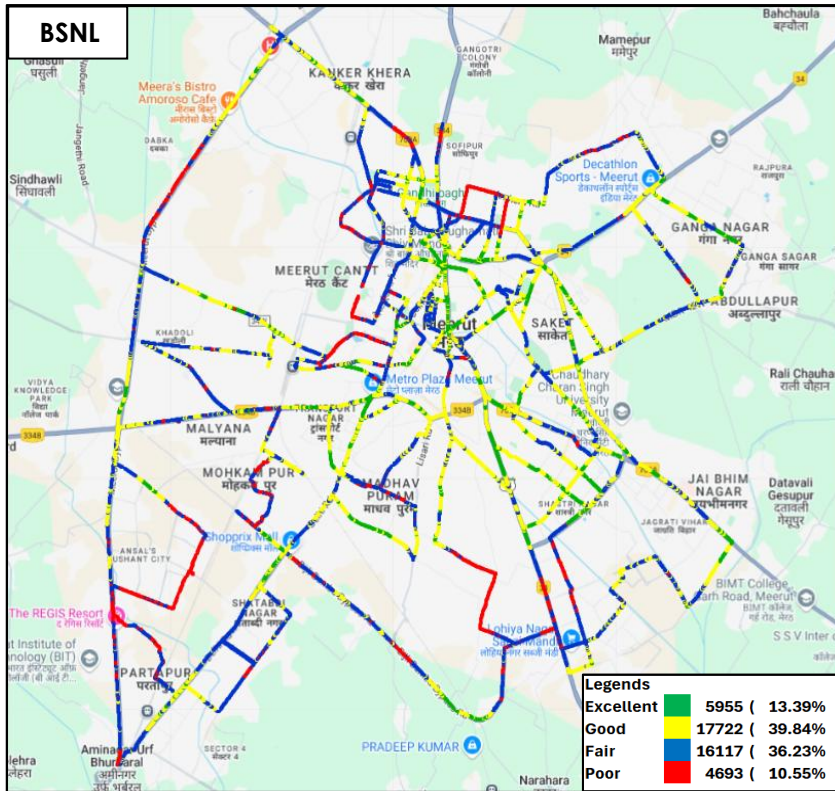

**Figure-45:** Signal strength auto-selection mode 5G/4G/3G/2G – BSNL.

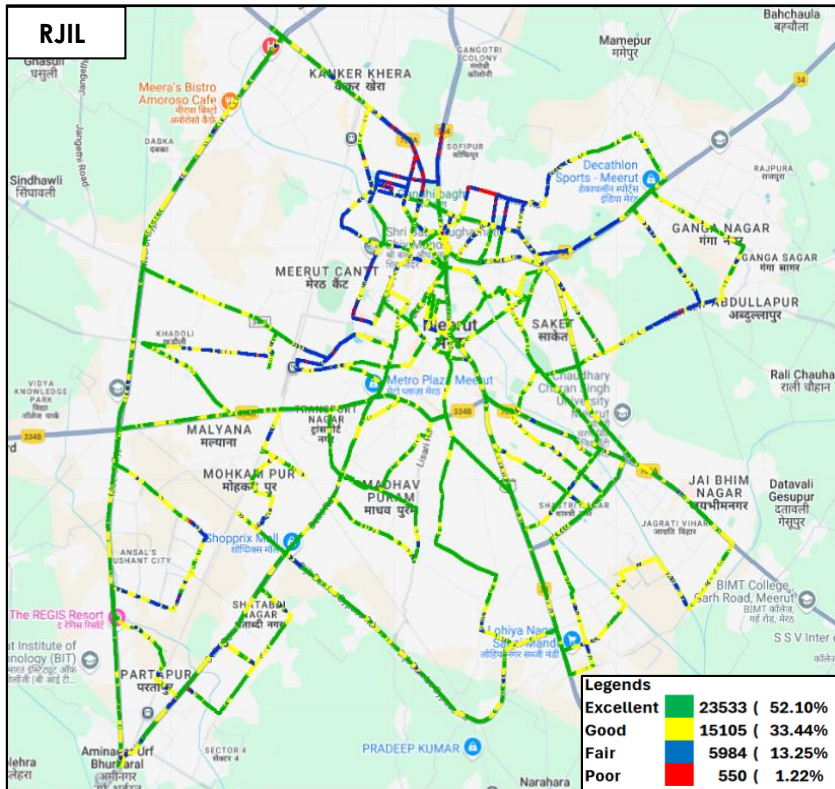


**Figure-46:** Signal strength auto-selection mode 5G/4G/3G/2G – RJIL.

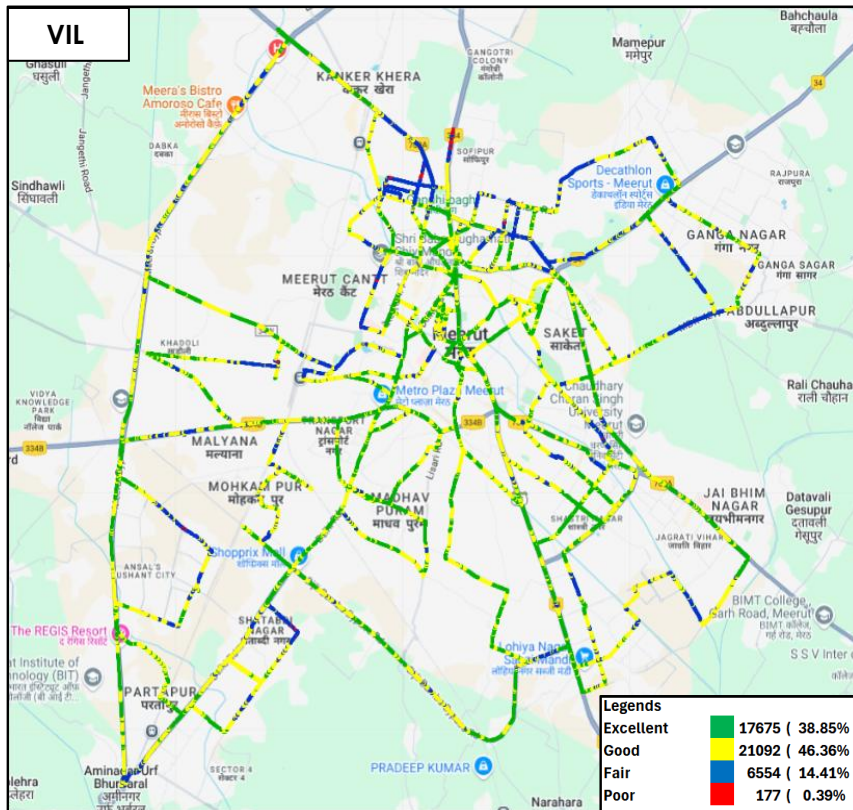

**Figure-47:** Signal strength auto-selection mode 5G/4G/3G/2G – VIL.


## 6.1.2 Highway

### i) Delhi to Meerut

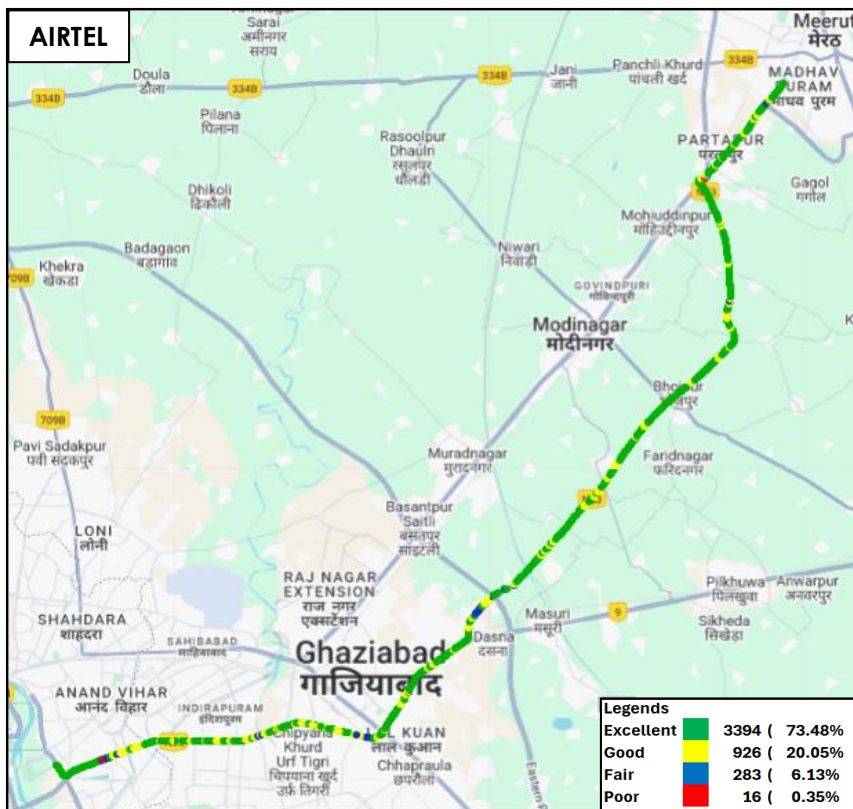


**Figure-48:** Signal strength 3G/2G network mode – AIRTEL.




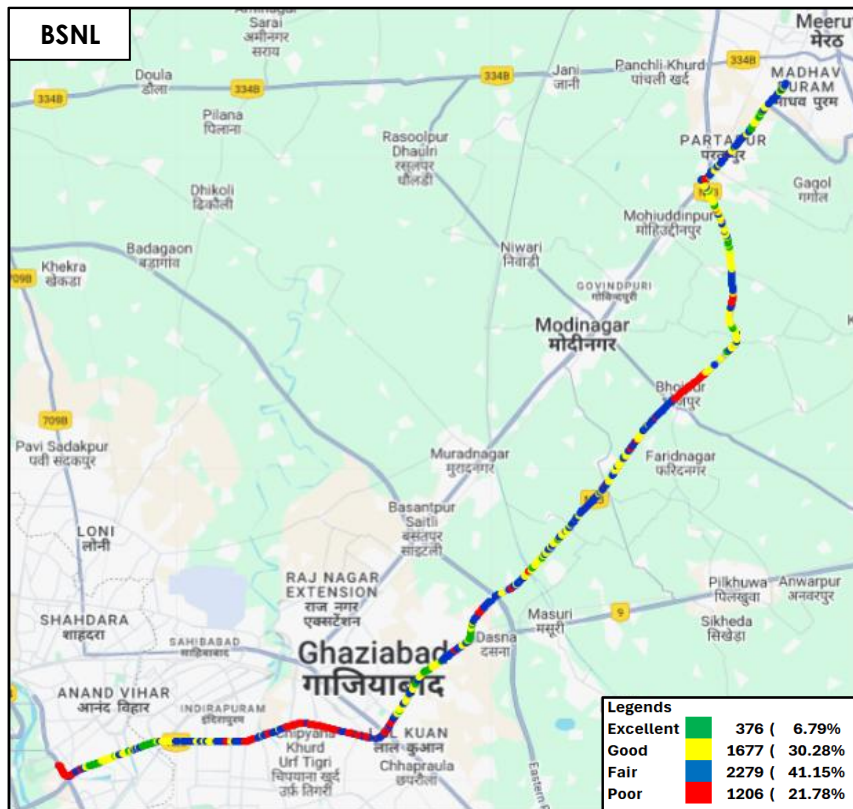


**Figure-49:** Signal strength 3G/2G network mode – BSNL.

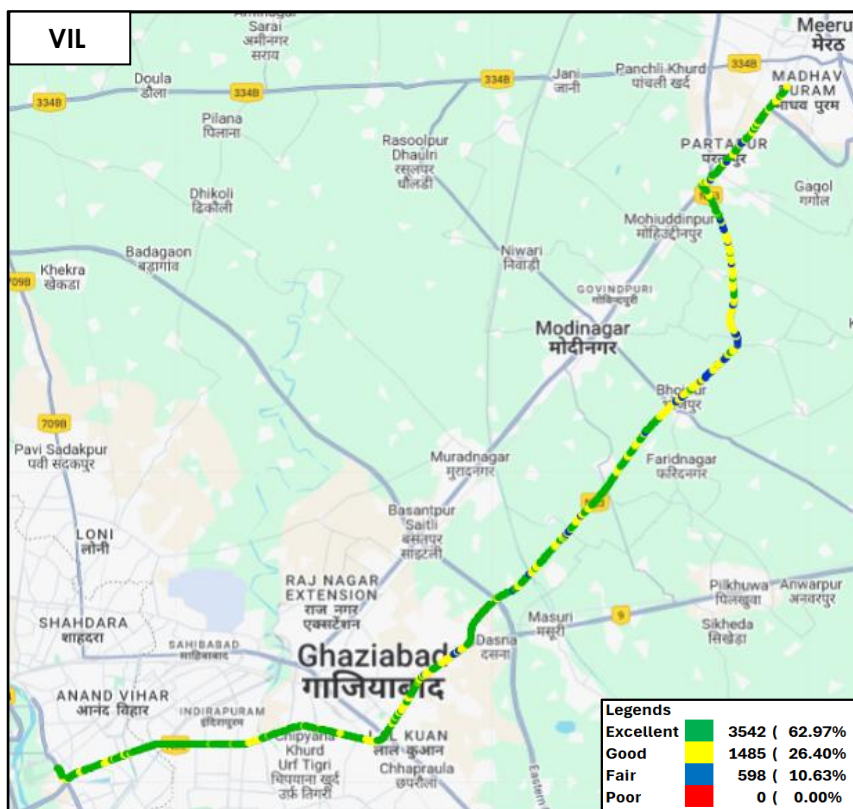

**Figure-50:** Signal strength 3G/2G network mode – VIL.

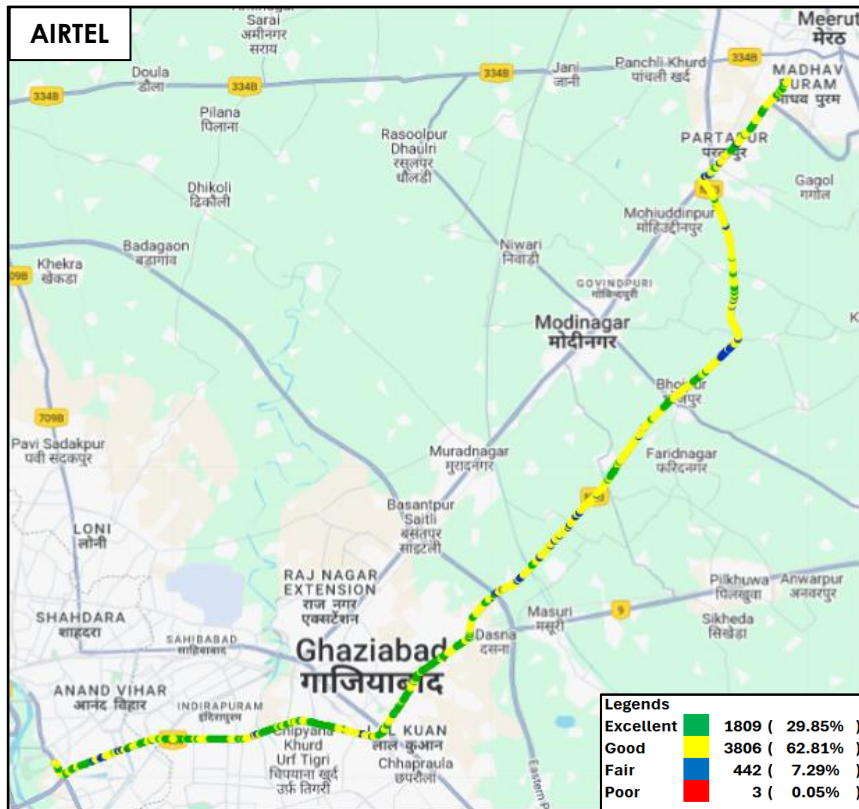


**Figure-51:** Signal strength auto-selection mode 5G/4G/3G/2G – AIRTEL.

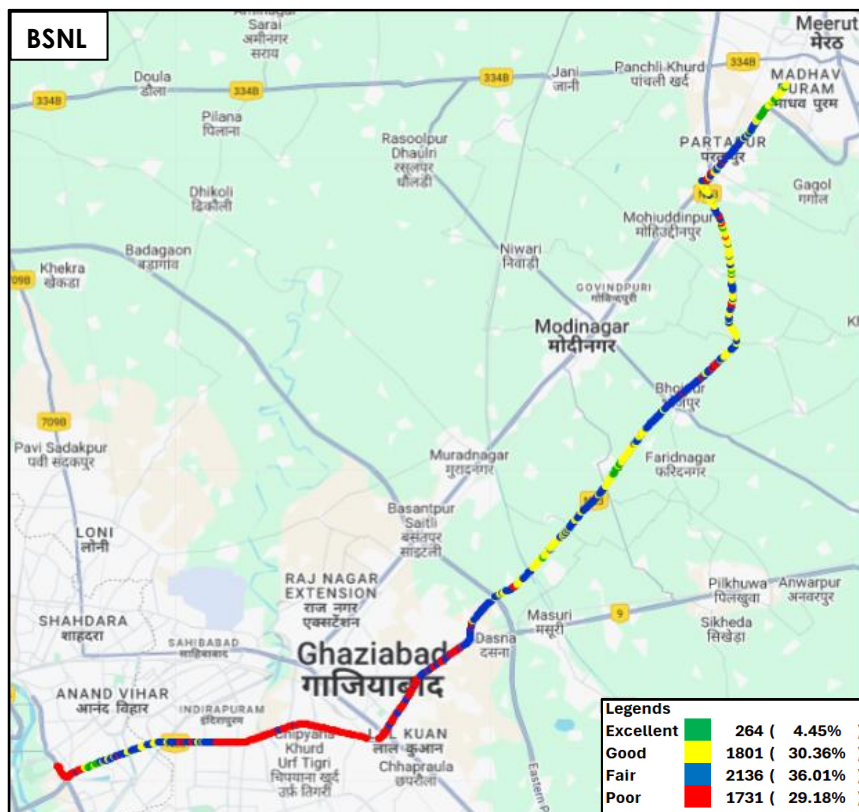


**Figure-52:** Signal strength auto-selection mode 5G/4G/3G/2G – BSNL.



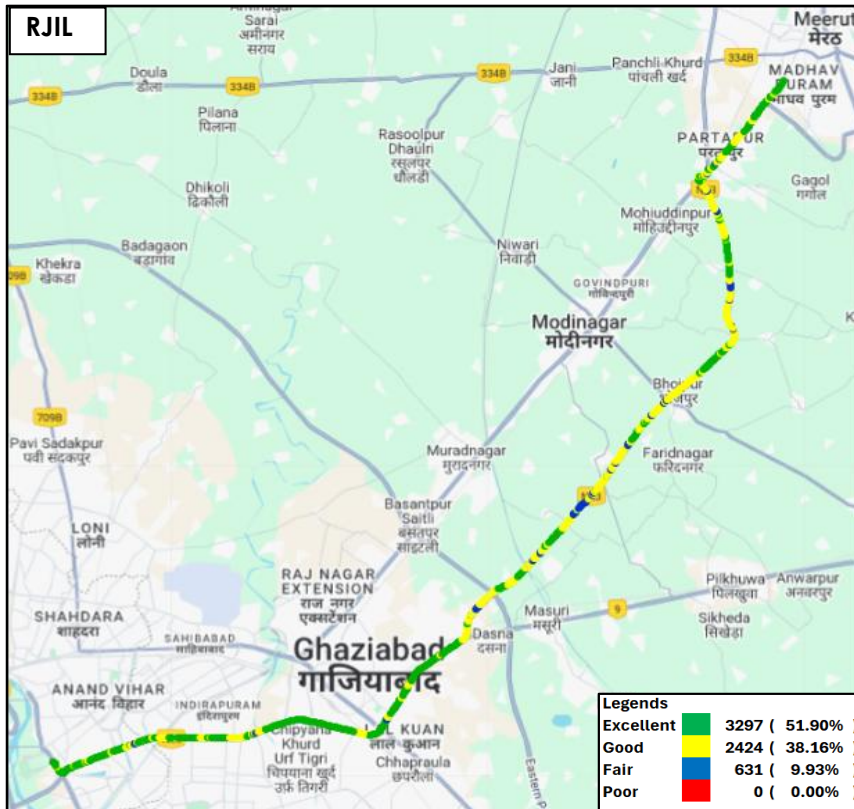

**Figure-53:** Signal strength auto-selection mode 5G/4G/3G/2G – RJIL.

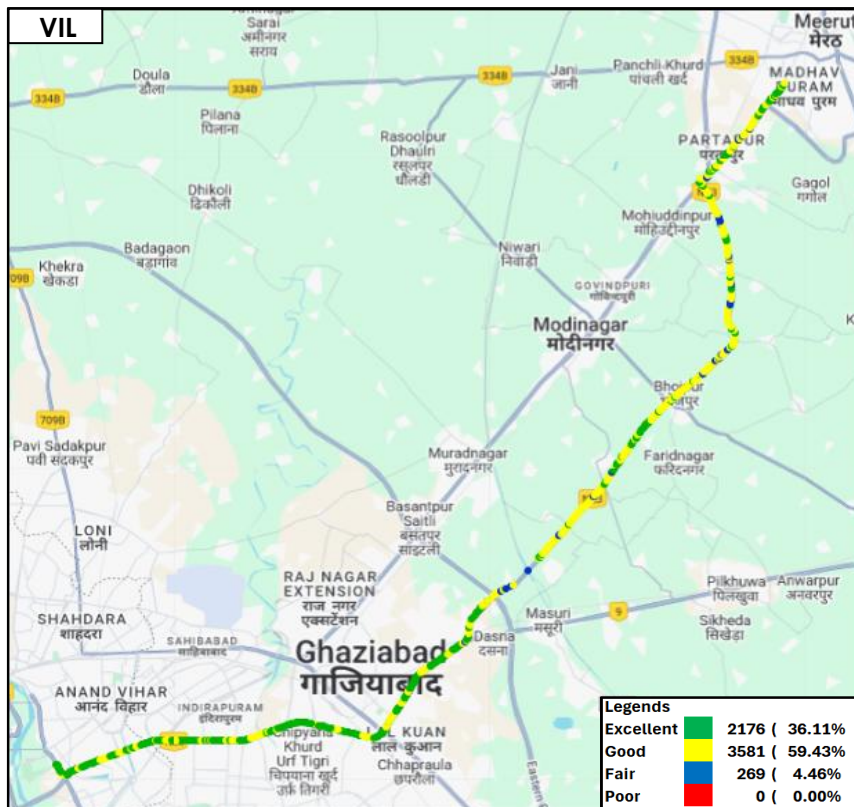

**Figure-54:** Signal strength auto-selection mode 5G/4G/3G/2G – VIL.

## 7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions may be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

### 7.1 Appendix-I

#### 7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	<ul style="list-style-type: none"> <li>• 3G/2G auto mode- switch Call</li> <li>• 5G/4G/3G/2G auto mode- switch Call</li> <li>• 5G/4G MOS Call</li> </ul>	30 Sec
Call Duration		90 Sec/ 180 Sec
Wait/ Guard Time		15 Sec

**Table-57:** Voice test detail

**Note-**

- There is 15 sec wait time after locking and before starting first call in 3G/2G call.
- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.
- Speech quality (MOS) has been measured only in city drive & highway by making Mobile to Mobile call.
- 180 Sec calls were made only in highway & railway route drive.


Data Test		
Test Type	Technology	Detail
HTTP/FTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
HTTP/FTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)
Web Browsing		3 popular websites ( <a href="http://www.google.co.in">www.google.co.in</a> , <a href="http://www.ircct.co.in">www.ircct.co.in</a> , <a href="http://www.sbi.co.in">www.sbi.co.in</a> ) 20 sec timeout (only at Hotspot)

Latency		25 count- Dynamic 1000 count- Hotspot Payload- 42 bytes in all drive
---------	--	--

**Table-58:** Data test detail

**Note-**

- 5 Data iteration to be done at each hotspot location.
- Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance.
- Ping test to be performed only once at hotspot location.
- Youtube & Web browsing test to be performed at static location only.
- All values are taken up to two decimal places with round off.
- Download and upload testing has been done on FTP server for Airtel, BSNL & RJIL. (Airtel, BSNL & RJIL not provided HTTP server)
- VIL download and upload testing is done on HTTP Server.

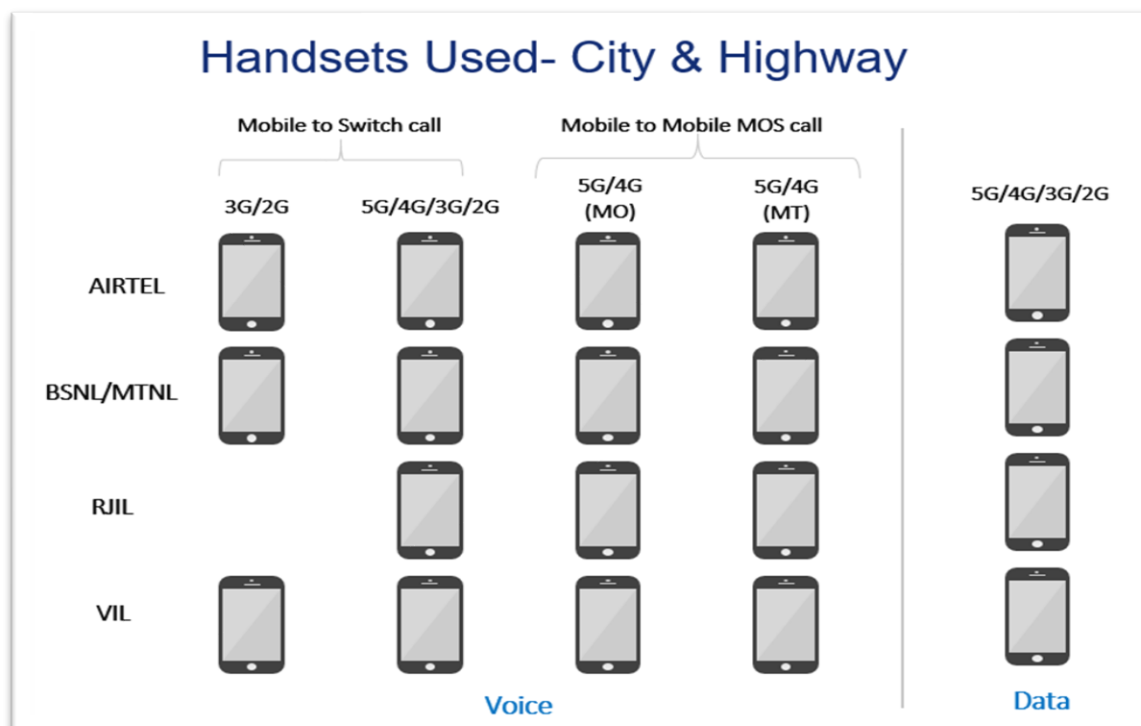


**Figure-55:** Number of handsets used in city & highway drive

MO: Mobile originating

MT: Mobile terminating

## Handsets Used- Railway/Metro/Walk Test/ Hotspot & Coastal Area

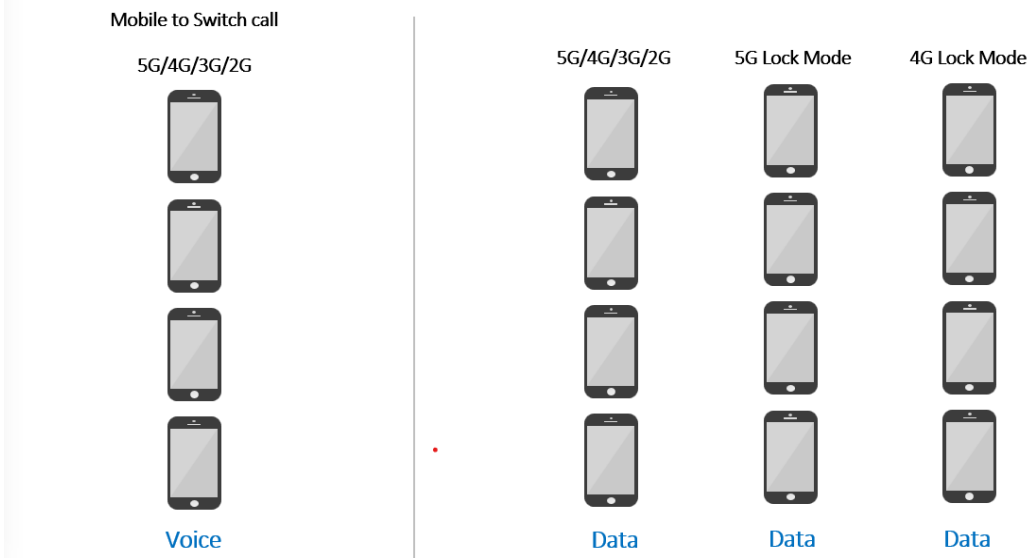


**Figure-56:** Number of handsets used in railway/metro/walktest/hotspot & coastal area

**Note-** 5G & 4G Lock mode testing has been performed at hotspot locations only.

### 7.1.2 Drive test Methodology

#### (a) Dynamic voice testing (on the move)

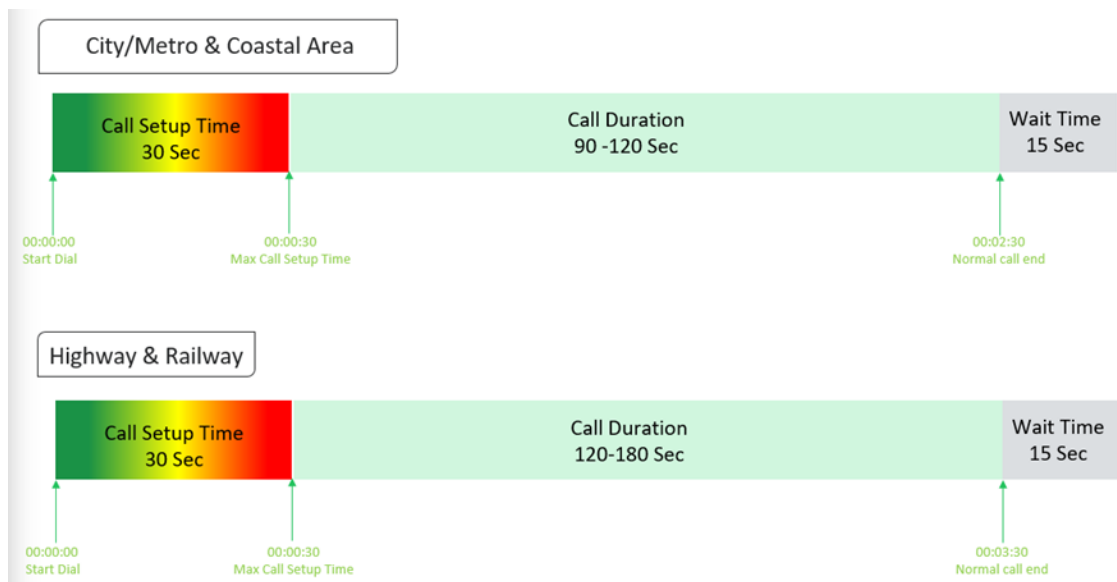

**Figure-57:** Voice test script for city/railway/metro/highway & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.
- Speech quality (MOS) will be measured only City & Highway drive by making Mobile to Mobile calls.




## (b) Hotspot voice testing



**Figure-58:** Voice test script for walktest/hotspot


- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.

## (c) Dynamic Data (internet) test

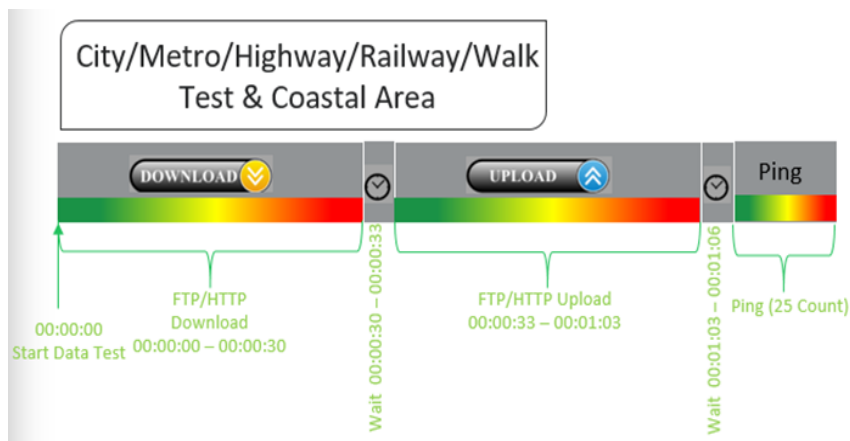

**Figure-59:** Data test script used in city/metro/railway/highway/walk test & coastal area

## (d) Static Data(internet) testing

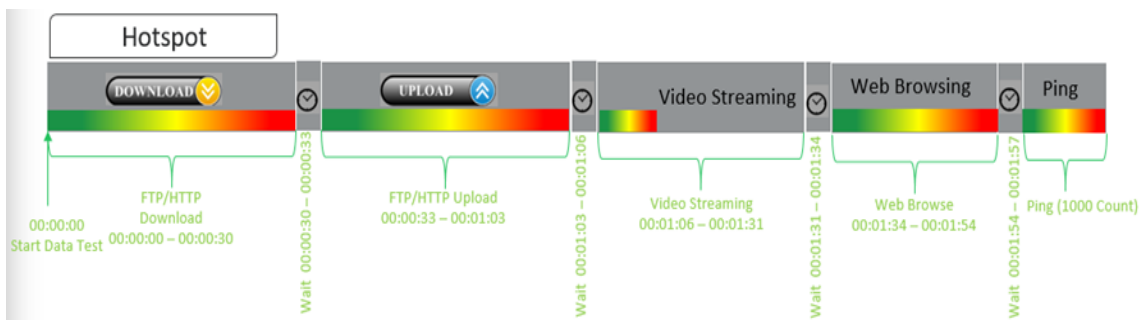

**Figure-37:** Data test script used at hotspot

- 5 Data iteration done at each hotspot location.
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- Only 1 ping iteration (with 1000 Count) done at the hotspot location.

## 7.2 Appendix-II

### 7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
Call Setup Success Rate	<p>(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup:</p> <ul style="list-style-type: none"> <li>(a) Call attempt is made</li> <li>(b) The signaling channel is allocated</li> <li>(c) The call is routed to the outwards path of the terminating network</li> <li>(d) An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement.</li> </ul> <p>CSSR = (Total Call Established/ Total Call Attempt) *100</p> <p>As per QoS Regulation 2024 benchmark value is <b>&gt;=98%</b></p>
Drop Call Rate	<p>Drop call represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network</p> <p>Drop Call Rate = (Total Drop Call/Total Call Established) *100</p> <p>As per QoS Regulation 2024 benchmark value is <b>&lt;=2%</b></p>
Call Setup Time	<p>Time taken from call initiate to call alerting/ringing.</p> <p>Call Setup Time = T2- T1</p> <p>T2- Ringing (VoLTE/VoNR) &amp; Alerting (for WCDMA &amp; GSM), T1- Invite (VoLTE/VoNR) &amp; CM Service Request (for WCDMA &amp; GSM)</p>
Voice Quality (MOS)	<p>Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as:</p> <p>Excellent: MOS <math>\geq 4</math> and <math>&lt; 5</math>            Good : MOS <math>\geq 3</math> and <math>&lt; 4</math>            Fair : MOS <math>\geq 2</math> and <math>&lt; 3</math>            Poor : MOS <math>\geq 1</math> and <math>&lt; 2</math></p>
Handover Success Rate	<p>Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100</p> <p>Handover type which are considered- 2G Inter &amp; Intra cell, 3G Soft &amp; IRAT, 4G Inter &amp; Intra frequency &amp; SRVCC, 5G Inter &amp; Intra frequency &amp; 5G to 4G handovers.</p>
Silence Call	<p>A call which has <math>\geq 4</math> sec continuous RTP gap is considered as a Silence Call.</p> <p>Silence call rate = (count of silence call / Total calls established) *100</p> <p>If a call observes multiple silence count <math>\geq 4</math> sec in a particular established call it has been taken as one silent event.</p>

Jitter	<p>The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If <math>S_i</math> is the RTP timestamp from packet <math>i</math>, and <math>R_i</math> is the time of arrival in RTP timestamps units for packet <math>i</math>, then for two packets <math>i</math> and <math>j</math> the inter-arrival jitter <math>D</math> can be expressed as:</p> $D(i,j) = (R_j - R_i) - (S_j - S_i)$ <p>The interarrival jitter is calculated continuously as each data packet <math>i</math> is received from source <math>SSRC\_n</math>, using this difference <math>D</math> for that packet and the previous packet <math>i-1</math> in order of arrival (not necessarily in sequence), according to the formula</p> $J(i) = J(i-1) + ( D(i-1,i)  - J(i-1))/16 \text{ or } 8$																																		
Downlink Packet Drop Rate	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset.</p> <p>This KPI is calculated from MOS call for packet call only (VoNR/VoLTE)</p>																																		
Uplink Packet Drop Rate	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).</p>																																		
Signal Strength	<p>Signal strength is the signal power level received by the wireless user.</p> <table><tr><th rowspan="2">Parameter Name</th><th rowspan="2">Technology</th><th colspan="4">Signal Strength (dBm)</th></tr><tr><th>Excellent</th><th>Good</th><th>Fair</th><th>Poor</th></tr><tr><td>Rx Level</td><td>GSM</td><td>0 to <math>\geq -65</math></td><td><math>&lt; -65</math> to <math>\geq -75</math></td><td><math>&lt; -75</math> to <math>\geq -85</math></td><td><math>&lt; -85</math> to min</td></tr><tr><td>RSCP</td><td>WCDMA</td><td>0 to <math>\geq -70</math></td><td><math>&lt; -70</math> to <math>\geq -80</math></td><td><math>&lt; -80</math> to <math>\geq -90</math></td><td><math>&lt; -90</math> to min</td></tr><tr><td>RSRP</td><td>LTE</td><td>0 to <math>\geq -80</math></td><td><math>&lt; -80</math> to <math>\geq -95</math></td><td><math>&lt; -95</math> to <math>\geq -110</math></td><td><math>&lt; -110</math> to min</td></tr><tr><td>SS_RSRP</td><td>NR</td><td>0 to <math>\geq -80</math></td><td><math>&lt; -80</math> to <math>\geq -95</math></td><td><math>&lt; -95</math> to <math>\geq -110</math></td><td><math>&lt; -110</math> to min</td></tr></table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to $\geq -65$	$< -65$ to $\geq -75$	$< -75$ to $\geq -85$	$< -85$ to min	RSCP	WCDMA	0 to $\geq -70$	$< -70$ to $\geq -80$	$< -80$ to $\geq -90$	$< -90$ to min	RSRP	LTE	0 to $\geq -80$	$< -80$ to $\geq -95$	$< -95$ to $\geq -110$	$< -110$ to min	SS_RSRP	NR	0 to $\geq -80$	$< -80$ to $\geq -95$	$< -95$ to $\geq -110$	$< -110$ to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to $\geq -65$	$< -65$ to $\geq -75$	$< -75$ to $\geq -85$	$< -85$ to min																														
RSCP	WCDMA	0 to $\geq -70$	$< -70$ to $\geq -80$	$< -80$ to $\geq -90$	$< -90$ to min																														
RSRP	LTE	0 to $\geq -80$	$< -80$ to $\geq -95$	$< -95$ to $\geq -110$	$< -110$ to min																														
SS_RSRP	NR	0 to $\geq -80$	$< -80$ to $\geq -95$	$< -95$ to $\geq -110$	$< -110$ to min																														

**Table-59:** Network performance parameter and definition voice

## 7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
<b>Download Speed (Mbps)</b>	<p>The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device.</p> <p>Download Speed = Total bytes transferred during download / Total time for transfer</p> <ul style="list-style-type: none"> <li>80th percentile (upper range) &amp; 20th percentile (lower range) value has been calculated for download speed in dynamic drive and Hotspot combine data</li> </ul>
<b>Upload Speed (Mbps)</b>	<p>The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server.</p> <p>Upload Speed = Total bytes transferred during upload / Total time for transfer.</p> <ul style="list-style-type: none"> <li>80th percentile (upper range) &amp; 20th percentile (lower range) value has been calculated for upload speed in dynamic drive and Hotspot combine data.</li> </ul>
<b>Download Session Setup Success Rate</b>	<p>(total download session established (successfully connected to server)/ total download session attempt) *100.</p> <p>This KPI has been calculated for Hotspot only.</p>

<b>Upload Session Setup Success Rate</b>	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
<b>Web Page Download Time</b>	<p>Web browsing test is used to measure performance in terms of opening a web/HTTP page.</p> <p>Time taken to open the web page successfully is considered as web browsing delay/web page download time.</p>
<b>Video Streaming Delay</b>	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
<b>Latency</b>	<p>Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again.</p> <p>The Latency is measured in milliseconds (ms).</p> <p>To calculate the one-way latency we just do half of the round-trip time. 50th percentile of one way latency has been reported.</p>
<b>Jitter</b>	<p>Measure of variation in time in arrival of packets from a source to destination</p> <p>The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL</p> <p><math>IPDV(i) = D(i) - D(i-1)</math> then Stdvs of IPDV is considered as jitter.</p>
<b>Packet Loss Rate</b>	<p>Number of packets lost out of total packet transferred during test.  <math>Packet\ loss\ rate = (Total\ packet\ lost / Total\ packet\ sent) * 100</math></p> <p>* Packet delay (using ping) &gt;90 ms considered as packet loss and included in packet loss rate.</p> <p>* Packet loss rate is calculated based on ICMP</p> <p>* 90th percentile for Packet loss rate has been reported in overall Hotspot performance summary.</p>

**Table-60:** Network performance parameter and definition Data

**Disclaimer:** The observations presented above and, in the reports, represent the performance of the service providers on the area/route under test on the day/time of conducting the drive test and no inference whatsoever may be drawn regarding the quality of the telecom service by the service providers in the whole city/state/licensed service area.