



TELECOM REGULATORY AUTHORITY OF INDIA

Independent Drive Test Report

Kerala LSA

October 2025

Contents

1. Introduction	3
2. Executive Summary (LSA)	3
2.1 Drive test details	3
2.2 Drive test routes	4
2.3 Summary of areas covered	4
2.4 Telecom service providers detected frequency bands	5
2.5 Performance against key QoS parameters	5
3. QoS performance analysis-LSA level	6
3.1 Overview	7
3.2 Voice performance	7
3.3 Data performance	10
4. Detailed QoS performance analysis	12
4.1 Overview	12
4.2 City	12
4.2.1 Drive test route	12
4.2.2 Areas covered	12
4.2.3 Voice performance	12
4.2.4 Data performance	20
4.3 Hotspots	22
4.3.1 Locations	22
4.3.2 Hotspot covered	22
4.3.3 Voice performance	22
4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)	24
4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)	27
4.4 Walk Test	30
4.4.1 Walk test locations	30
4.4.2 Walk Test Covered	30
4.4.3 Voice Performance	30
4.4.4 Data Performance	31
4.5 Highway	33
4.5.1 Drive test route	33
4.5.2 Routes Covered	33
4.5.3 Voice performance	33
4.5.4 Data performance	42

5. Voice & Data Key findings	43
5.1 Overall Voice.....	43
5.2 Overall Data	43
5.3 Operator wise Key Findings.....	44
6. Annexure	49
6.1 Route wise coverage map	49
6.1.1 City	49
6.1.2 Highway	52
7. Appendix	56
7.1 Appendix-I	56
7.1.1 Drive test setup	56
7.1.2 Drive test Methodology	58
7.2 Appendix-II	60
7.2.1 Network Performance Parameters for Voice calls	60
7.2.2 Network Performance Parameters Data tests	61

1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet the required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interests of the consumers of telecommunications services.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

2. Executive Summary (LSA)

2.1 Drive test details

This report covers the findings of the IDT undertaken in Kerala License Service Area (LSA) during the month of October-2025 under the supervision of TRAI Regional Office (RO) Bengaluru. Details of route / area covered during the IDT are as given below:

S. No	Drive test route	Type of route	Distance covered (KMs)	From date	To date
1	Wayanad	City	251.6	14-Oct-2025	14-Oct-2025
2	Wayanad	Inter Operator Calling	1 Location	16-Oct-2025	16-Oct-2025
3	Wayanad	Hotspot	8 Locations	15-Oct-2025	16-Oct-2025
4	Wayanad	Walk test	7.0	15-Oct-2025	16-Oct-2025
5	Kalpetta to Bangalore	Highway	265.3	17-Oct-2025	17-Oct-2025

Table-1: Drive test summary

2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, Inter-operator call test, hotspots, walk test and highway as per the legends shown on the map.

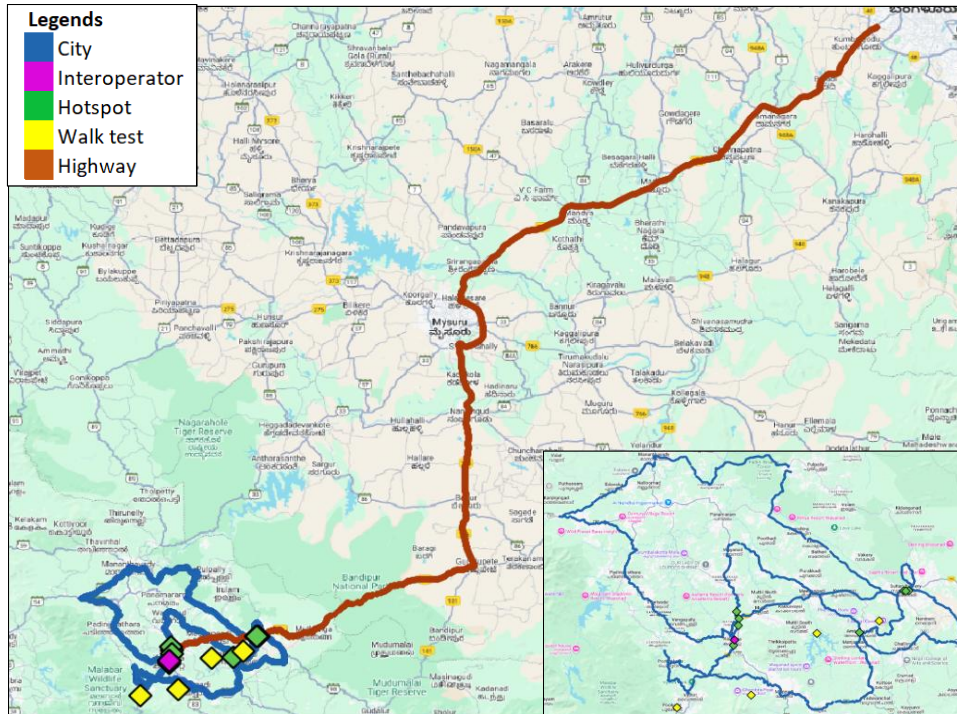


Figure-1: Drive test routes

2.3 Summary of areas covered

a) City-Pozhuthana, Padinjarathara, Thariyode, Vengapally, Edavaka, Mananthavady, Wayanad, Kenichira, Batheri, Sultan Bathery, Krishnagiri, Meenangadi, Muttill North, Ambalavayal, Manjapaara, Kalpetta and Meppadi etc.

b) Hotspot

1. Government General Hospital Kalpetta
2. Kalpetta New Bus Stand Near NH766
3. Puliarmala Jain Temple Ananthanatha Swami Temple Kalpetta
4. Sulthan Bathery Municipality office Sulthan Bathery
5. Sulthan Bathery Police Station Sulthan Bathery
6. Taluk Headquarters Hospital Sulthan Bathery
7. Wayanad District Collectorate Office Kalpetta
8. Wayanad Heritage Museum Ambalavayal

c) Walk Test

1. Chembra Peak
2. Edakkal Caves Trail Ambalavayal
3. Karapuzha Dam Walkway & Garden Area Kalpetta
4. Pookode Lake Eco-Path Lakkidi

d) Highway

Kalpetta to Bangalore passing through Muthanga, Gundlupete, Begur, Kadakola, Mysuru, Mandya, Channapatna, Basavanapura, Lakshmi and Kumbalgodu etc.

2.4 Telecom service providers detected frequency bands


Technologies covered during the IDT and frequency bands in use are summarised in table below:

S.no.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	900,1800
2	Bharti Airtel Ltd.	4G	900,1800,2100,2300
3	Bharti Airtel Ltd.	5G	3500
4	BSNL	2G	900
5	BSNL	3G	2100
6	BSNL	4G	700,2100,2500
7	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
8	Reliance JIO Infocomm Ltd.	5G	700,3500
9	Vodafone Idea Ltd.	2G	900,1800
10	Vodafone Idea Ltd.	4G	900,1800,2100,2300,2500

Table-2: Telecom service provider (TSP) covered in IDT

2.5 Performance against key QoS parameters

CSSR: Call Setup Success Rate (in %), **CST:** Call Setup Time (in seconds), **DCR:** Drop Call Rate (in %) & **MOS:** Mean Opinion Score.

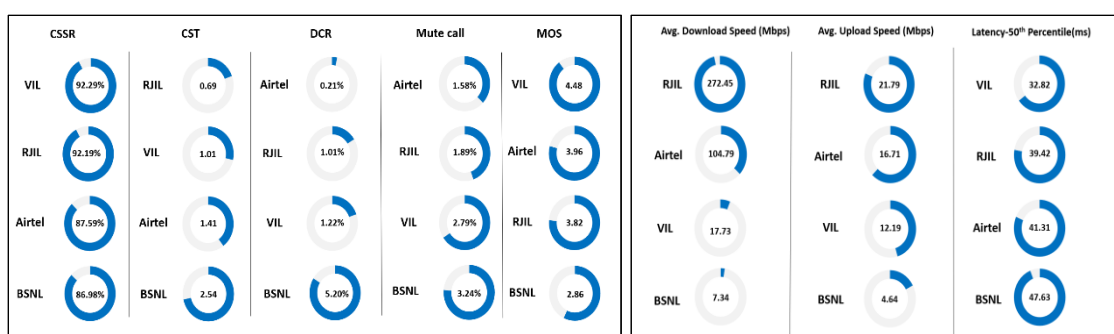

Summary-Voice services

Call Setup Success Rate: Airtel, BSNL, RJIL and VIL have 87.59%, 86.98%, 92.19% and 92.29% call setup success rate respectively in Auto-selection mode (5G/4G/3G/2G).

Call Setup Time: Airtel, BSNL, RJIL and VIL have call setup time of 1.41, 2.54, 0.69 and 1.01 seconds respectively in Auto-selection mode (5G/4G/3G/2G).

Drop Call Rate: Airtel, BSNL, RJIL and VIL have drop call rate of 0.21%, 5.20%, 1.01% and 1.22% respectively in Auto-selection mode (5G/4G/3G/2G).

Call Silence/Mute Rate: Airtel, BSNL, RJIL and VIL have silence call rate of 1.58%, 3.24%, 1.89% and 2.79% respectively in packet switched network (4G/5G).

Mean Opinion Score (MOS): Airtel, BSNL, RJIL and VIL have average MOS of 3.96, 2.86, 3.82 and 4.48 respectively.

Summary-Data services

Data Download performance (Overall):

Average download speed of Airtel (5G/4G/2G) is 104.79 Mbps, BSNL (4G/3G/2G) is 7.34 Mbps, RJIL (5G/4G) is 272.45 Mbps and VIL (4G/2G) is 17.73 Mbps.

Data Upload performance (Overall):

Average upload speed of Airtel (5G/4G/2G) is 16.71 Mbps, BSNL (4G/3G/2G) is 4.64 Mbps, RJIL (5G/4G) is 21.79 Mbps and VIL (4G/2G) is 12.19 Mbps.

Latency (Overall): Airtel, BSNL, RJIL and VIL 50th percentile latency is 41.31 ms, 47.63 ms, 39.42 ms, 32.82ms respectively.

Data performance - Hotspots (in Mbps):

Airtel- 4G D/L: 39.71 4G U/L: 4.39
 5G D/L: 199.06 5G U/L: 34.38
 BSNL- 4G D/L: 13.46 4G U/L: 10.27
 RJIL- 4G D/L: 56.78 4G U/L: 12.42
 5G D/L: 278.78 5G U/L: 15.60
 VIL- 4G D/L: 14.54 4G U/L: 12.34

Note- "D/L" Download speed, "U/L" Upload speed

QoS Performance Analysis- Kerala LSA

3. QoS performance analysis-LSA level

3.1 Overview

This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the Kerala LSA during the month of October-2025 covering city drive, hotspots, walk test and highway drive. (Refer Table 1)

3.2 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	341	353	347
Call Setup Success Rate %	94.72	90.93	93.37
Drop Call Rate %	1.55	4.36	2.78
Call Setup Time-Average (Second)	4.26	4.50	3.77
Handover Success Rate %	98.66	98.98	97.46

Table-3: Summary of voice call performance in 3G/2G network mode only.

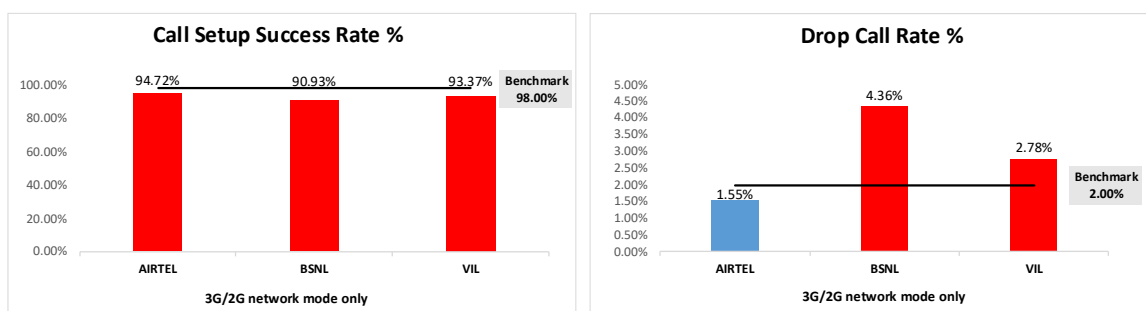


Figure-2: Call setup success rate and drop call rate performance.

Number of unique cell Id's covered in Voice test- Technology wise			
Technology	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
3G	NA	91	NA
2G	559	259	524

Table-4: Technology wise number of network cell Id's latched during drive test.

Note-

- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.

(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	548	553	538	532
Call Setup Success Rate %	87.59	86.98	92.19	92.29
Drop Call Rate %	0.21	5.20	1.01	1.22
Call Setup Time-Average (Second)	1.41	2.54	0.69	1.01
Handover Success Rate %	99.69	97.98	99.42	99.66

Table-5: Summary of voice call performance in network auto-selection mode.

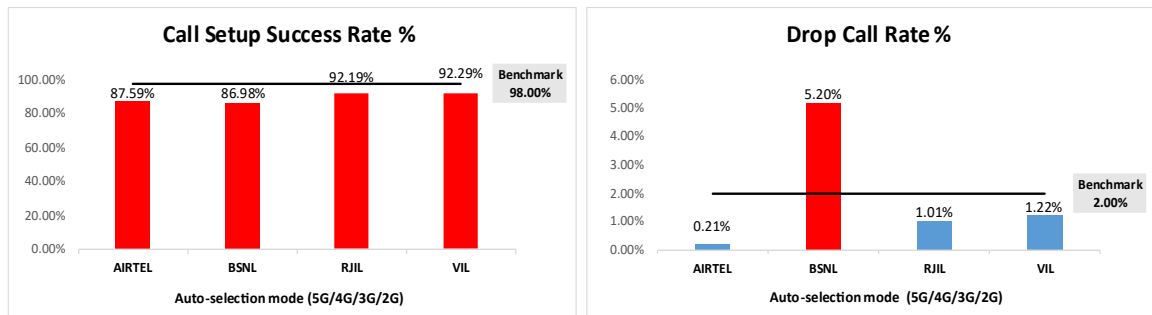


Figure-3: Performance for call setup success rate and drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	316	339	317	323
Number of silences call for >4 Sec	5	11	6	9
Silence Call Rate %	1.58	3.24	1.89	2.79
Number of silence instances for >4 Sec	5	14	7	15
Number of silence instances for >3 Sec	12	30	13	26
Number of silence instances for >2 sec	37	52	24	68
RTP Jitter (4G & 5G) in ms	4.47	7.36	11.48	17.98
Packet loss Rate Downlink %	0.83	5.36	1.09	1.34
Packet loss Rate Uplink %	0.76	5.34	1.06	0.75

Table-6: Summary of silence instances & packet loss rate for mobile to mobile calls.

Number of unique cell Id's covered in Voice test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	620	NA
4G	1109	337	794	970
3G	NA	37	NA	NA
2G	6	182	NA	38

Table-7: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

(c) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile-to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values mean: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls table-6	2256	1788	2231	2154
Speech Quality (Average MOS)	3.96	2.86	3.82	4.48
Number of samples with MOS ≥ 4 to < 5 (Excellent)	1843	469	1450	1886
Number of samples with MOS ≥ 3 to < 4 (Good)	310	328	607	186
Number of samples with MOS ≥ 2 to < 3 (Fair)	37	577	99	39
Number of samples with MOS ≥ 1 to < 2 (Poor)	66	414	75	43
%age of samples with MOS ≥ 4 to < 5 (Excellent)	81.69%	26.23%	64.99%	87.56%
%age of samples with MOS ≥ 3 to < 4 (Good)	13.74%	18.34%	27.21%	8.64%
%age of samples with MOS ≥ 2 to < 3 (Fair)	1.64%	32.27%	4.44%	1.81%
%age of samples with MOS ≥ 1 to < 2 (Poor)	2.93%	23.15%	3.36%	2.00%

Table-8: Summary of speech quality (MOS) samples.

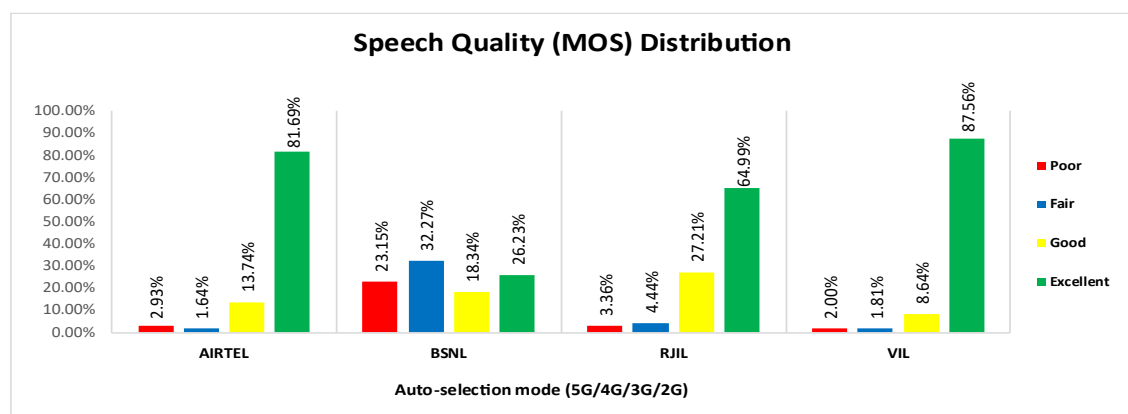


Figure- 4: Distribution of samples in MOS range.

(d) Inter-service provider voice call performance: To check the performance of inter-service providers call setup success rate, total 17 to 18 inter operator calls were attempted at one location which is Hotel Shri Deluxe Residency, Kalpetta. The call setup success rate and call setup time observation is as below.

Call Setup Success Rate %				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	100.00	100.00	100.00
BSNL	100.00	NA	100.00	100.00
RJIL	100.00	100.00	NA	100.00
VIL	100.00	100.00	100.00	NA

Table-9: Call setup success rate across service providers

Note-

- NA- Only inter-operator calls were measured during test.

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	2.33	1.07	1.72
BSNL	2.35	NA	1.76	2.05
RJIL	1.57	1.97	NA	1.38
VIL	1.89	2.10	1.51	NA

Table-10: Call setup time across service providers

Note-

- NA- Only inter-operator calls were measured during test.

3.3 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	104.79	7.34	272.45	17.73
	80th Percentile	196.04	10.27	483.62	29.25
	20th Percentile	22.31	1.42	54.76	7.19
Upload Throughput (Mbits/s)	Average	16.71	4.64	21.79	12.19
	80th Percentile	28.29	7.55	40.54	19.92
	20th Percentile	2.44	1.24	3.23	3.14
Latency (ms)	50th Percentile	41.31	47.63	39.42	32.82

Table-11: Summary of data performance in network auto-selection mode.

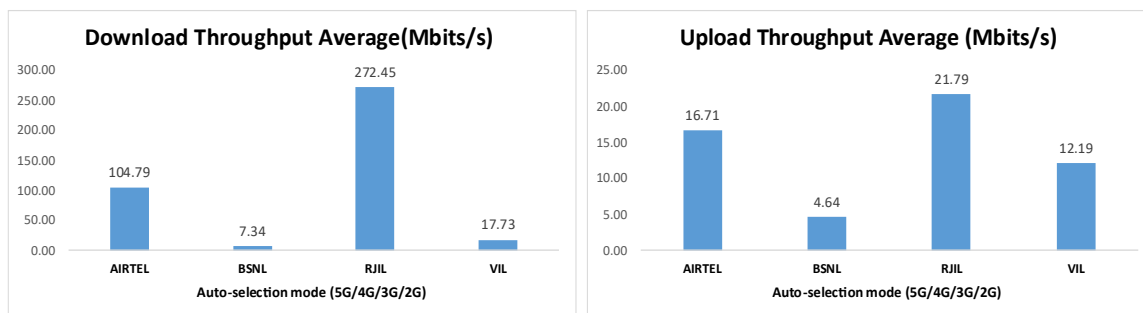


Figure- 5: Download and Upload throughput.

Number of unique cell Id's covered in Data test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	682	NA
4G	1139	422	339	994
3G	NA	69	NA	NA
2G	6	70	NA	31

Table-12: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

Detailed QoS Performance Analysis

4. Detailed QoS performance analysis

4.1 Overview

This section covers analysis on performance of various categories of drives like city, hotspots, walk test and highway for all telecom service providers, the results of drive tests conducted are shown individually for respective areas/locations.

4.2 City

Drive test has been conducted on 14th October 2025 in Wayanad city. (Refer Table-1)

4.2.1 Drive test route



Figure- 6: Drive test routes

4.2.2 Areas covered

Pozhuthana, Padinjarathara, Thariyode, Vengapally, Edavaka, Mananthavady, Wayanad, Kenichira, Batheri, Sultan Bathery, Krishnagiri, Meenangadi, Muttill North, Ambalavayal, Manjapaara, Kalpetta and Meppadi etc.

4.2.3 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	244	247	245
Call Setup Success Rate %	99.18	99.19	99.18
Drop Call Rate %	0.41	3.27	0.41
Call Setup Time-Average (Second)	4.21	4.18	3.56
Handover Success Rate %	98.43	98.95	98.06

Table-13: Summary of voice call performance in 3G/2G network mode only.

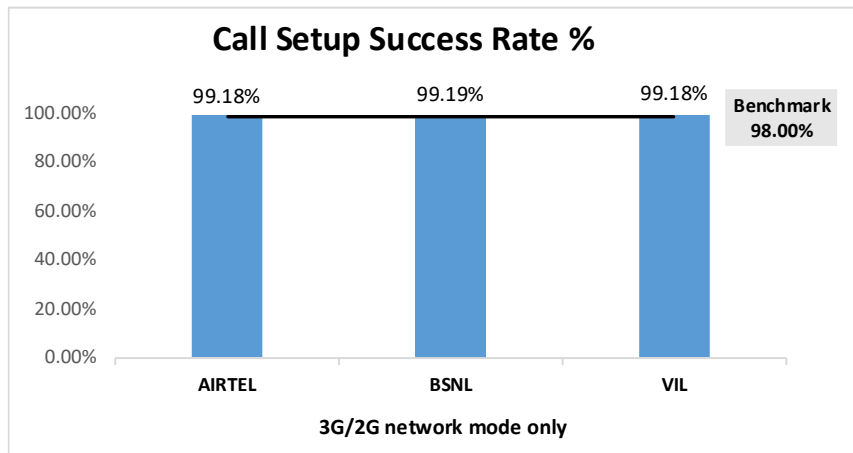


Figure-7: Performance for call setup success rate.

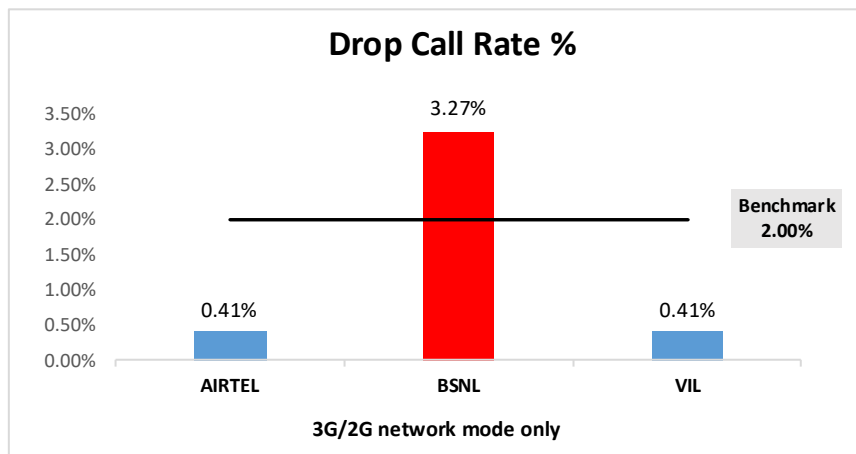


Figure-8: Performance for drop call rate.

(b) Network Technology: This section represent time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	32.79%	NA
2G	99.91%	67.18%	99.99%
Limited Service	0.09%	0.03%	0.01%

Table-14: Time spent on technology during drive test 3G/2G network mode.

Note-

- NA- Service provider doesn't provide services in respective technology.

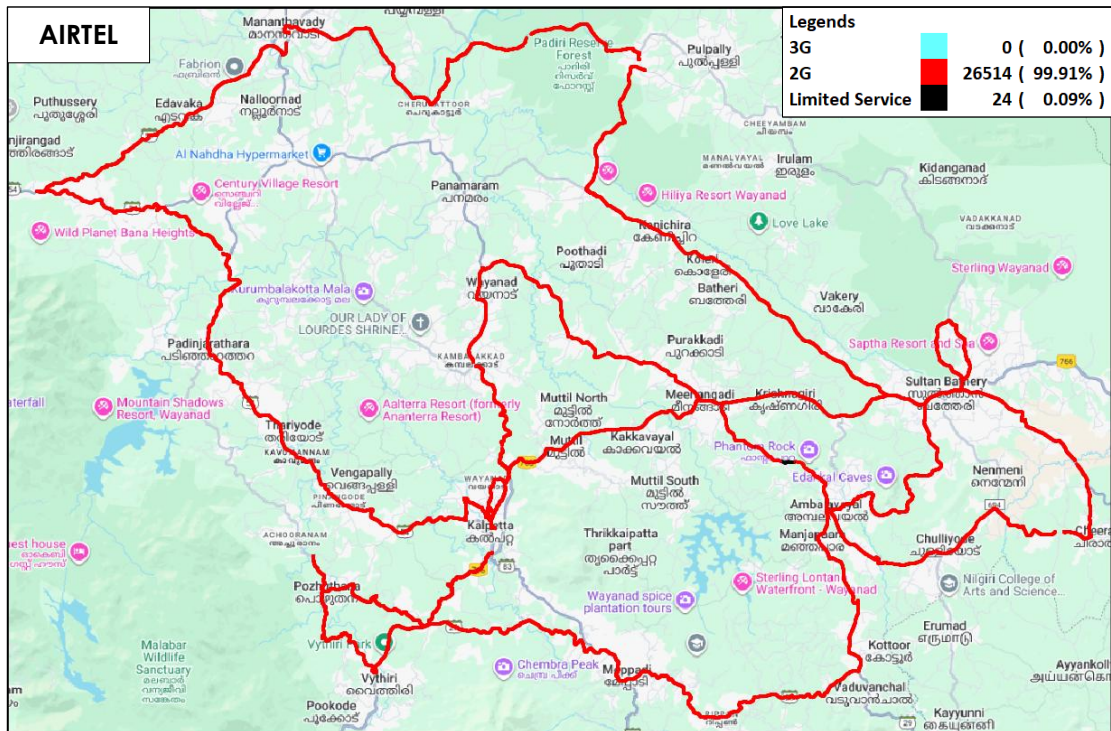


Figure-9: Serving technology plots 3G/2G network mode – AIRTEL

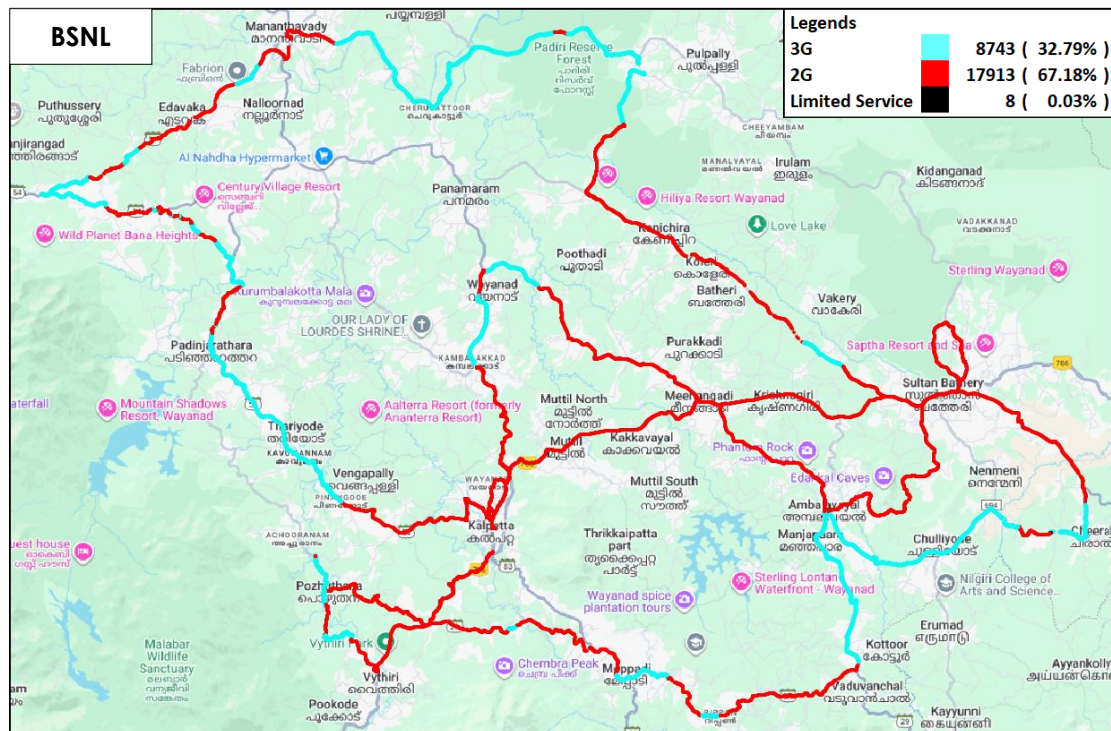


Figure-10: Serving technology plots 3G/2G network mode –BSNL.

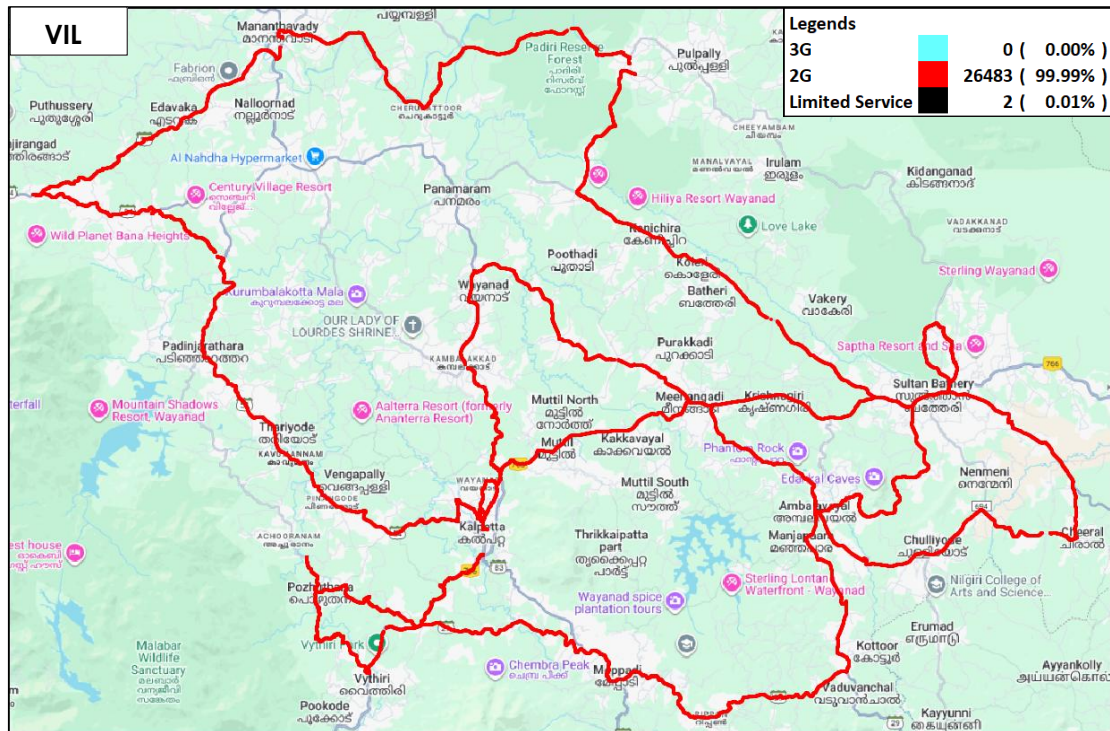


Figure-11: Serving technology plots 3G/2G network mode –VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 42, 43 & 44 for map view)

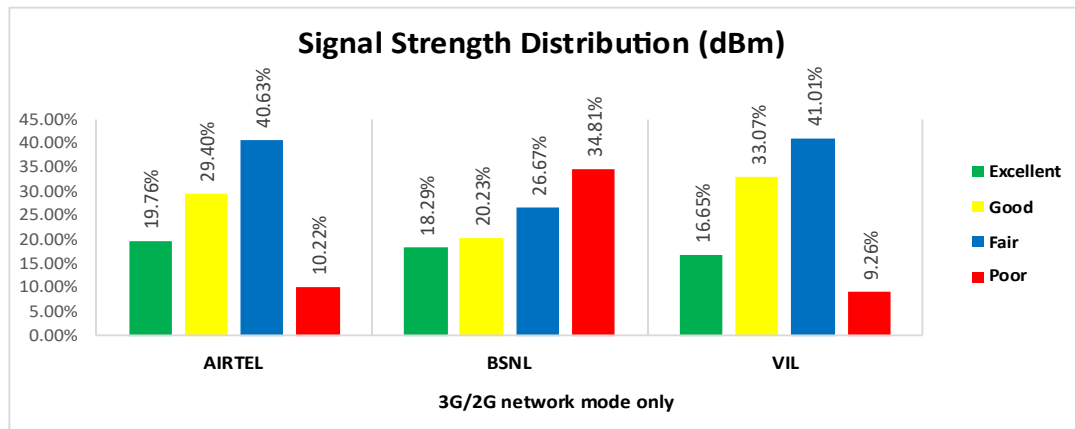


Figure-12: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 20% of samples falling in the excellent signal strength category.
- BSNL has 18% of samples falling in the excellent signal strength category.
- VIL has 17% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	257	271	263	256
Call Setup Success Rate %	100.00	92.62	99.62	99.61
Drop Call Rate %	0.00	4.38	0.38	0.00
Call Setup Time Average (Second)	1.27	2.63	0.61	0.88
Handover Success Rate %	100.00	98.04	99.72	99.93

Table-15: Summary of voice call performance in network auto-selection mode.

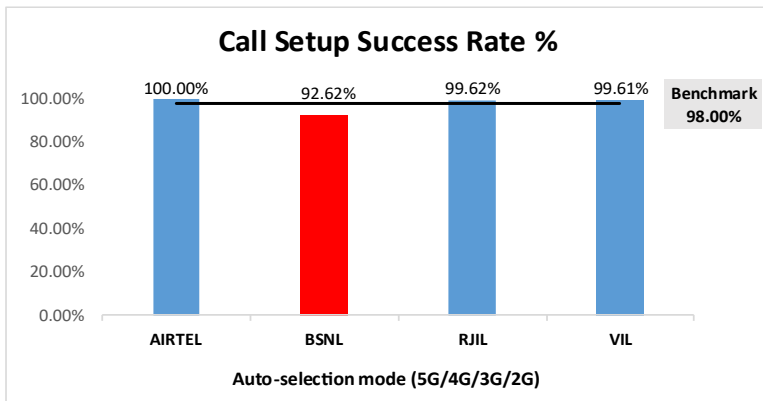


Figure-13: Performance for call setup success rate.

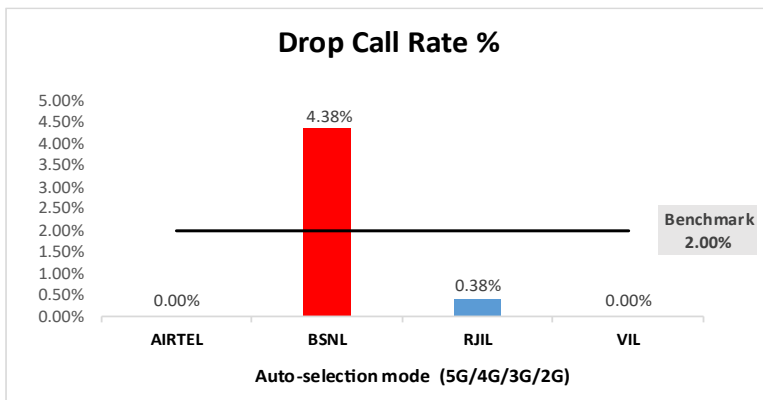


Figure-14: Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	246	258	246	248
Number of silences call for >4 Sec	3	3	4	1
Silence Call Rate %	1.22	1.16	1.63	0.40
Number of silence instances for >4 Sec	3	3	5	1
Number of silence instances for >3 Sec	5	7	10	3
Number of silence instances for >2 sec	6	11	17	20
RTP Jitter (4G & 5G) in ms	4.44	7.49	11.25	18.30
Packet loss Rate Downlink %	0.51	4.73	1.07	0.73
Packet loss Rate Uplink %	0.29	4.75	1.01	0.56

Table-16: Summary of silence instances & packet loss rate for mobile to mobile call.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS value means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-16	1437	1072	1421	1426
Speech Quality (Average MOS)	4.04	2.76	3.84	4.54
Number of samples with MOS ≥ 4 to < 5 (Excellent)	1228	267	922	1276
Number of samples with MOS ≥ 3 to < 4 (Good)	186	130	402	117
Number of samples with MOS ≥ 2 to < 3 (Fair)	10	391	56	24
Number of samples with MOS ≥ 1 to < 2 (Poor)	13	284	41	9
%age of samples with MOS ≥ 4 to < 5 (Excellent)	85.46%	24.91%	64.88%	89.48%
%age of samples with MOS ≥ 3 to < 4 (Good)	12.94%	12.13%	28.29%	8.20%
%age of samples with MOS ≥ 2 to < 3 (Fair)	0.70%	36.47%	3.94%	1.68%
%age of samples with MOS ≥ 1 to < 2 (Poor)	0.90%	26.49%	2.89%	0.63%

Table-17: Summary of speech quality (MOS) samples.

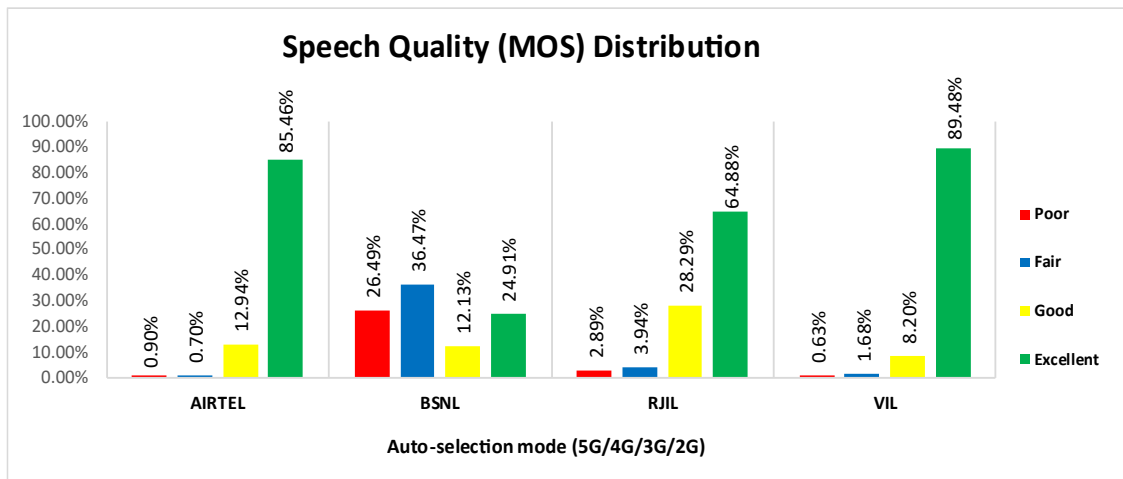


Figure-15: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	3.06%	NA	64.54%	NA
4G	96.94%	48.80%	35.41%	98.88%
3G	NA	9.29%	NA	NA
2G	0.00%	41.61%	NA	1.12%
Limited Service	0.00%	0.29%	0.05%	0.00%

Table-18: Time spent on technology during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.

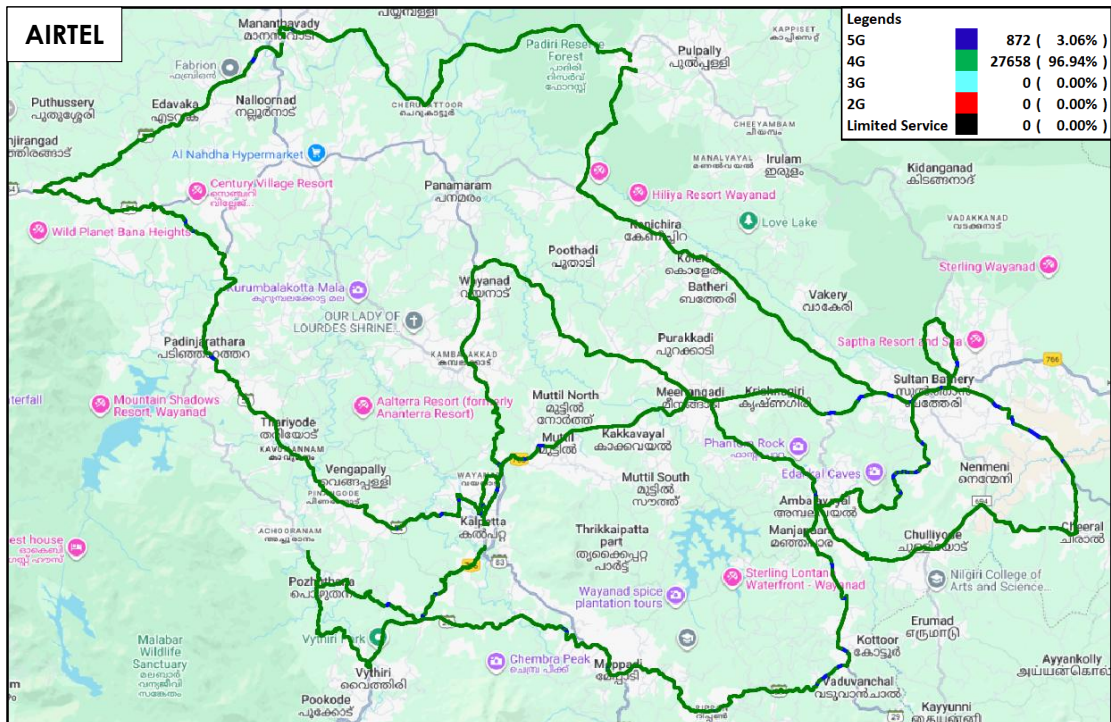


Figure-16: Serving technology plots in auto-selection mode (5G/4G/3G/2G) -AIRTEL.

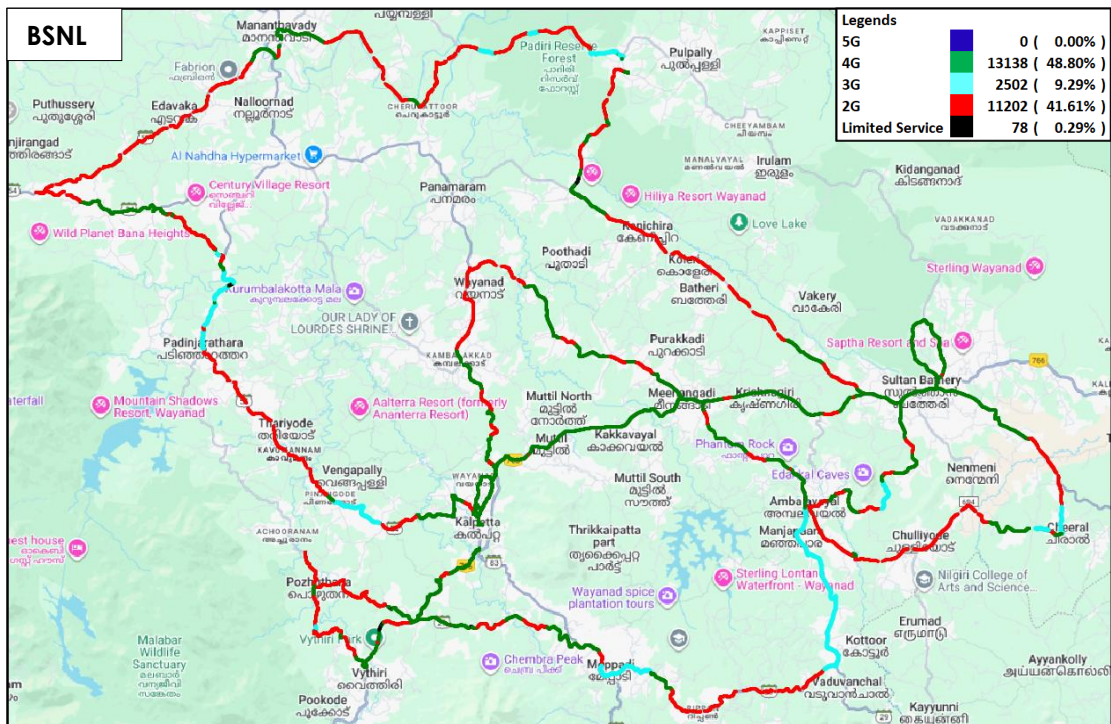


Figure-17: Serving technology plots in auto-selection mode (5G/4G/3G/2G) -BSNL.

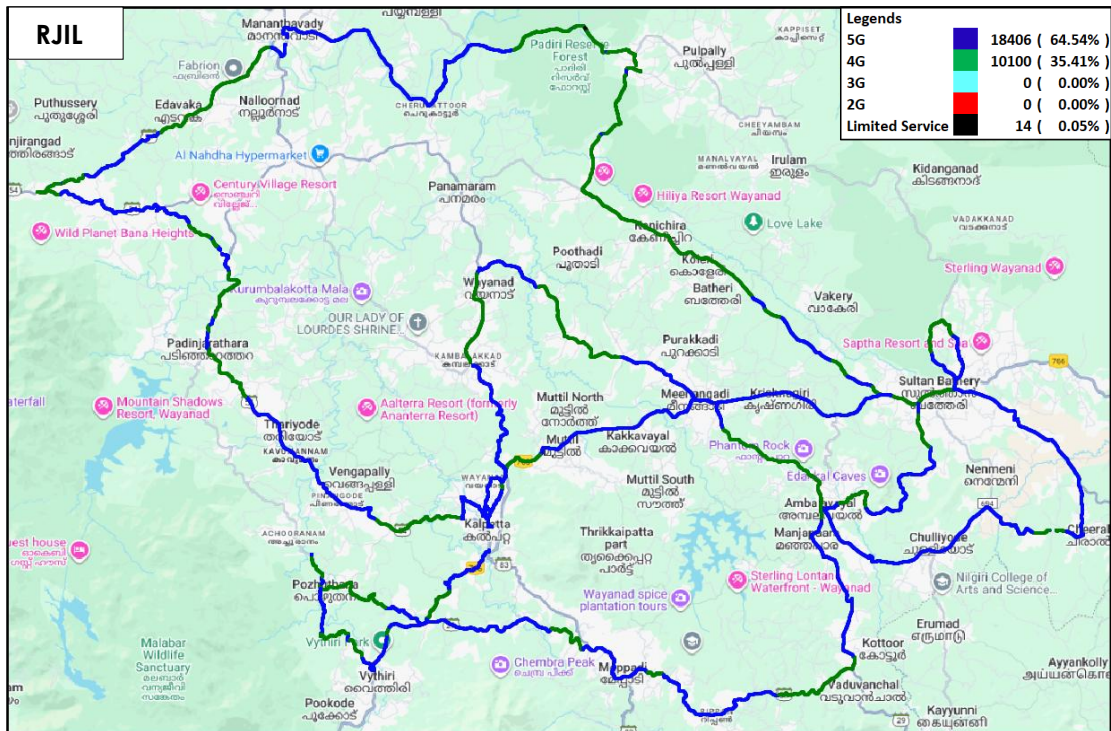


Figure-18: Serving technology plots in auto-selection mode (5G/4G/3G/2G)- RJIL.

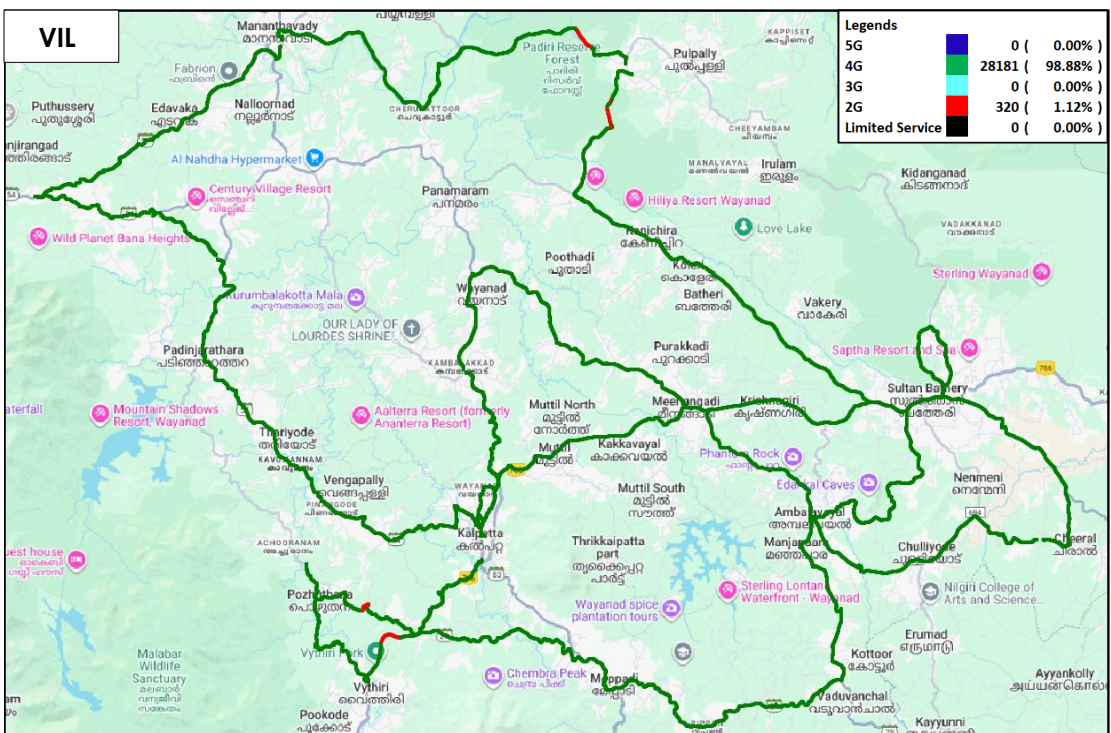


Figure-19: Serving technology plots in auto-selection mode (5G/4G/3G/2G) – VIL

(g) Network Signal Strength Distribution: The following chart provide signal strength distribution for auto-selection mode (5G/4G/3G/2G). (Refer figure-45, 46, 47 & 48 for map view)

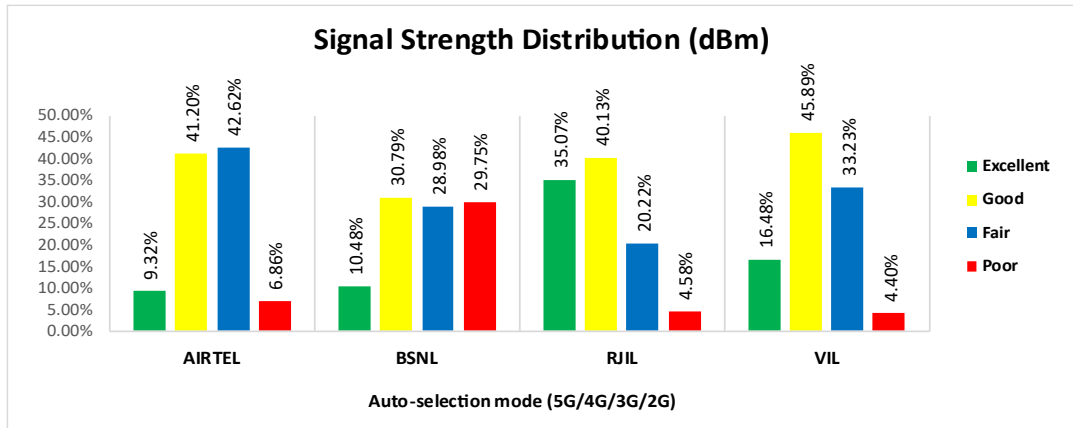


Figure-20: Signal strength distribution auto-selection mode 5G/4G/3G/2G.

Observations:

- Airtel has 9% of samples falling in the excellent signal strength category.
- BSNL has 10% of samples falling in the excellent signal strength category.
- RJIL has 35% of samples falling in the excellent signal strength category.
- VIL has 16% of samples falling in the excellent signal strength category.

4.2.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	87.00	8.14	294.33	17.57
	80th Percentile	139.92	12.34	511.25	29.50
	20th Percentile	22.16	1.84	80.32	8.16
Upload Throughput (Mbits/s)	Average	11.74	5.46	23.97	10.12
	80th Percentile	16.67	9.31	48.61	15.66
	20th Percentile	2.52	1.36	3.32	2.80
Latency (ms)	50th Percentile	41.75	48.80	37.22	29.50

Table-19: Summary of Data performance in network auto-selection mode.

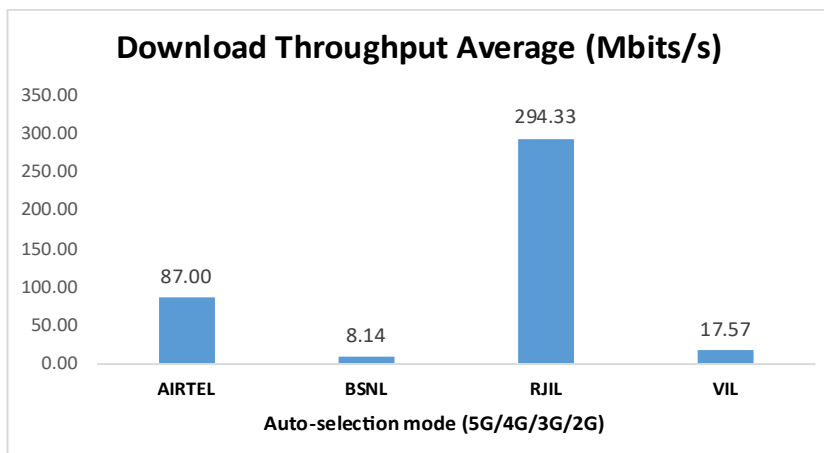


Figure- 21: Download throughput

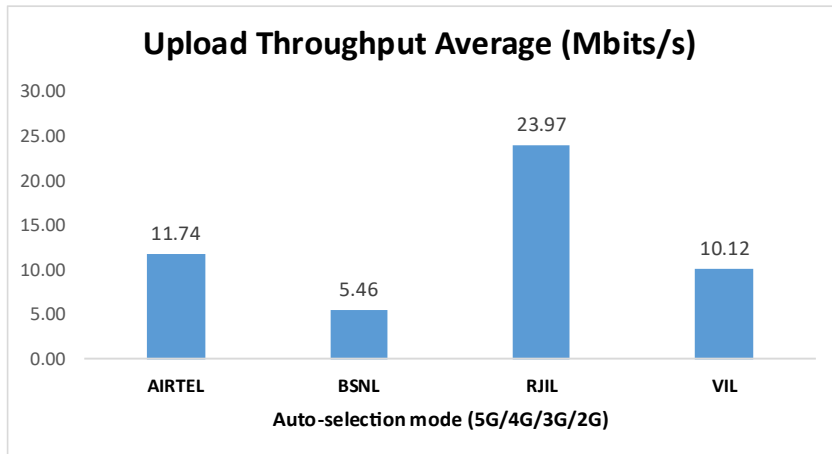


Figure- 22: Upload throughput

4.3 Hotspots

Hotspot testing has been done on 15th October 2025 and 16th October 2025. Eight locations have been tested in the city.

4.3.1 Locations

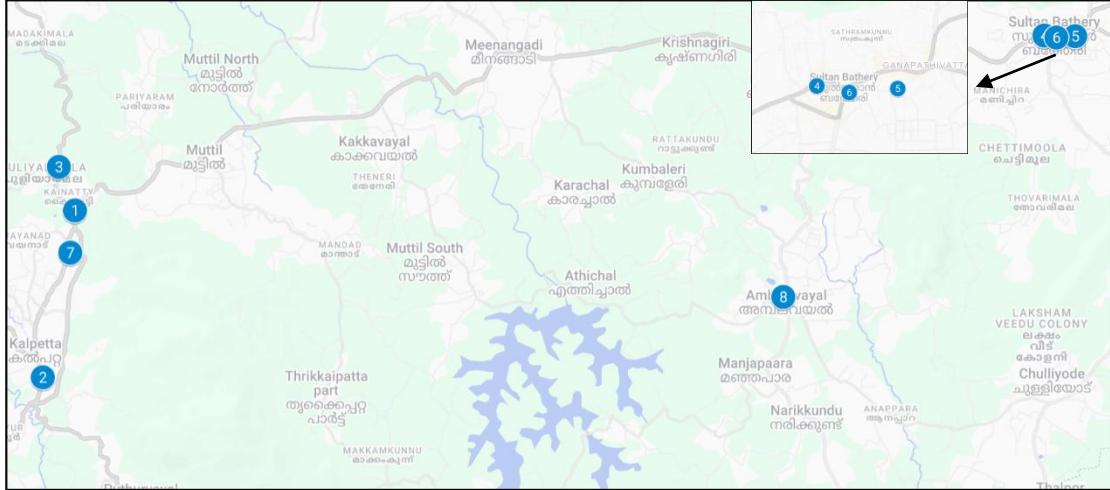


Figure- 23: Hotspot locations

4.3.2 Hotspot covered

1. Government General Hospital Kalpetta
2. Kalpetta New Bus Stand Near NH766
3. Puliarmala Jain Temple Ananthanatha Swami Temple Kalpetta
4. Sulthan Bathery Municipality office Sulthan Bathery
5. Sulthan Bathery Police Station Sulthan Bathery
6. Taluk Headquarters Hospital Sulthan Bathery
7. Wayanad District Collectorate Office Kalpetta
8. Wayanad Heritage Museum Ambalavayal

4.3.3 Voice performance

Overall Voice Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	80	80	80	80
Call Setup Success Rate %	100.00	98.75	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.19	1.10	0.51	0.76

Table-20: Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Government General Hospital Kalpetta				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.10	1.01	0.47	0.75

Table-21: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Kalpetta New Bus Stand Near NH766				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.12	1.08	0.48	0.67

Table-22: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Puliyarmala Jain Temple Ananthanatha Swami Temple Kalpetta				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.17	1.07	0.48	1.15

Table-23: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Sulthan Bathery Municipality office Sulthan Bathery				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.23	1.26	0.46	0.74

Table-24: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Sulthan Bathery Police Station Sulthan Bathery				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.22	1.13	0.47	0.93

Table-25: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Taluk Headquarters Hospital Sulthan Bathery				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.23	1.04	0.60	0.59

Table-26: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Wayanad District Collectorate Office Kalpetta				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.19	1.01	0.46	0.62

Table-27: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Wayanad Heritage Museum Ambalavayal				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	90.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.28	1.18	0.64	0.62

Table-28: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	175.20	12.05	252.27	11.12
Download Throughput 80th Percentile (Mbit/s)	281.80	22.07	410.69	17.16
Download Throughput 20th Percentile (Mbit/s)	42.73	2.55	73.95	3.44
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	29.42	5.94	20.77	12.66
Upload Throughput 80th Percentile (Mbit/s)	50.09	10.29	40.46	18.48
Upload Throughput 20th Percentile (Mbit/s)	2.41	1.22	2.37	2.75
Upload Session Setup Success Rate %	100.00	97.50	100.00	100.00
Web Browsing Delay (Second)	1.87	2.06	1.69	2.18
Youtube Initial Buffer Delay (Second)	1.36	3.35	1.16	1.79
Latency (ms) - 50th Percentile	43.27	45.46	40.99	29.80
Jitter (ms)	13.16	17.90	7.06	12.66
Packet Loss Rate%	3.29	1.71	1.65	10.25
Packet Loss Rate- 90th percentile	6.70	3.60	4.30	33.30

Table-29: Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Government General Hospital Kalpetta				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	29.98	7.96	16.52	2.94
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	2.04	1.22	2.23	2.21
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.14	2.85	2.89	2.41
Youtube Initial Buffer Delay (Second)	3.36	11.35	0.76	1.36
Latency (ms) - 50th Percentile	58.36	53.20	43.92	25.88
Jitter (ms)	31.28	14.17	19.06	7.16
Packet Loss Rate%	3.50	0.90	3.90	2.60

Table-30: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Kalpetta New Bus Stand Near NH766				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	169.65	2.30	107.03	21.03
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	23.69	3.73	9.45	13.35
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.18	2.20	1.52	2.10
Youtube Initial Buffer Delay (Second)	1.06	2.24	0.68	0.91
Latency (ms) - 50th Percentile	41.41	45.44	38.63	35.50
Jitter (ms)	9.37	26.41	4.10	12.63
Packet Loss Rate%	10.10	3.20	0.20	0.70

Table-31: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Puliyarmala Jain Temple Ananthanatha Swami Temple Kalpetta				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	31.37	5.19	66.02	2.08
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	1.92	1.22	3.06	2.09
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	1.65	2.90	1.84	2.75
Youtube Initial Buffer Delay (Second)	1.37	13.75	1.41	5.48
Latency (ms) – 50th Percentile	59.93	52.30	41.15	25.52
Jitter (ms)	38.07	9.23	7.07	3.52
Packet Loss Rate%	5.70	1.60	1.30	3.70

Table-32: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Sulthan Bathery Municipality office Sulthan Bathery				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	184.17	2.14	441.01	8.76
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	41.57	4.47	40.34	21.37
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	1.17	2.30	1.25	2.00
Youtube Initial Buffer Delay (Second)	1.54	4.27	1.14	1.48
Latency (ms) - 50th Percentile	40.94	46.86	42.93	24.96
Jitter (ms)	4.18	33.85	3.14	1.69
Packet Loss Rate%	0.20	2.50	0.00	0.50

Table-33: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Sulthan Bathery Police Station Sulthan Bathery				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	323.96	20.87	391.46	32.51
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	61.88	13.53	36.69	17.27
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	1.63	1.49	1.31	1.82
Youtube Initial Buffer Delay (Second)	1.30	1.35	1.48	1.37
Latency (ms)- 50th Percentile	38.08	40.13	41.08	159.13
Jitter (ms)	1.96	15.14	2.05	57.74
Packet Loss Rate%	0.00	0.10	0.00	70.90

Table-34: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Taluk Headquarters Hospital Sulthan Bathery				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	142.02	21.18	169.07	4.61
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	19.80	4.45	2.71	17.60
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	1.56	1.50	1.92	2.17
Youtube Initial Buffer Delay (Second)	1.24	1.49	1.81	1.89
Latency (ms) – 50 th Percentile	39.93	40.12	40.91	39.82
Jitter (ms)	13.12	14.89	17.18	6.11
Packet Loss Rate%	4.00	1.70	7.40	1.40

Table-35: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Wayanad District Collectorate Office Kalpetta				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	215.97	3.77	184.29	6.86
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	17.11	10.07	7.44	12.04
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	1.88	2.14	1.39	2.28
Youtube Initial Buffer Delay (Second)	0.65	3.65	0.61	1.10
Latency (ms) - 50th Percentile	45.35	40.06	39.50	41.75
Jitter (ms)	5.56	14.12	1.75	5.15
Packet Loss Rate%	2.80	0.60	0.40	1.90

Table-36: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Wayanad Heritage Museum Ambalavayal				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	304.50	33.00	642.77	10.15
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	67.34	9.60	64.22	15.34
Upload Session Setup Success Rate %	100.00	80.00	100.00	100.00
Web Browsing Delay (Second)	1.75	1.46	1.51	1.95
Youtube Initial Buffer Delay (Second)	1.18	1.47	1.15	1.36
Latency (ms) - 50th Percentile	36.68	40.09	43.14	22.10
Jitter (ms)	1.77	15.48	2.15	6.93
Packet Loss Rate%	0.00	3.10	0.00	0.30

Table-37: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)

Overall Data Performance					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	199.06	-	278.78	-
	Upload Throughput Average (Mbits/s)	34.38	-	15.60	-
4G	Download Throughput Average (Mbits/s)	39.71	13.46	56.78	14.54
	Upload Throughput Average (Mbits/s)	4.39	10.27	12.42	12.34

Table-38: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.					
Government General Hospital Kalpetta					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	41.47	-	54.74	-
	Upload Throughput Average (Mbits/s)	2.04	-	4.59	-
4G	Download Throughput Average (Mbits/s)	19.27	17.94	26.36	15.98
	Upload Throughput Average (Mbits/s)	1.64	4.36	1.42	5.30

Table-39: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.					
Kalpetta New Bus Stand Near NH766					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	160.26	-	107.32	-
	Upload Throughput Average (Mbits/s)	21.15	-	7.00	-
4G	Download Throughput Average (Mbits/s)	14.67	3.84	28.17	27.51
	Upload Throughput Average (Mbits/s)	1.65	6.82	17.93	24.53

Table-40: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.					
---	--	--	--	--	--

Puliyarmala Jain Temple Ananthanatha Swami Temple Kalpetta					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	148.76	-
	Upload Throughput Average (Mbits/s)	-	-	3.22	-
4G	Download Throughput Average (Mbits/s)	24.51	1.14	35.83	3.77
	Upload Throughput Average (Mbits/s)	2.83	4.27	3.45	4.63

Table-41: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Sulthan Bathery Municipality office Sulthan Bathery					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	176.98	-	457.95	-
	Upload Throughput Average (Mbits/s)	36.90	-	29.01	-
4G	Download Throughput Average (Mbits/s)	105.52	5.54	71.46	9.71
	Upload Throughput Average (Mbits/s)	11.58	4.99	26.62	23.36

Table-42: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Sulthan Bathery Police Station Sulthan Bathery					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	263.84	-	427.07	-
	Upload Throughput Average (Mbits/s)	47.24	-	30.97	-
4G	Download Throughput Average (Mbits/s)	54.84	23.43	84.78	33.84
	Upload Throughput Average (Mbits/s)	6.38	18.04	14.54	18.21

Table-43: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Taluk Headquarters Hospital Sulthan Bathery					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	117.72	-	224.95	-
	Upload Throughput Average (Mbits/s)	26.66	-	3.04	-
4G	Download Throughput Average (Mbits/s)	33.35	14.94	55.07	7.66
	Upload Throughput Average (Mbits/s)	6.72	15.53	11.64	4.44

Table-44: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Wayanad District Collectorate Office Kalpetta					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	187.59	-	179.17	-
	Upload Throughput Average (Mbits/s)	31.65	-	12.95	-
4G	Download Throughput Average (Mbits/s)	20.69	21.13	46.57	7.11
	Upload Throughput Average (Mbits/s)	2.80	15.98	5.90	10.58

Table-45: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
---	--	--	--	--	--

Wayanad Heritage Museum Ambalavayal					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	350.99	-	630.25	-
	Upload Throughput Average (Mbits/s)	68.52	-	34.06	-
4G	Download Throughput Average (Mbits/s)	44.83	21.30	105.98	10.77
	Upload Throughput Average (Mbits/s)	1.49	13.48	17.89	7.69

Table-46: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

4.4 Walk Test

Walk Test have been conducted on 15th October 2025 and 16th October 2025. Four locations have been tested in the city.

4.4.1 Walk test locations

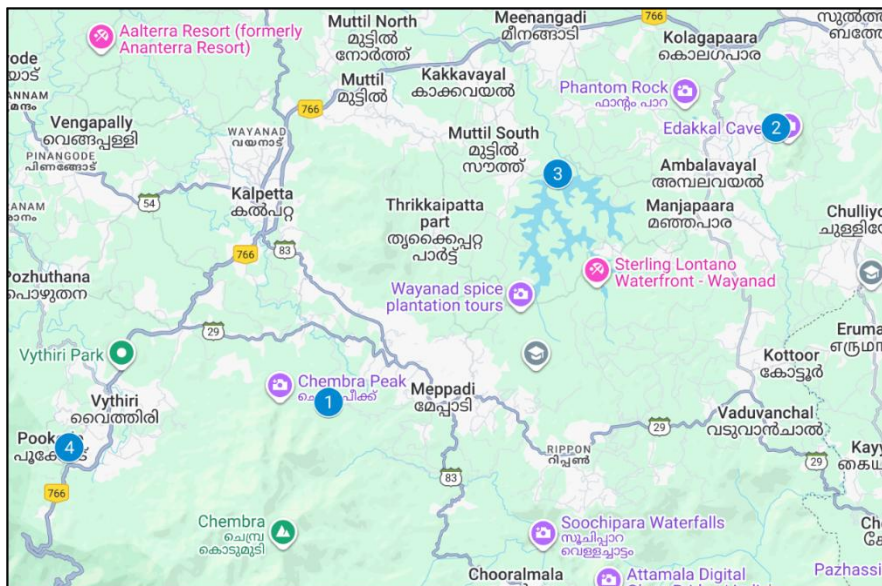


Figure-24: Walk Test locations.

4.4.2 Walk Test Covered

1. Chembra Peak
2. Edakkal Caves Trail Ambalavayal
3. Karapuzha Dam Walkway & Garden Area Kalpetta
4. Pookode Lake Eco-Path Lakkidi

4.4.3 Voice Performance

Chembra Peak				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	28	32	27	26
Call Setup Success Rate %	82.14	81.25	100.00	100.00
Drop Call Rate %	0.00	23.08	0.00	0.00
Call Setup Time-Average (Second)	3.84	4.39	0.80	2.09

Table-47: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Edakkal Caves Trail Ambalavayal				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	16	21	16	16
Call Setup Success Rate %	100.00	57.14	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.32	1.52	1.04	0.64

Table-48: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Karapuzha Dam Walkway & Garden Area Kalpetta				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	18	18	19	18
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.30	2.91	0.55	0.59

Table-49: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Pookode Lake Eco-Path Lakkidi				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	17	15	19	18
Call Setup Success Rate %	100.00	100.00	73.68	83.33
Drop Call Rate %	5.88	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.30	2.33	1.69	1.44

Table-50: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

4.4.4 Data Performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Chembra Peak				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	26.73	2.69	101.17	6.17
Download Session Setup Success Rate %	100.00	100.00	100.00	89.47
Upload Throughput Average (Mbits/s)	3.62	3.70	6.81	6.12
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	52.49	67.52	38.19	26.05

Table-51: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Edakkal Caves Trail Ambalavayal				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	40.41	1.48	56.98	22.41
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	10.67	7.08	3.09	20.56
Upload Session Setup Success Rate %	100.00	100.00	93.33	100.00
Latency (ms) - 50th Percentile	49.38	45.29	40.33	29.67

Table-52: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Karapuzha Dam Walkway & Garden Area Kalpetta				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	75.22	2.19	214.85	14.34
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	5.57	5.20	13.92	16.24
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	46.43	45.30	39.23	28.28

Table-53: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Pookode Lake Eco-Path Lakkidi				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	25.06	9.28	3.39	8.07
Download Session Setup Success Rate %	100.00	100.00	100.00	95.00
Upload Throughput Average (Mbits/s)	1.84	3.16	1.23	5.65
Upload Session Setup Success Rate %	100.00	100.00	100.00	89.47
Latency (ms) - 50th Percentile	59.77	42.94	178.42	39.48

Table-54: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.5 Highway

Drive test has been conducted on 17th October 2025 covering one highway route. (Refer Table-1)

4.5.1 Drive test route

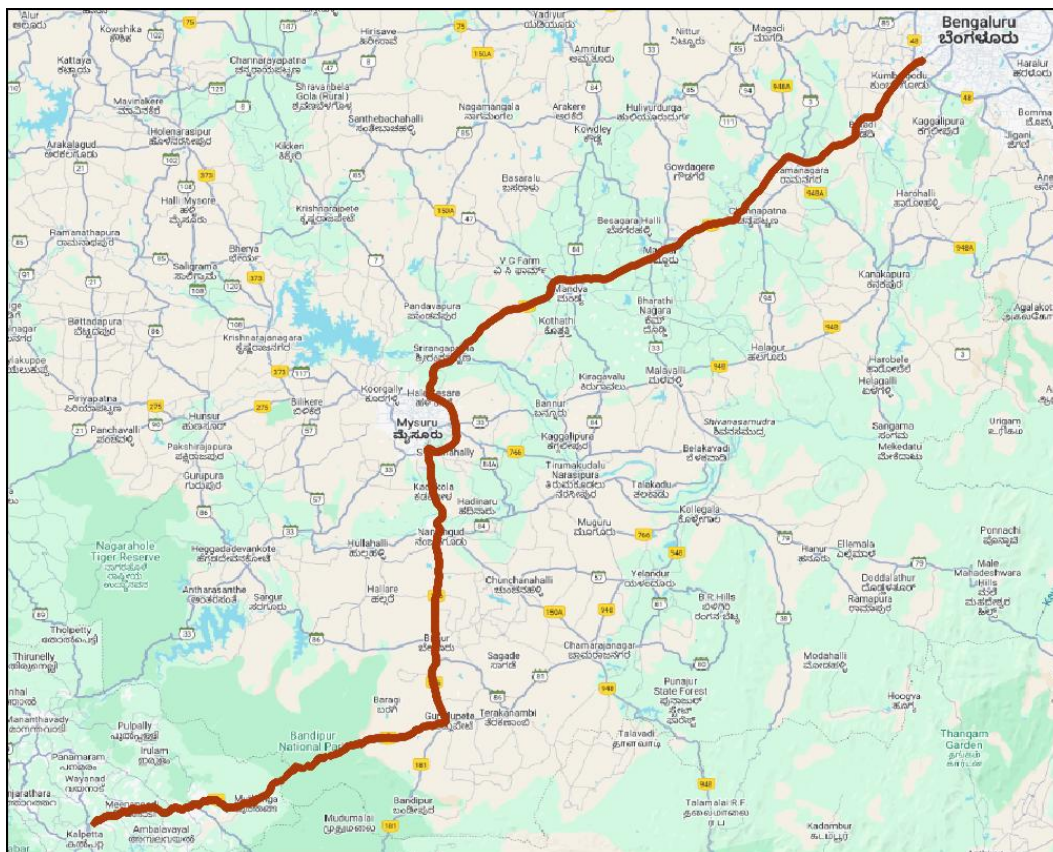


Figure-25: Drive test route highway.

4.5.2 Routes Covered

Kalpetta to Bangalore passing through Muthanga, Gundlupete, Begur, Kadakola, Mysuru, Mandya, Channapatna, Basavanapura, Lakshmi and Kumbalagodu etc.

4.5.3 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	97	106	102
Call Setup Success Rate %	83.51	71.70	79.41
Drop Call Rate %	4.94	7.89	9.88
Call Setup Time-Average (Second)	4.39	5.51	4.42
Handover Success Rate %	98.91	99.04	96.48

Table-55: Summary of voice call performance in 3G/2G network mode only.

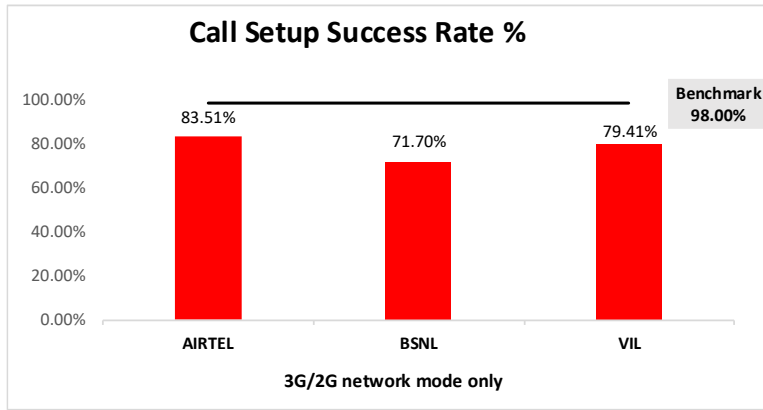


Figure-26: Performance for call setup success rate.

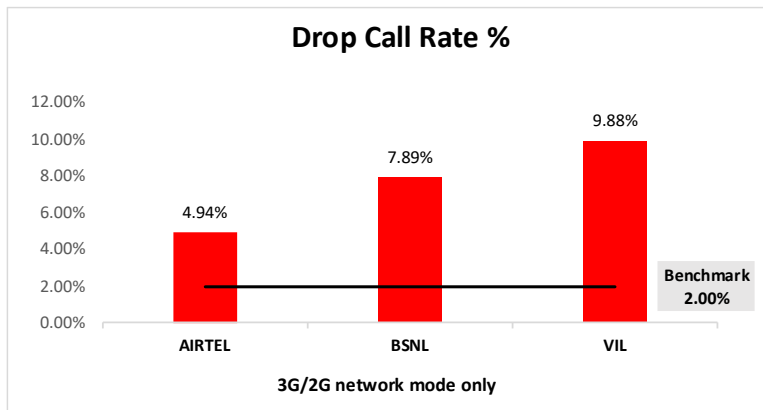


Figure-27: Performance for drop call rate.

(c) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	16.00%	NA
2G	98.62%	79.41%	99.21%
Limited Service	1.38%	4.59%	0.79%

Table-56: Time spent on technology during drive test 3G/2G network mode only.

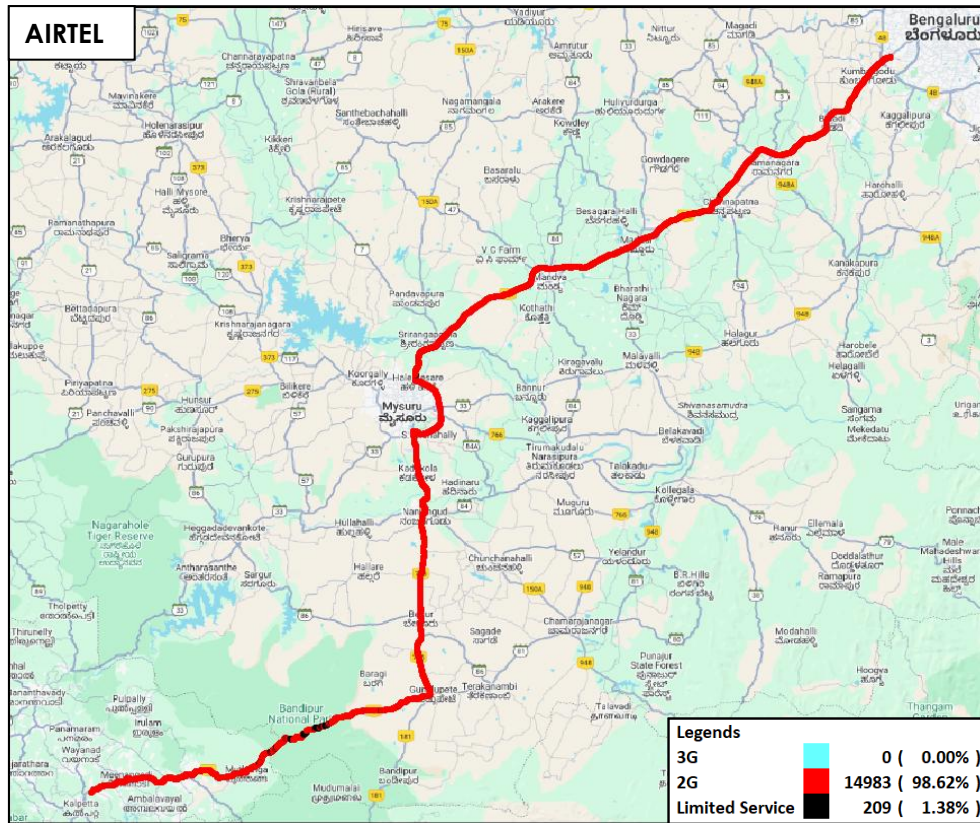


Figure-28: Serving technology plots 3G/2G network mode – AIRTEL.

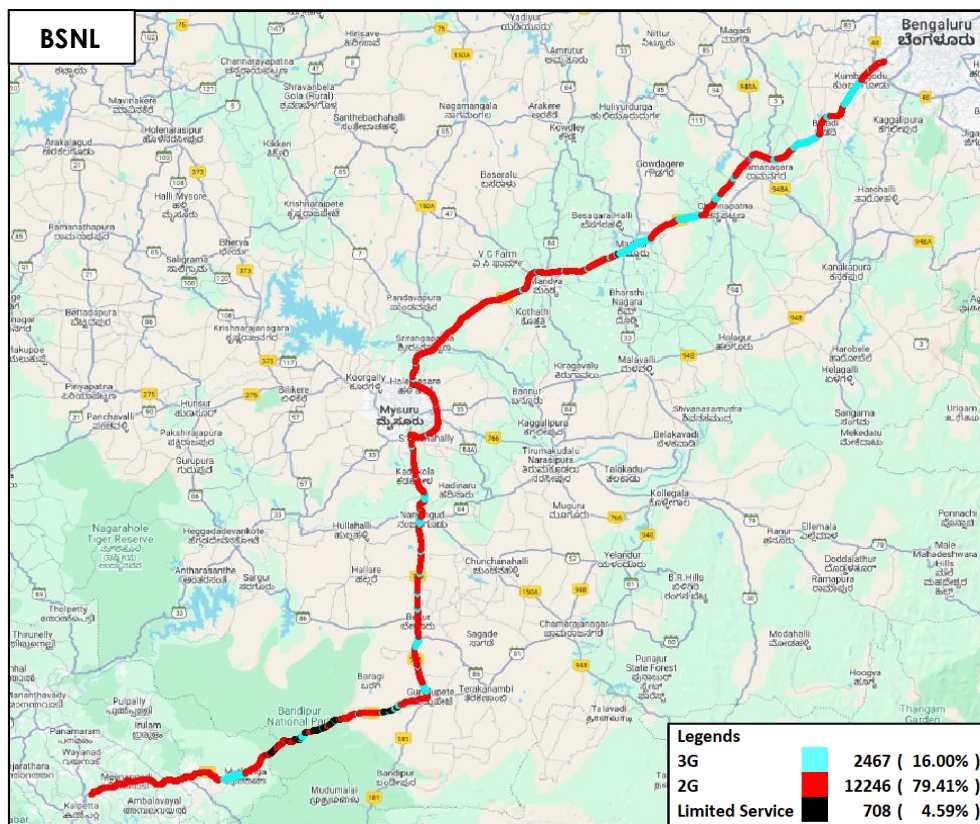


Figure-29: Serving technology plots 3G/2G network mode – BSNL.

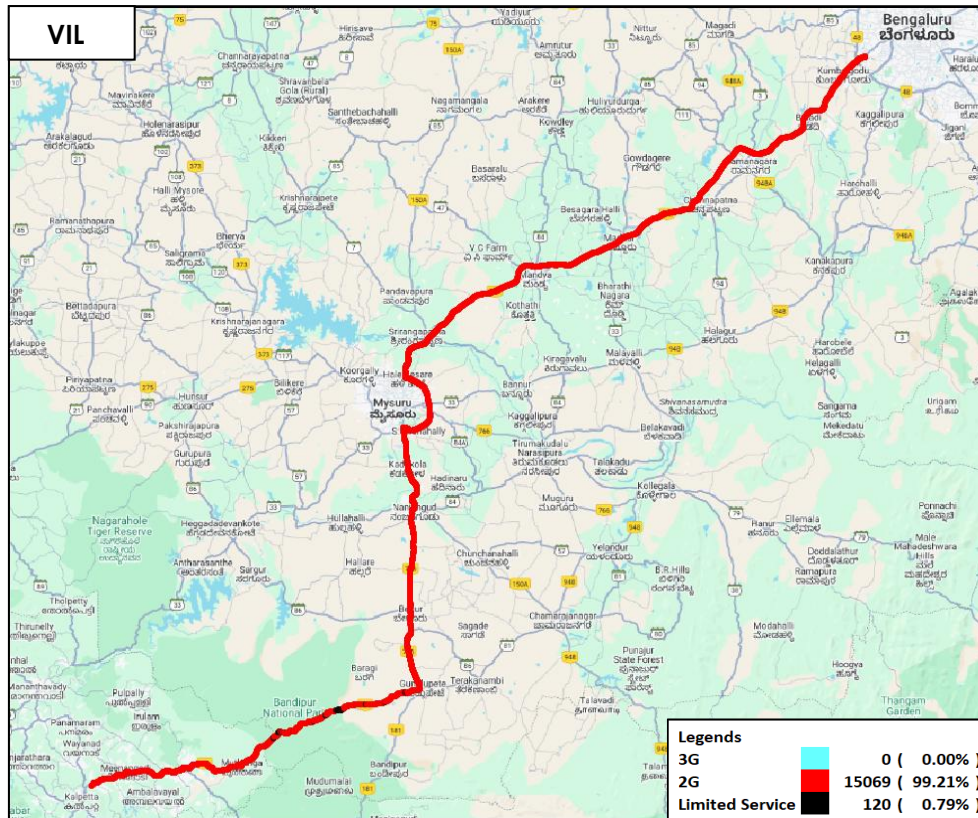


Figure 30: Serving technology plots 3G/2G network mode –VIL.

(c) Network Signal Strength distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (refer figure-49, 50 & 51 for map view)

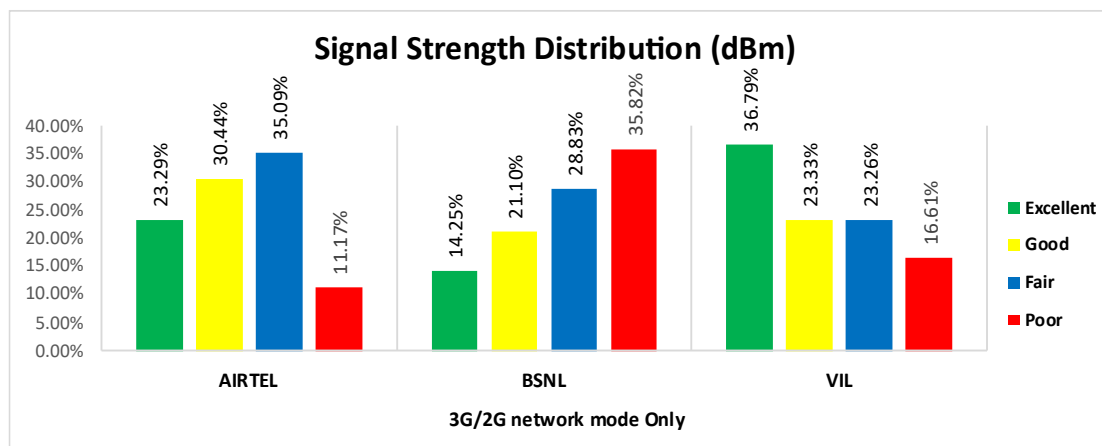


Figure-31: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 23% of samples falling in the excellent signal strength category.
- BSNL has 14% of samples falling in the excellent signal strength category.
- VIL has 37% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	132	116	114	118
Call Setup Success Rate %	52.27	68.97	68.42	68.64
Drop Call Rate %	0.00	10.00	5.13	7.41
Call Setup Time Average (Second)	1.45	3.16	0.90	1.40
Handover Success Rate %	99.87	99.45	99.92	100.00

Table-57: Summary of voice call performance in network auto-selection mode.

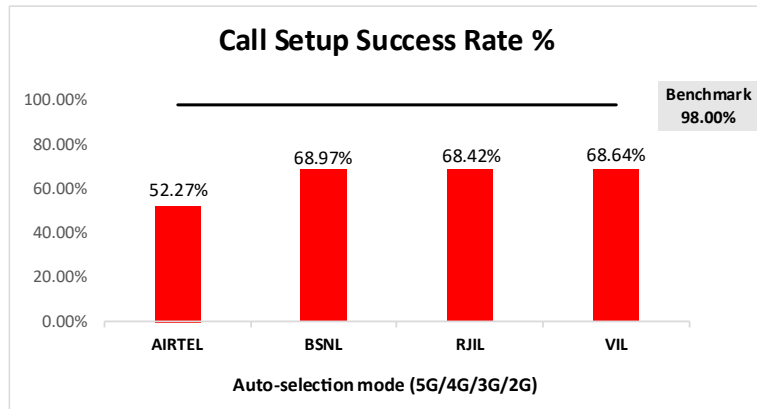


Figure-32: Performance for call setup success rate.

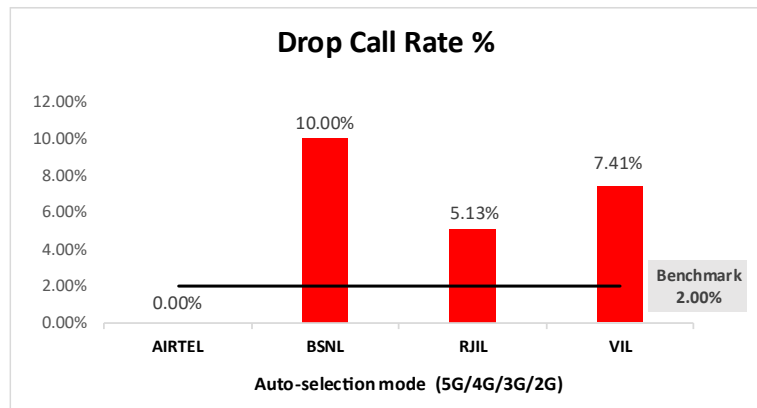


Figure-33: Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	70	81	71	75
Number of silence call for >4 Sec	2	8	2	8
Silence Call Rate %	2.86	9.88	2.82	10.67
Number of silence instances for >4 Sec	2	11	2	14
Number of silence instances for >3 Sec	7	23	3	23
Number of silence instances for >2 sec	31	41	7	48
RTP Jitter (4G & 5G) in ms	4.52	7.26	11.91	17.30
Packet loss Rate Downlink %	2.01	6.61	1.18	3.62
Packet loss Rate Uplink %	2.51	6.96	1.26	1.54

Table-58: Summary of silence instances & packet loss rate for mobile-to-mobile call.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-58	819	716	810	728
Speech Quality (Average MOS)	3.82	3.02	3.79	4.37
Number of samples with MOS >=4 to <5 (Excellent)	615	202	528	610
Number of samples with MOS >=3 to <4 (Good)	124	198	205	69
Number of samples with MOS >=2 to <3 (Fair)	27	186	43	15
Number of samples with MOS >=1 to <2 (Poor)	53	130	34	34
%age of samples with MOS >=4 to <5 (Excellent)	75.09%	28.21%	65.19%	83.79%
%age of samples with MOS >=3 to <4 (Good)	15.14%	27.65%	25.31%	9.48%
%age of samples with MOS >=2 to <3 (Fair)	3.30%	25.98%	5.31%	2.06%
%age of samples with MOS >=1 to <2 (Poor)	6.47%	18.16%	4.20%	4.67%

Table-59: Summary of speech quality (MOS) samples.

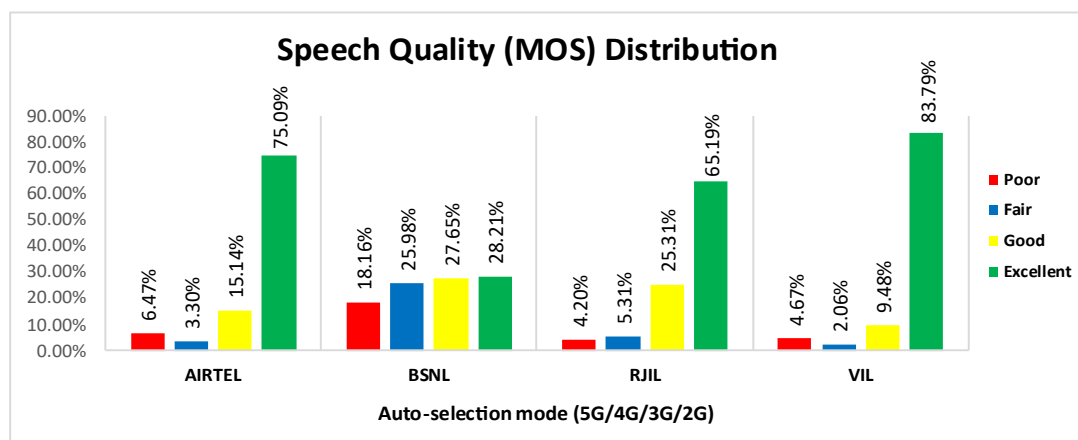


Figure-34: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	2.55%	NA	51.26%	NA
4G	92.82%	64.87%	45.38%	85.23%
3G	NA	4.62%	NA	NA
2G	1.85%	24.36%	NA	12.24%
Limited Service	2.78%	6.15%	3.36%	2.52%

Table-60: Time spent on technology during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.

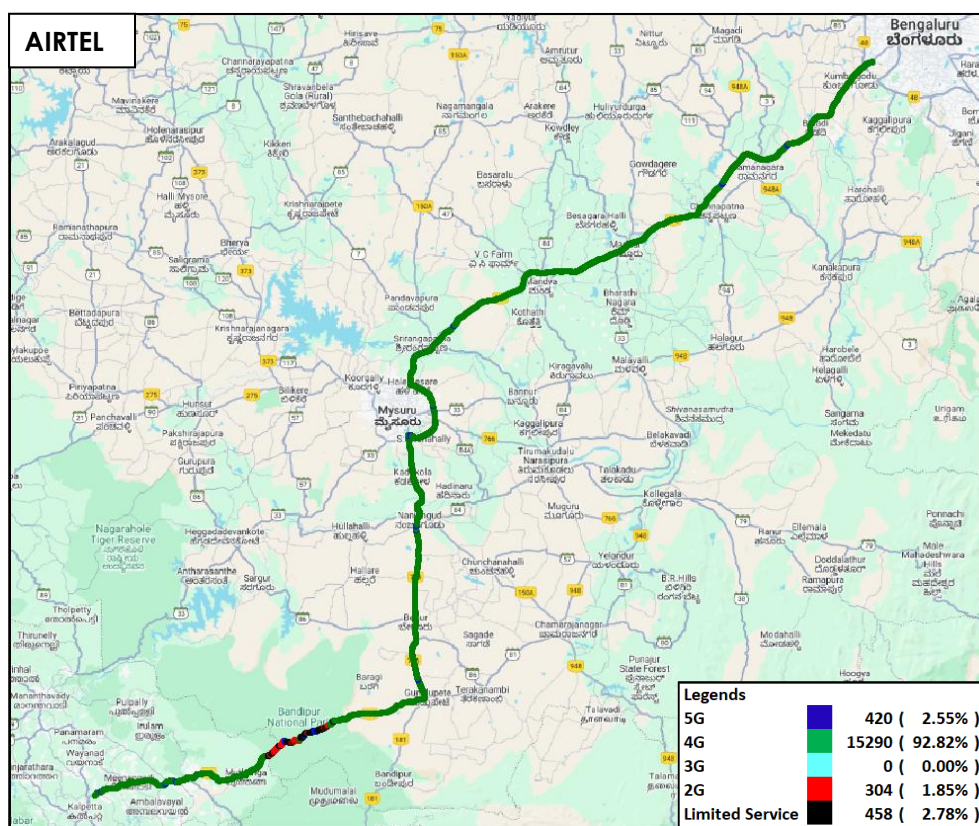


Figure-35: Serving technology plots in auto-selection mode (5G/4G/3G/2G)-AIRTEL

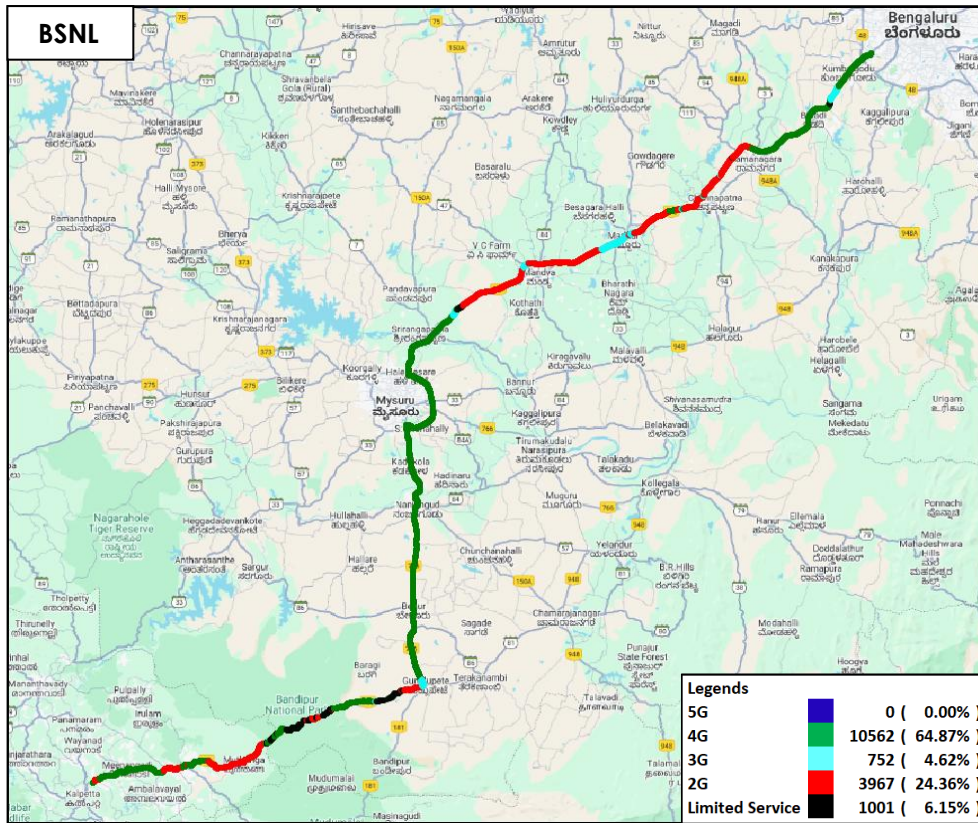


Figure-36: Serving technology plots in auto-selection mode (5G/4G/3G/2G)-BSNL.

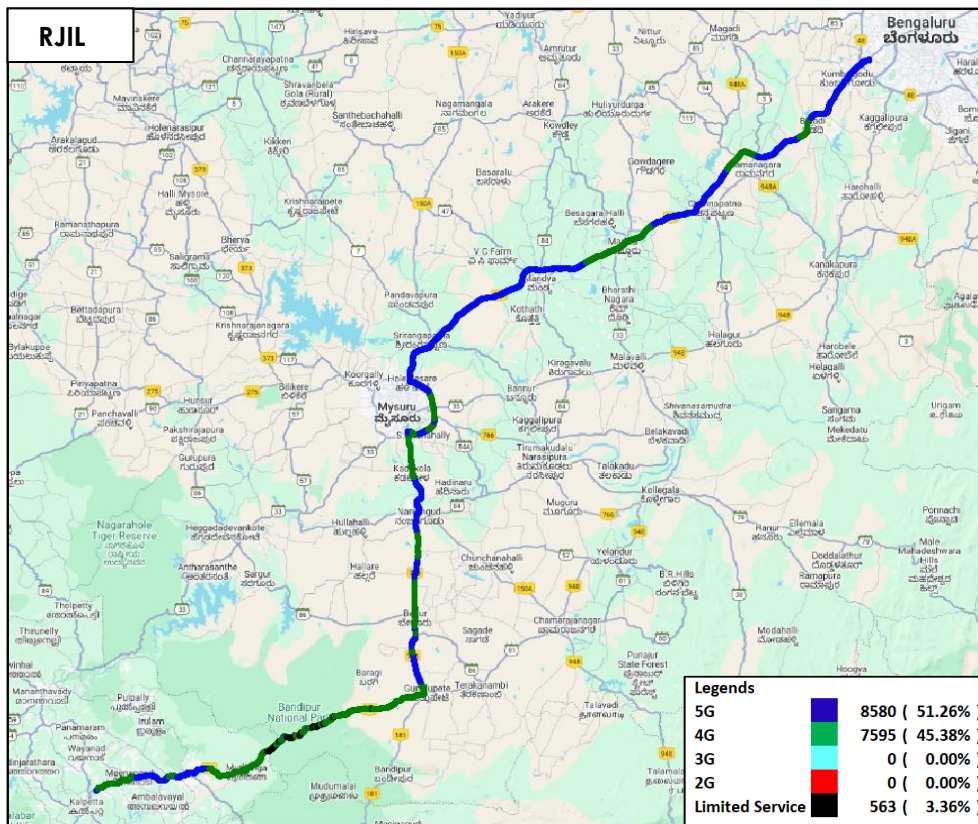


Figure-37: Serving technology plots in auto-selection mode (5G/4G/3G/2G)-RJIL.

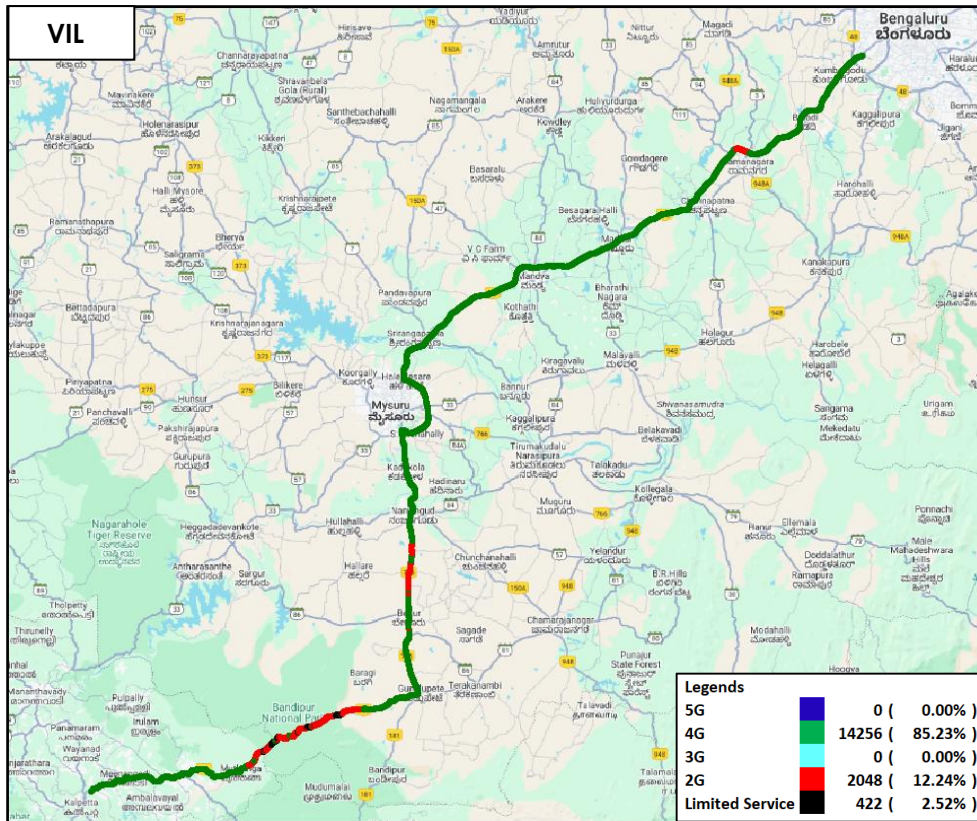


Figure-38: Serving technology plots in auto-selection mode (5G/4G/3G/2G)-VIL.

(g) Network Signal Strength distribution: The following chart provide signal strength distribution for auto-selection mode (5G/4G/3G/2G). (refer figure-52, 53, 54 & 55 for map view)

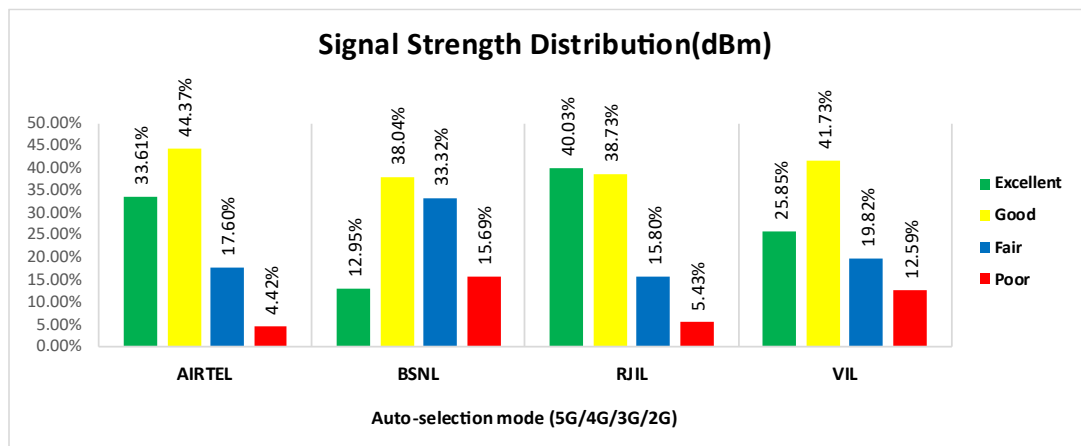


Figure-39: Signal strength distribution auto-selection mode 5G/4G/3G/2G.

Observations:

- Airtel has 34% of samples falling in the excellent signal strength category.
- BSNL has 13% of samples falling in the excellent signal strength category.
- RJIL has 40% of samples falling in the excellent signal strength category.
- VIL has 26% of samples falling in the excellent signal strength category.

4.5.4 Data performance

(a)Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	145.23	5.20	307.57	22.26
	80th Percentile	223.09	7.08	490.38	33.83
	20th Percentile	43.08	0.90	114.24	8.68
Upload Throughput (Mbits/s)	Average	26.72	2.27	24.42	15.62
	80th Percentile	47.27	3.57	40.84	26.14
	20th Percentile	7.68	0.85	6.13	3.93
Latency (ms)	50th Percentile	38.83	58.72	40.39	42.06

Table-61: Summary of Data performance in network auto-selection mode.

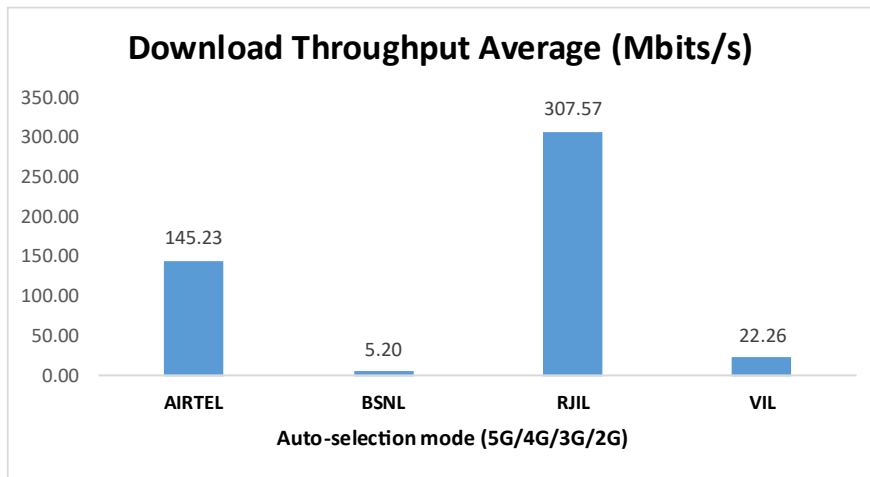


Figure-40: Download throughput.

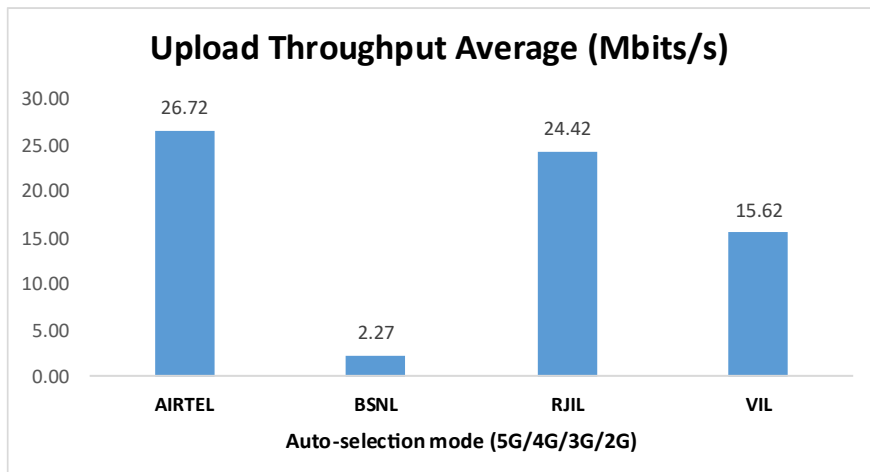


Figure-41: Upload throughput.

5. Voice & Data Key findings

5.1 Overall Voice

1. Call Setup Success Rate:

- a) Airtel, BSNL and VIL have 94.72%, 90.93% and 93.37% call setup success rate respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL have 87.59%, 86.98%, 92.19% and 92.29% call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- c) All operators have 100.00% call setup success rate while calling on peer service provider's network. (refer to Table-9)

2. Call Setup Time:

- a) Airtel, BSNL and VIL call setup time is 4.26, 4.50 and 3.77 seconds respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL & VIL call setup time is 1.41, 2.54, 0.69 & 1.01 seconds respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

3. Call Silence/Mute Rate:

In packet switched network (4G/5G) BSNL, VIL, RJIL and Airtel have 3.24%, 2.79%, 1.89%, 1.58% silence call rate respectively. Further BSNL has higher RTP packet loss rate in downlink (5.36%) compared to VIL (1.34%), RJIL (1.09%), Airtel (0.83%). In uplink the RTP packet loss rate is higher for BSNL (5.34%) compared to RJIL (1.06%), Airtel (0.76%), VIL (0.75%). (refer table-6)

4. Drop Call Rate:

- a) Airtel, BSNL and VIL drop call rate is 1.55%, 4.36% and 2.78% respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL drop call rate is 0.21%, 5.20%, 1.01% and 1.22% respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

5.2 Overall Data

1. Data download and upload performance (Overall i.e. LSA):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 104.79 Mbps, 7.34 Mbps, 272.45 Mbps and 17.73 Mbps respectively. (refer table-11)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 16.71 Mbps, 4.64 Mbps, 21.79 Mbps and 12.19 Mbps respectively. (refer table-11)

2. Data download and upload performance (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 175.20 Mbps, 12.05 Mbps, 252.27 Mbps and 11.12 Mbps respectively. (refer table-29)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 29.42 Mbps, 5.94 Mbps, 20.77 Mbps and 12.66 Mbps respectively. (refer table-29)

3. Data session setup success rate (static i.e. while stationary):

- a) All operators have 100.00% download session setup success rate. (refer table-29)
- b) Airtel, BSNL, RJIL and VIL have 100.00%, 97.50%, 100.00% and 100.00% upload session setup success rate respectively. (refer table-29)

5.3 Operator wise Key Findings

1. Airtel:

Voice

- 94.72% call setup success rate and 1.55% drop call rate have been observed in 3G/2G network mode for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-3)
- 87.59% call setup success rate and 0.21% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-5)
- 99.18% call setup success rate and 0.41% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 82.14% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Chembra Peak walk test location. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-47)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Edakkal Caves Trail Ambalavayal and Karapuzha Dam Walkway & Garden Area Kalpetta walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-48 & 49)
- 100.00% call setup success rate and 5.88% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Pookode Lake Eco-Path Lakkidi walk test location. Performance is not meeting the benchmark of 2.00% for call drop call rate. (refer table-50)
- 83.51% call setup success rate and 4.94% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-55)
- 52.27% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-57)

Data

- Airtel has 104.79 Mbps average download speed & 16.71 Mbps average upload speed for LSA. (refer table-11)
- Airtel has 87.00 Mbps average download speed & 11.74 Mbps average upload speed across measured routes for city drive. (refer table-19)
- Government General Hospital Kalpetta and Puliarmala Jain Temple Ananthanatha Swami Temple Kalpetta have less download speed (less than 100 Mbps) out of total 8 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-30 & 32)

- Government General Hospital Kalpetta, Puliyarmala Jain Temple Ananthanatha Swami Temple Kalpetta, Taluk Headquarters Hospital Sulthan Bathery and Wayanad District Collectorate Office Kalpetta have less upload speed (less than 20 Mbps) out of total 8 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-30, 32, 35 & 36)
- All walk test locations have less download speed (less than 100 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 51, 52, 53 & 54)
- All walk test locations have less upload speed (less than 20 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 51, 52, 53 & 54)
- Airtel has 145.23 Mbps average download speed & 26.72 Mbps average upload speed across measured routes for highway drive. (refer table-61)

2. BSNL:

Voice

- 90.93% call setup success rate and 4.36% drop call rate have been observed in 3G/2G network mode for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 86.98% call setup success rate and 5.20% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 99.19% call setup success rate and 3.27% drop call rate have been observed in 3G/2G network mode for city drive. Performance is not meeting the benchmark of 2.00% for drop call rate. (refer table-13)
- 92.62% call setup success rate and 4.38% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 98.75% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 81.25% call setup success rate and 23.08% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Chembra Peak walk test location. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-47)
- 57.14% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Edakkal Caves Trail Ambalavayal walk test location. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-48)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Karapuzha Dam Walkway & Garden Area Kalpetta and Pookode Lake Eco-Path Lakkidi walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-49 & 50)
- 71.70% call setup success rate and 7.89% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-55)
- 68.97% call setup success rate and 10.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-57)

Data

- BSNL has 7.34 Mbps average download speed & 4.64 Mbps average upload speed for LSA. (refer table-11)
- BSNL has 8.14 Mbps average download speed & 5.46 Mbps average upload speed across measured routes for city drive. (refer table-19)
- Government General Hospital Kalpetta, Kalpetta New Bus Stand Near NH766, Puliarmala Jain Temple Ananthanatha Swami Temple Kalpetta, Sulthan Bathery Municipality office Sulthan Bathery and Wayanad District Collectorate Office Kalpetta have less download speed (less than 10 Mbps) out of total 8 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-30, 31, 32, 33 & 36)
- Government General Hospital Kalpetta and Puliarmala Jain Temple Ananthanatha Swami Temple Kalpetta have less upload speed (less than 2 Mbps) out of total 8 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-30 & 32)
- All walk test locations have less download speed (less than 10 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 51, 52, 53 & 54)
- BSNL has 5.20 Mbps average download speed & 2.27 Mbps average upload speed across measured routes for highway drive. (refer table-61)

3. RJIL:

Voice

- 92.19% call setup success rate and 1.01% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-5)
- 99.62% call setup success rate and 0.38% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Chembra Peak, Edakkal Caves Trail Ambalavayal and Karapuzha Dam Walkway & Garden Area Kalpetta walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-47, 48 & 49)
- 73.68% call setup success rate and 0.00% drop call rate have been observed for auto-selection mode (5G/4G/3G/2G) at Pookode Lake Eco-Path Lakkidi walk test location. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-50)
- 68.42% call setup success rate and 5.13% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-57)

Data

- RJIL has 272.45 Mbps average download speed & 21.79 Mbps average upload speed for LSA. (refer table-11)

- RJIL has 294.33 Mbps average download speed & 23.97 Mbps average upload speed across measured routes for city drive. (refer table-19)
- Government General Hospital Kalpetta and Puliarmala Jain Temple Ananthanatha Swami Temple Kalpetta have less download speed (less than 100 Mbps) out of total 8 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-30 & 32)
- Government General Hospital Kalpetta, Kalpetta New Bus Stand Near NH766, Puliarmala Jain Temple Ananthanatha Swami Temple Kalpetta, Taluk Headquarters Hospital Sulthan Bathery and Wayanad District Collectorate Office Kalpetta have less upload speed (less than 20 Mbps) out of total 8 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-30, 31, 32, 35 & 36)
- Edakkal Caves Trail Ambalavayal and Pookode Lake Eco-Path Lakkidi have less download speed (less than 100 Mbps) out of total 4 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-52 & 54)
- All walk test locations have less upload speed (less than 20 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 51, 52, 53 & 54)
- RJIL has 307.57 Mbps average download speed & 24.42 Mbps average upload speed across measured routes for highway drive. (refer table-61)

4. VII: Voice

- 93.37% call setup success rate and 2.78% drop call rate have been observed in 3G/2G network mode for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 92.29% call setup success rate and 1.22% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-5)
- 99.18% call setup success rate and 0.41% drop call rate have been observed in 3G/2G network mode for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 99.61% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Chembra Peak, Edakkal Caves Trail Ambalavayal and Karapuzha Dam Walkway & Garden Area Kalpetta walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-47, 48 & 49)
- 83.33% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Pookode Lake Eco-Path Lakkidi walk test location. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-50)

- 79.41% call setup success rate and 9.88% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-55)
- 68.64% call setup success rate and 7.41% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-57)

Data

- VIL has 17.73 Mbps average download speed & 12.19 Mbps average upload speed for LSA. (refer table-11)
- VIL has 17.57 Mbps average download speed & 10.12 Mbps average upload speed across measured routes for city drive. (refer table-19)
- Government General Hospital Kalpetta, Puliarmala Jain Temple Ananthanatha Swami Temple Kalpetta, Sulthan Bathery Municipality office Sulthan Bathery, Taluk Headquarters Hospital Sulthan Bathery and Wayanad District Collectorate Office Kalpetta have less download speed (less than 10 Mbps) out of total 8 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-30, 32, 33, 35 & 36)
- Chembra Peak and Pookode Lake Eco-Path Lakkidi have less download speed (less than 10 Mbps) out of total 4 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-51 & 54)
- VIL has 22.26 Mbps average download speed & 15.62 Mbps average upload speed across measured routes for highway drive. (refer table-61)

6. Annexure

6.1 Route wise coverage map

6.1.1 City

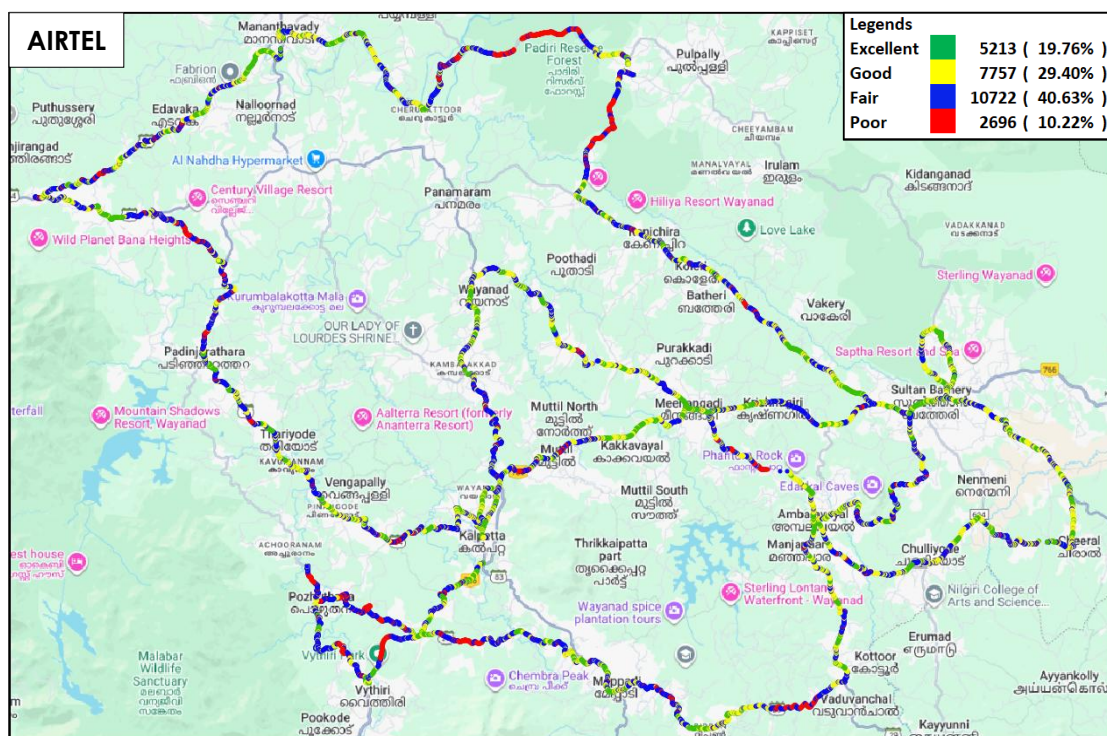


Figure-42: Signal strength 3G/2G network mode – AIRTEL.

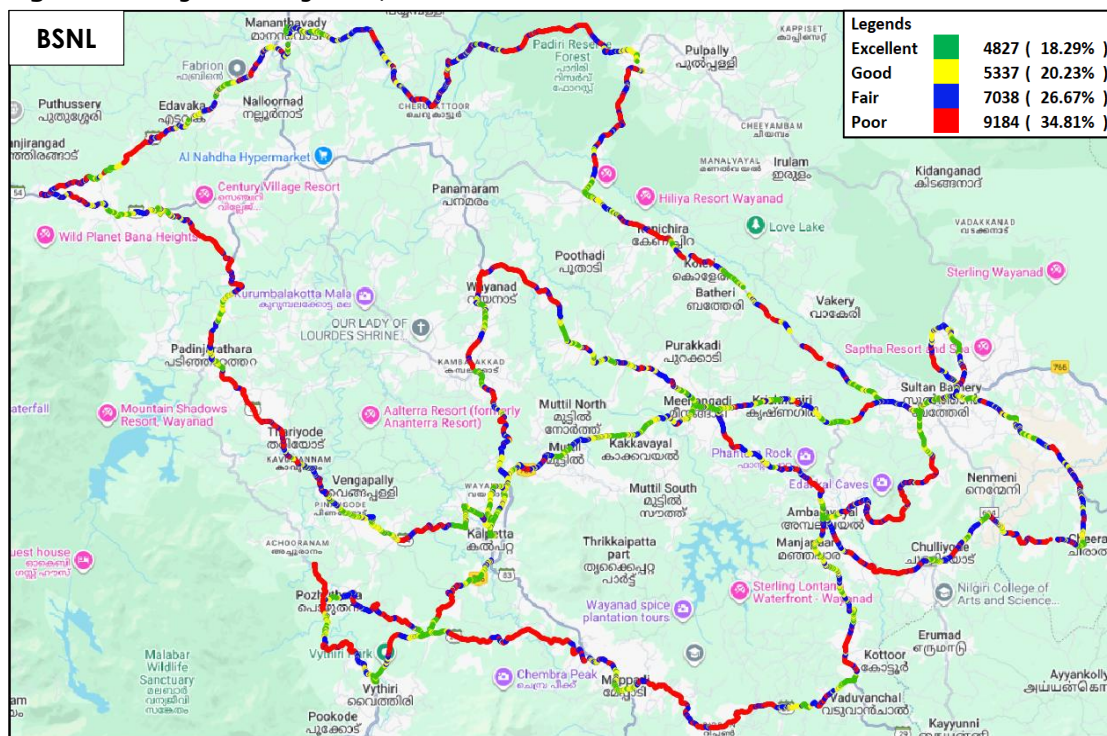


Figure-43: Signal strength 3G/2G network mode – BSNL.

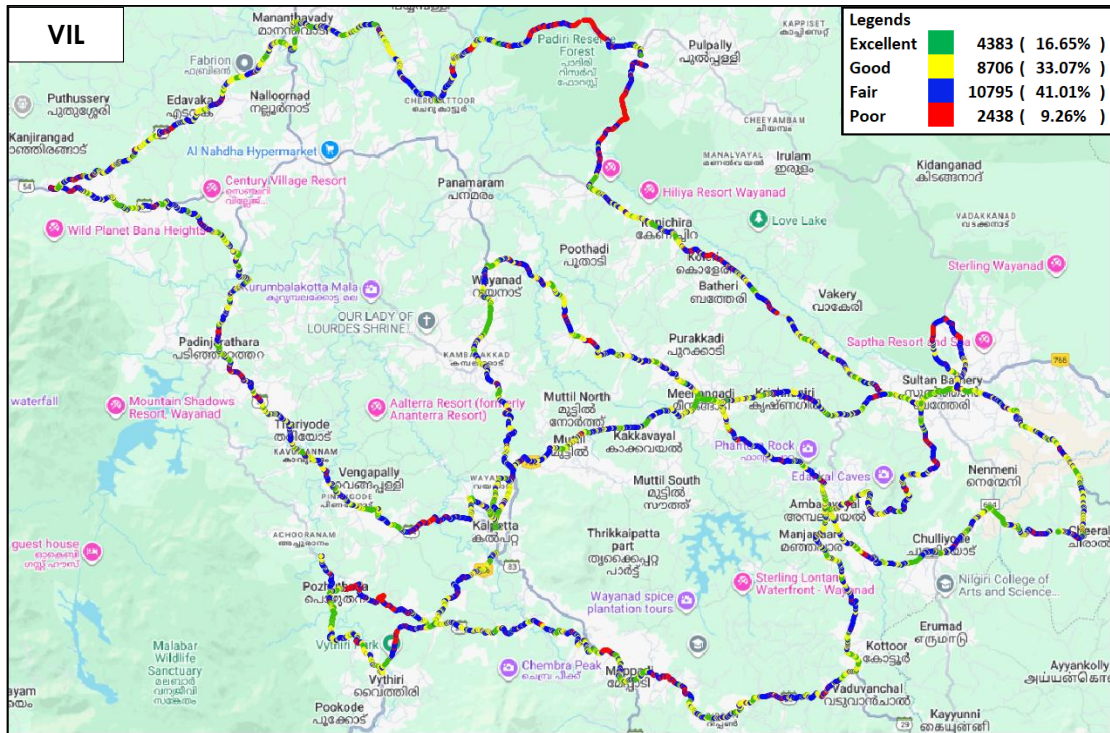


Figure-44: Signal strength 3G/2G network mode – VIL.

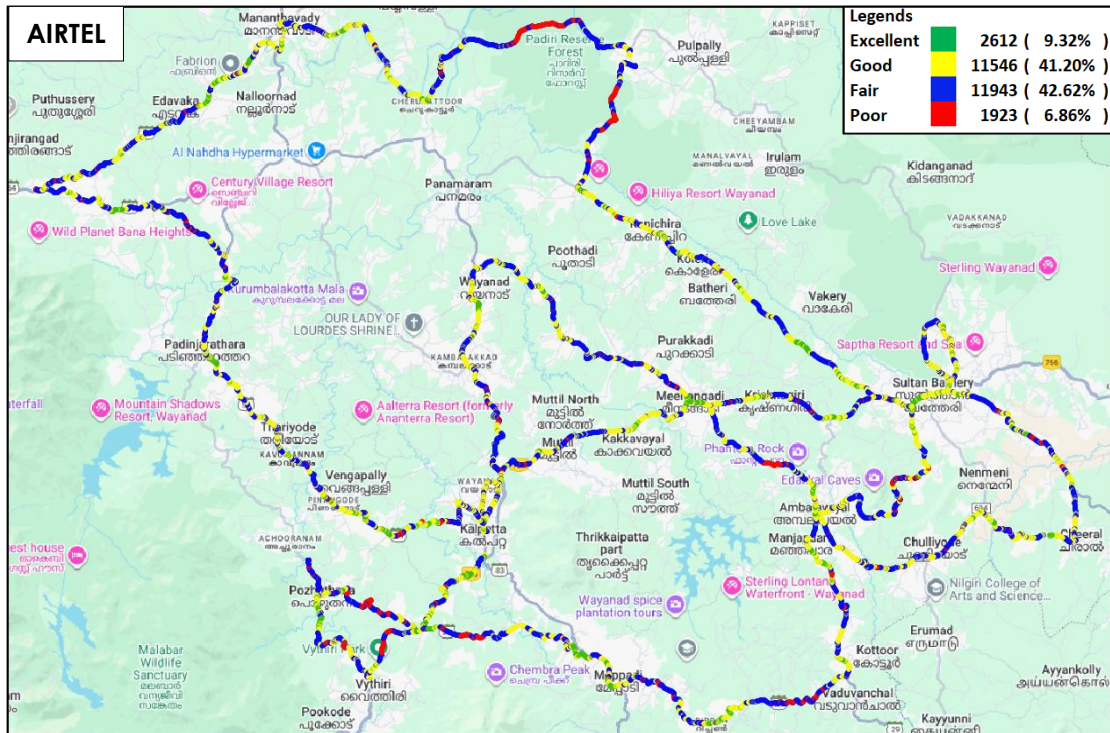


Figure-45: Signal strength auto-selection mode 5G/4G/3G/2G – AIRTEL.

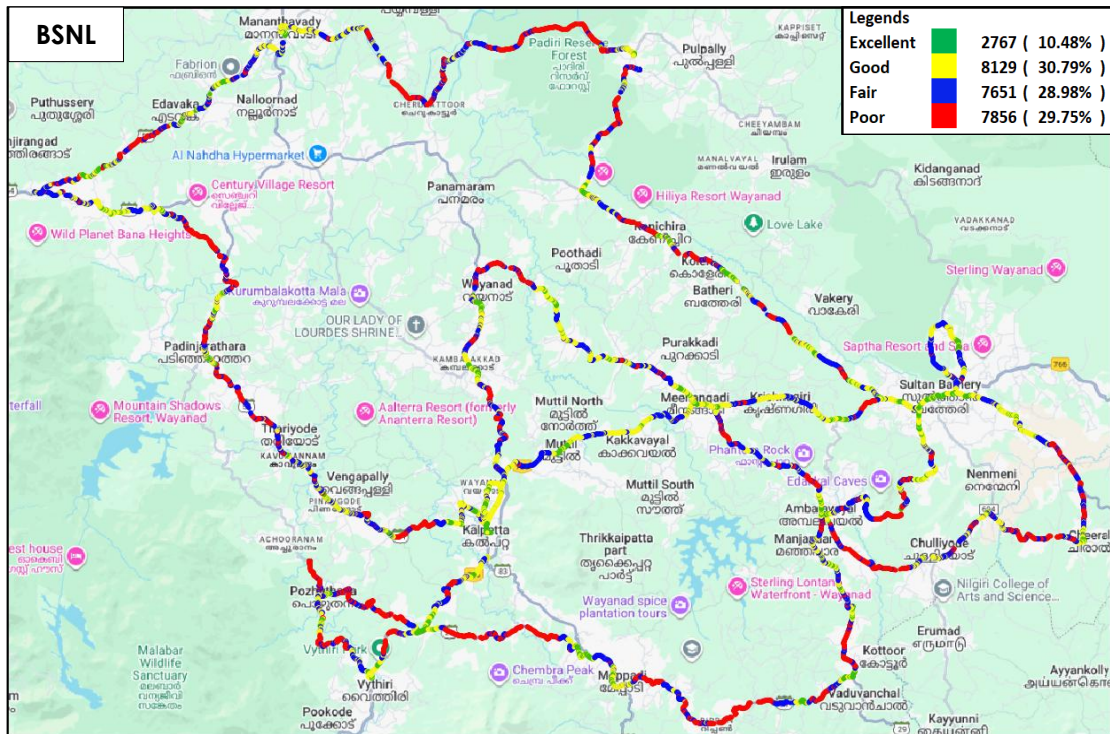


Figure-46: Signal strength auto-selection mode 5G/4G/3G/2G – BSNL.

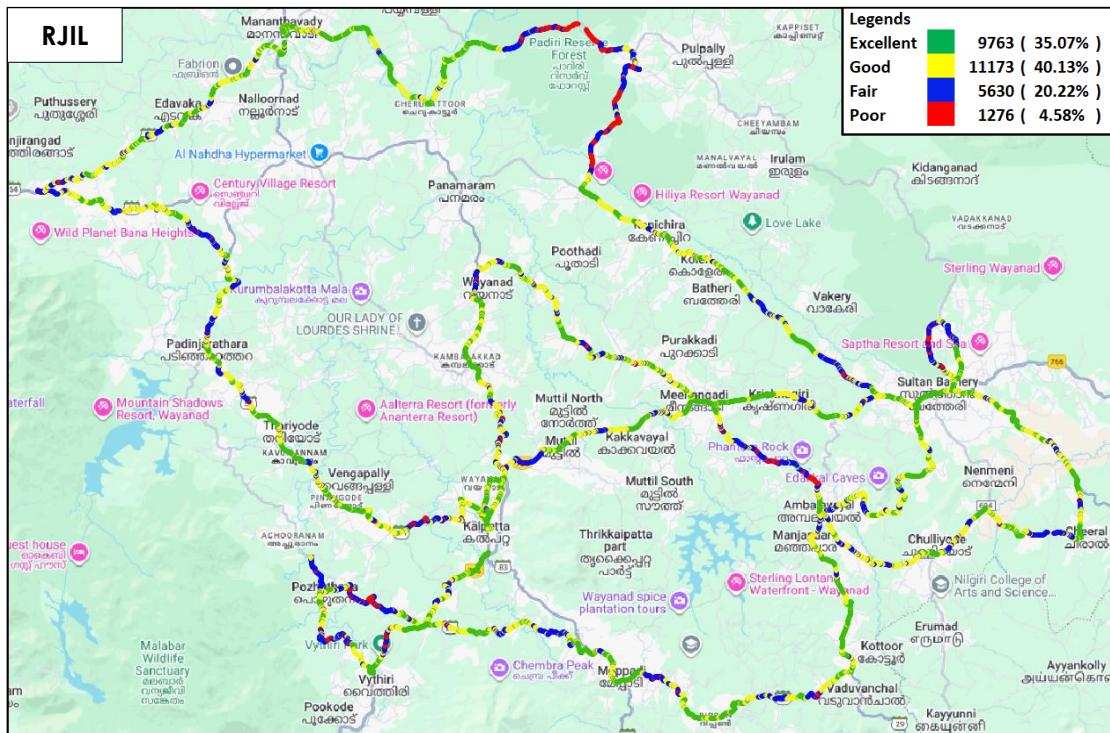


Figure-47: Signal strength auto-selection mode 5G/4G/3G/2G – RJIL.

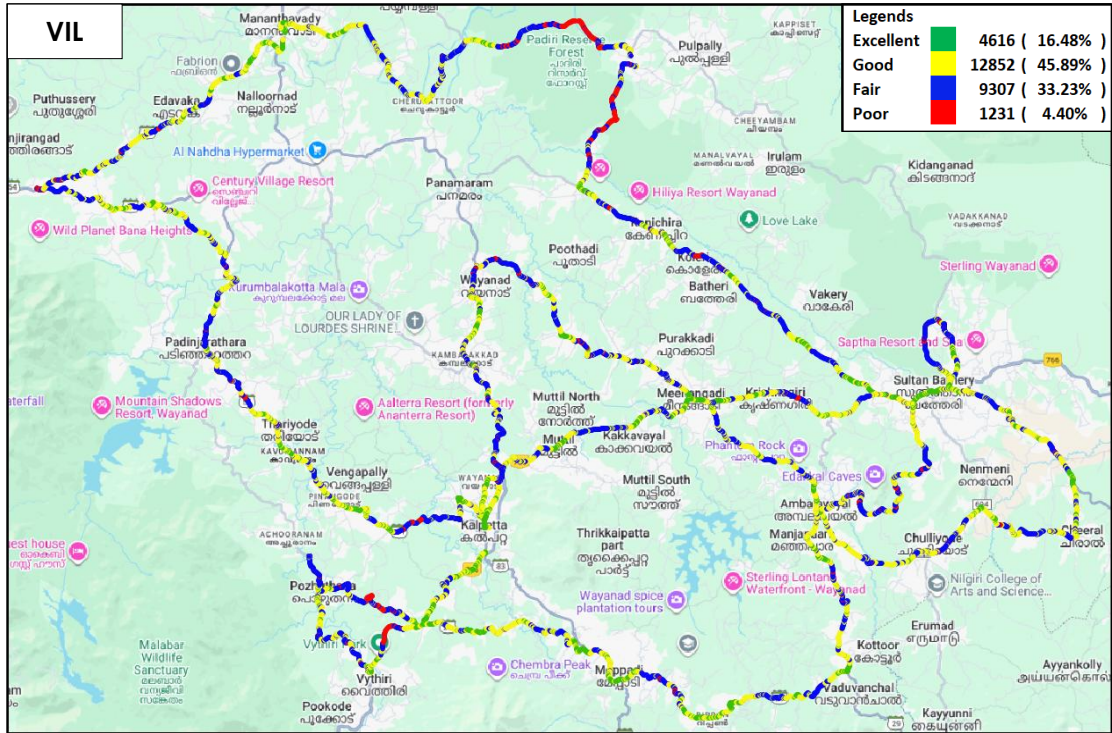


Figure-48: Signal strength auto-selection mode 5G/4G/3G/2G – VIL.

6.1.2 Highway

i) Kalpetta to Bangalore

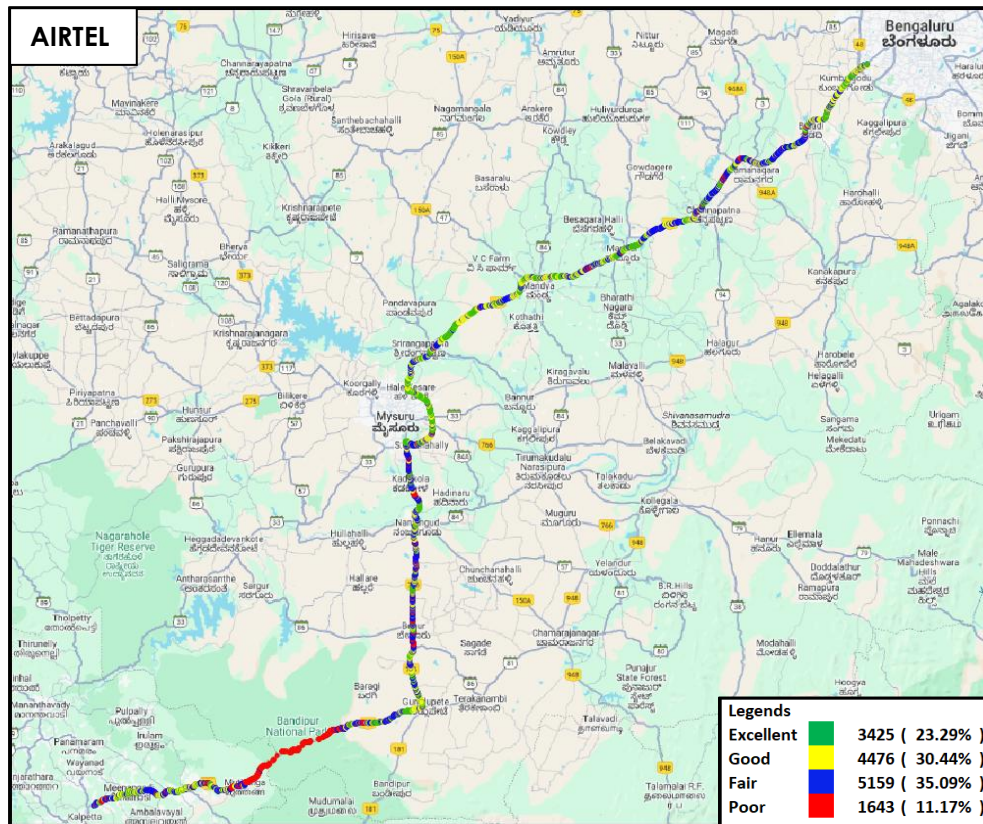


Figure-49: Signal strength 3G/2G network mode – AIRTEL.

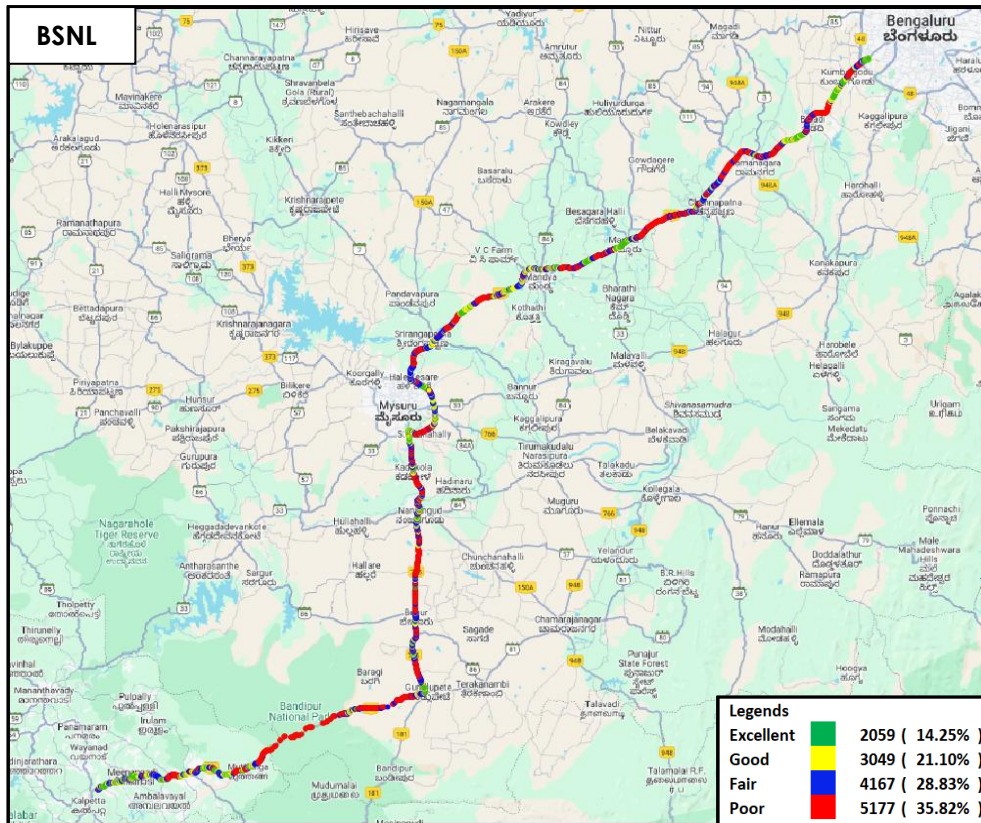


Figure-50: Signal strength 3G/2G network mode – BSNL.

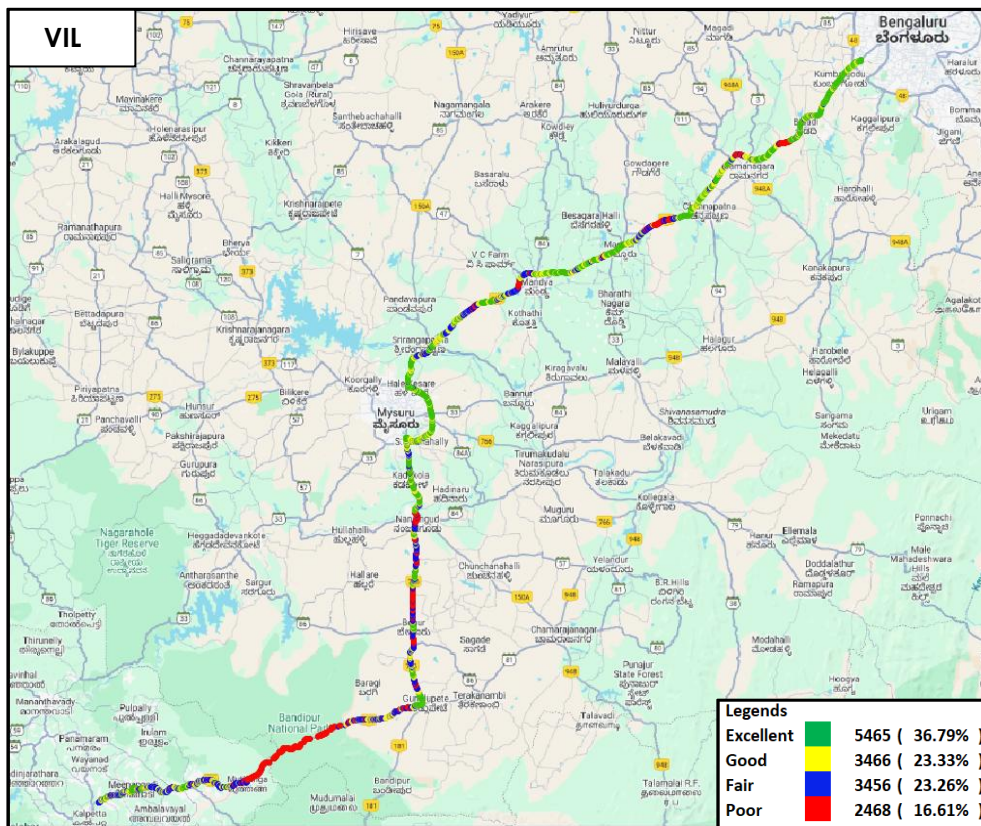


Figure-51: Signal strength 3G/2G network mode – VIL.

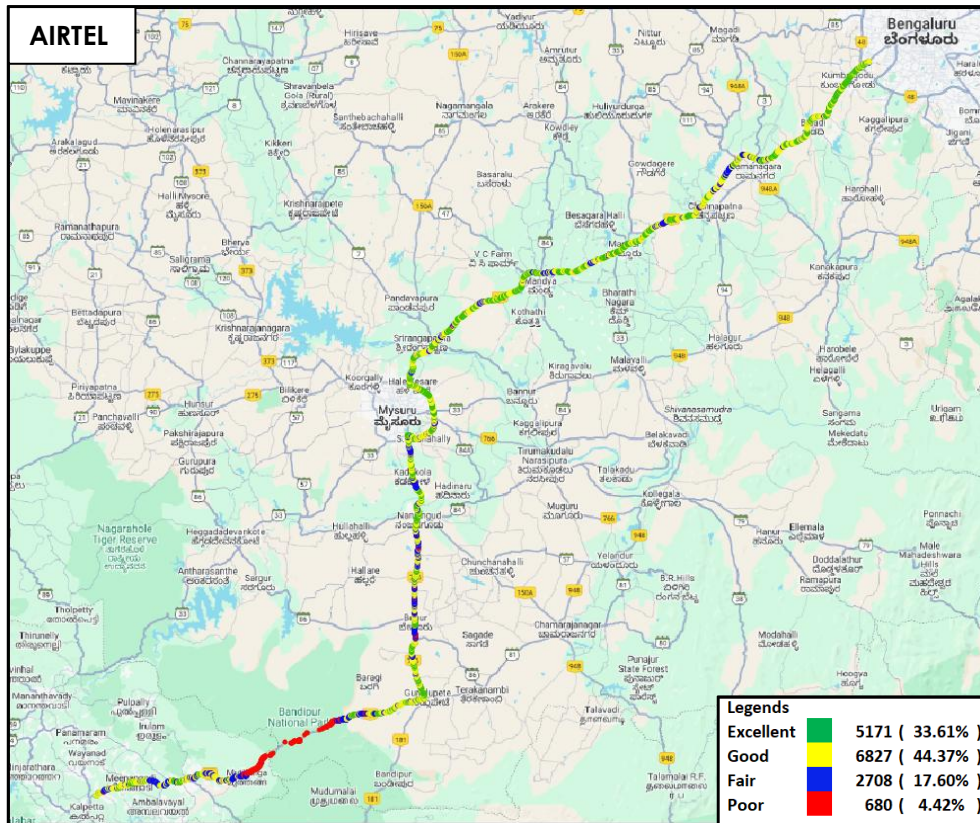


Figure-52: Signal strength auto-selection mode 5G/4G/3G/2G –AIRTEL

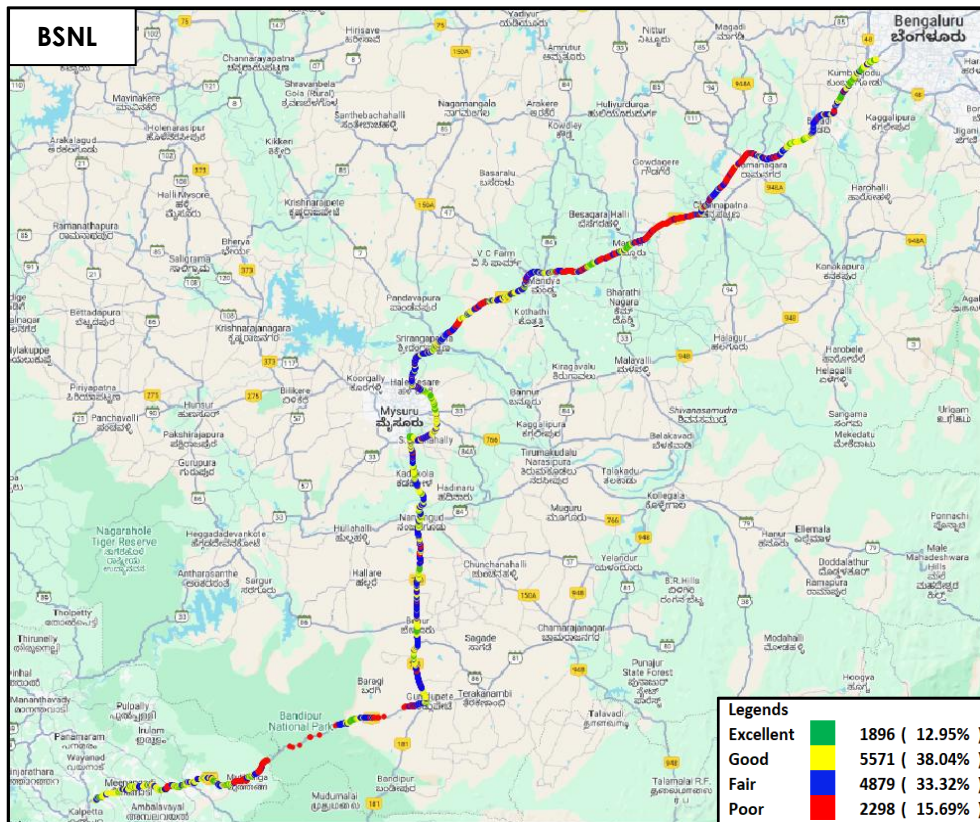


Figure-53: Signal strength auto-selection mode 5G/4G/3G/2G –BSNL.

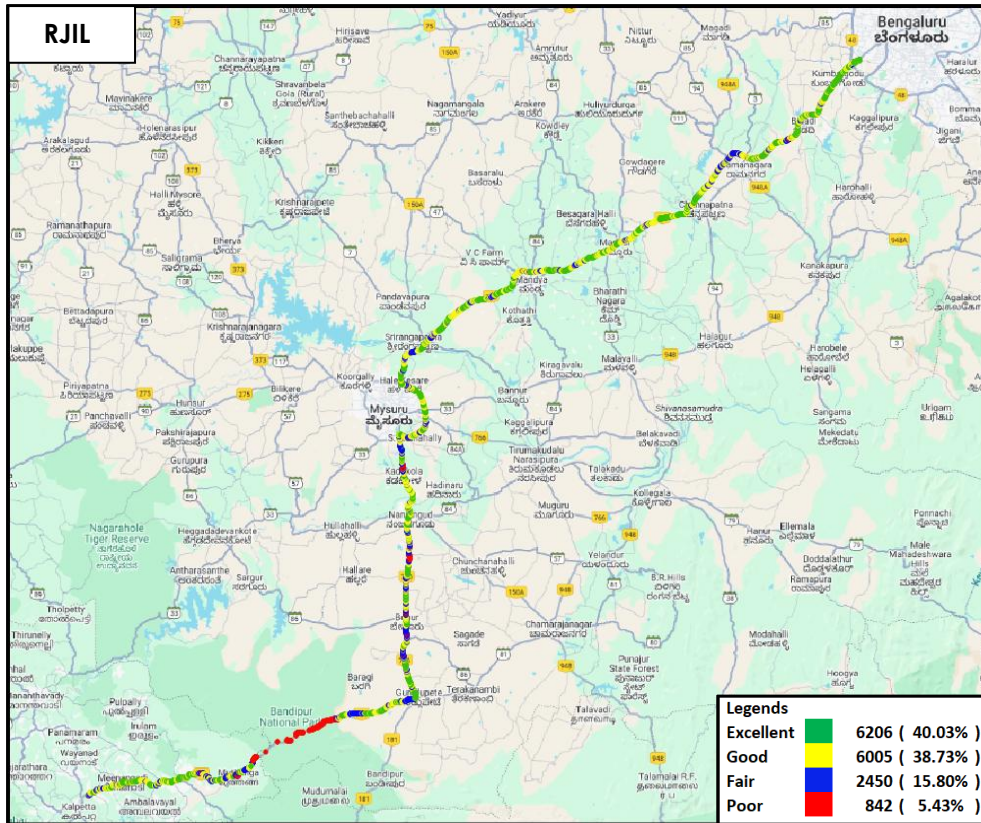


Figure-54: Signal strength auto-selection mode 5G/4G/3G/2G -RJIL

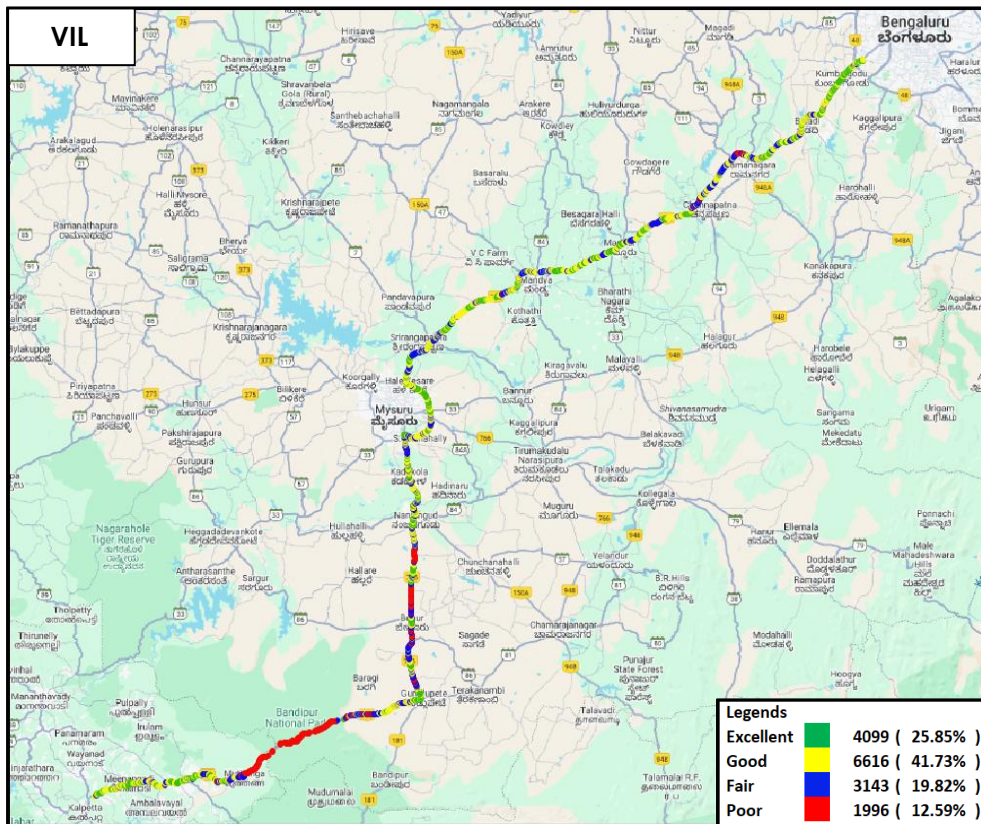


Figure-55: Signal strength auto-selection mode 5G/4G/3G/2G -VIL

7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions may be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

7.1 Appendix-I

7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	• 3G/2G auto mode- switch Call • 5G/4G/3G/2G auto mode- switch Call • 5G/4G MOS Call	30 Sec
Call Duration		90/180 Sec
Wait/ Guard Time		15 Sec

Table-62: Voice test detail

Note-

- There is 15 sec wait time after locking and before starting first call in 3G/2G call.
- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.
- Speech quality (MOS) has been measured only in city drive & highway by making Mobile to Mobile call.
- 180 Sec calls were made only in highway & railway route drive.

Data Test		
Test Type	Technology	Detail
HTTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
HTTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)
Web Browsing		3 popular websites (www.google.co.in , www.irctc.co.in , www.sbi.co.in) 20 sec timeout (only at Hotspot)

Latency & Jitter (TWAMP-UDP)		25 count- Dynamic 500 count- Hotspot Payload- 42 bytes in all drive
Packet Loss Rate (TWAMP-UDP & TCP)		500 counts (TWAMP-UDP) 500 counts (TCP) at each hotspot Payload- 42 bytes in all drive

Table-63: Data test detail

Note-

- 5 Data iteration to be done at each hotspot location.
- Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance.
- TWAMP-UDP & TCP test to be performed only once at hotspot location.
- Youtube & Web browsing test to be performed at static location only.
- All values are taken up to two decimal places with round off.
- Delhi Based TRAI server being used for HTTP download, Upload, TCP & TWAMP for Airtel, BSNL & RJIL while VIL provides own server for respective testing.

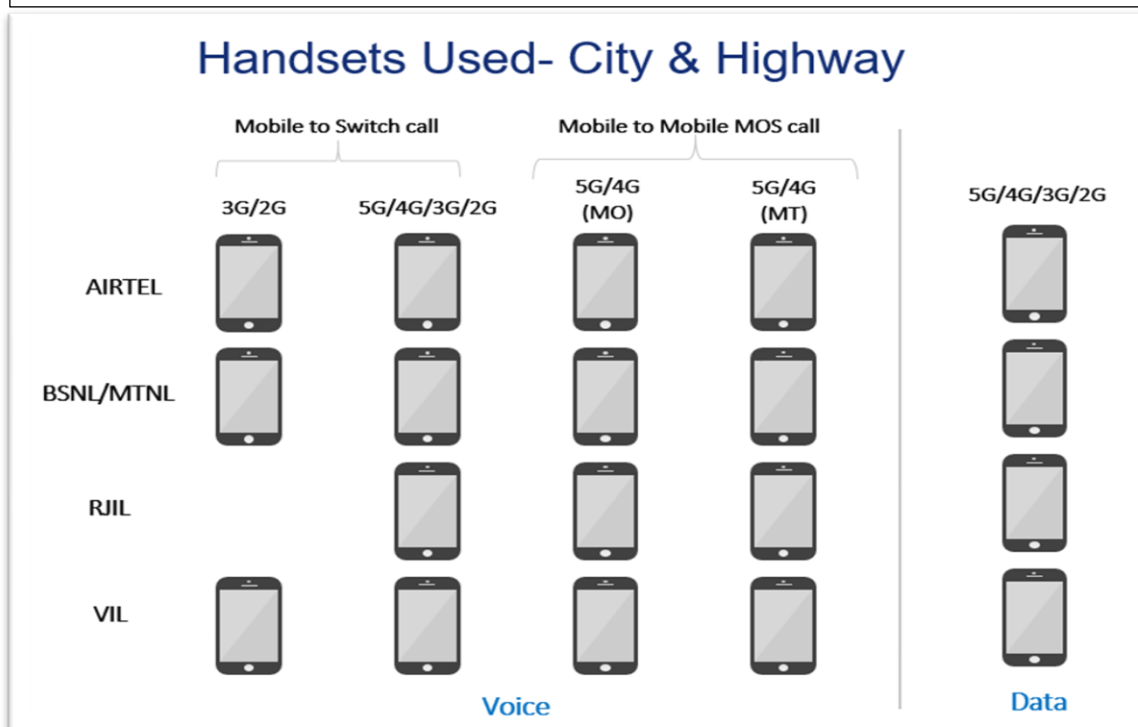


Figure-56: Number of handsets used in city & highway drive

MO: Mobile originating

MT: Mobile terminating

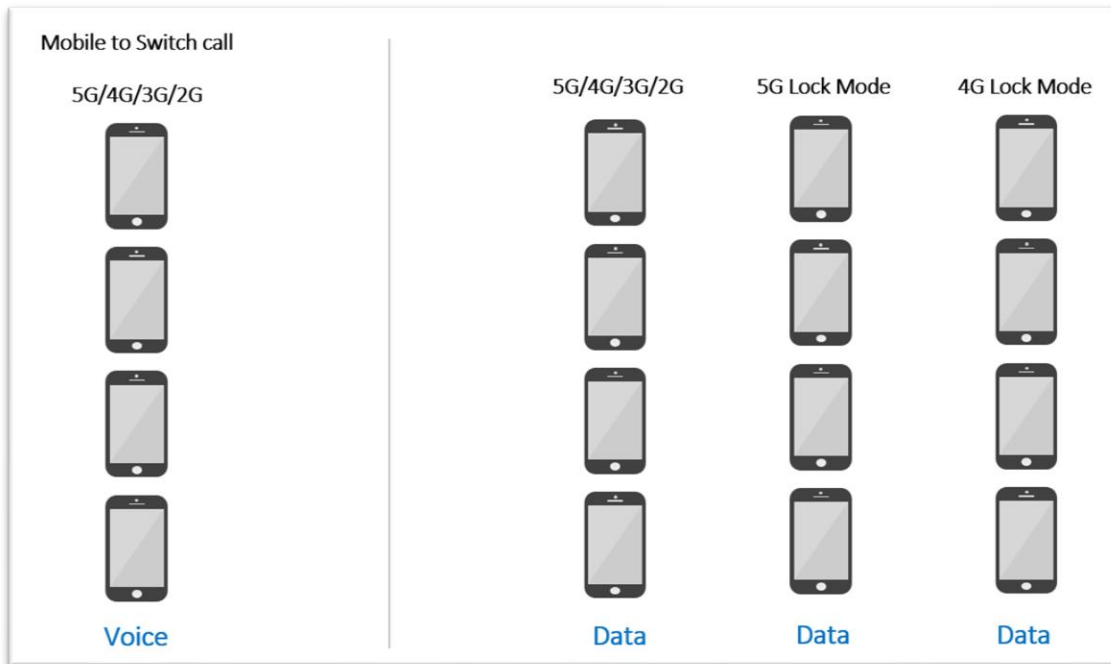


Figure-57: Number of handsets used in railway/metro/walktest/hotspot/coastal area

Note- 5G & 4G Lock mode testing has been performed at hotspot locations only.

7.1.2 Drive test Methodology

(a) Dynamic voice testing (on the move)

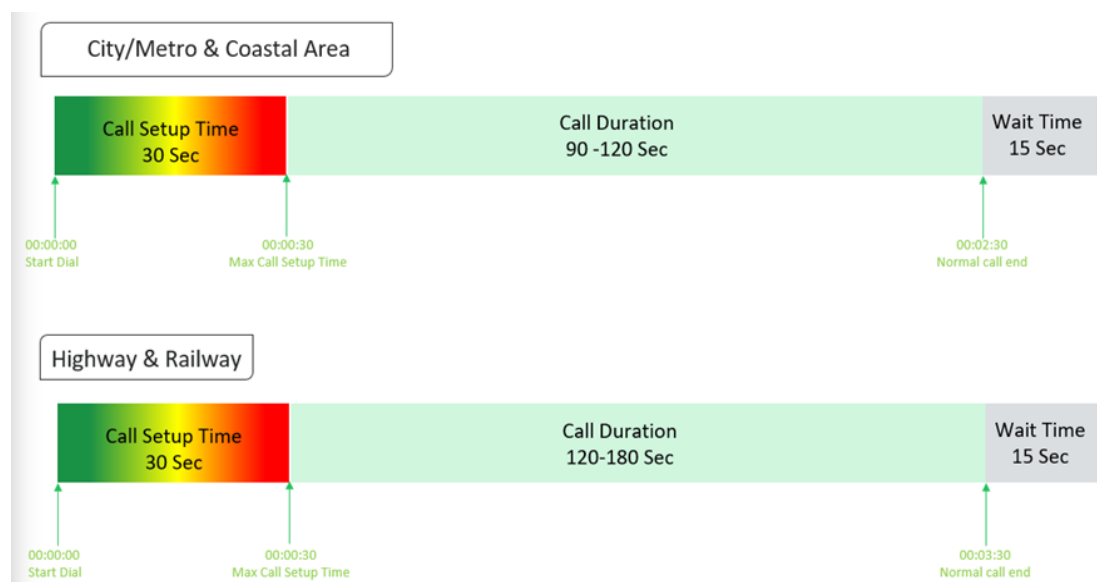


Figure-58: Voice test script for city/railway/metro/highway & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.
- Speech quality (MOS) will be measured only City & Highway drive by making Mobile to Mobile calls.

(b) Hotspot voice testing



Figure-59: Voice test script for walktest/hotspot

- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.

(c) Dynamic Data (internet) test

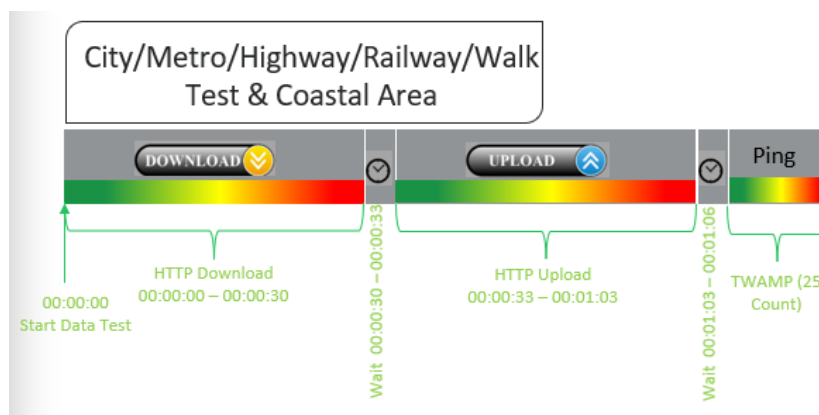


Figure-60: Data test script used in city/metro/railway/highway/walk test & coastal area

(d) Static Data(internet) testing

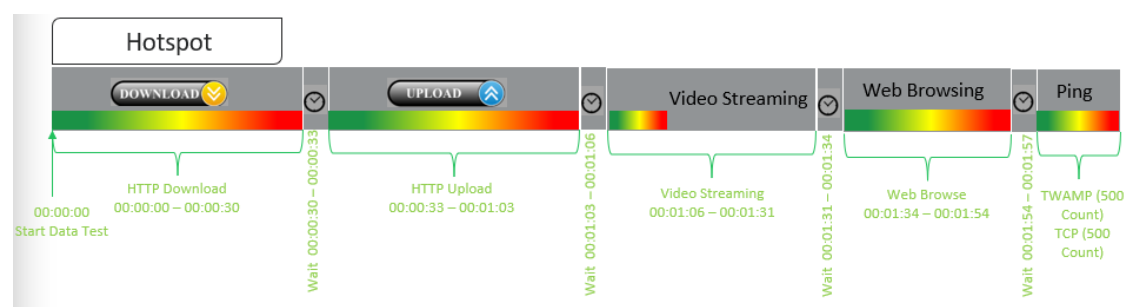


Figure-61: Data test script used at hotspot

- 5 Data iteration done at each hotspot location
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- One ping iteration (with 500 Count of each- TWAMP & TCP) done at hotspot location.

7.2 Appendix-II

7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
Call Setup Success Rate	(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup: (a) Call attempt is made (b) The signaling channel is allocated (c) The call is routed to the outwards path of the terminating network (d) An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement. CSSR = (Total Call Established/ Total Call Attempt) *100 As per QoS Regulation 2024 benchmark value is >=98%
Drop Call Rate	Call drop represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network Drop Call Rate = (Total Call Drop/Total Call Established) *100 As per QoS Regulation 2024 benchmark value is <=2%
Call Setup Time	Time taken from call initiate to call alerting/ringing. Call Setup Time = T2- T1 T2- Ringing (VoLTE/VoNR) & Alerting (for WCDMA & GSM), T1- Invite (VoLTE/VoNR) & CM Service Request (for WCDMA & GSM)
Voice Quality (MOS)	Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as: Excellent: MOS ≥ 4 and < 5 Good : MOS ≥ 3 and < 4 Fair : MOS ≥ 2 and < 3 Poor : MOS ≥ 1 and < 2
Handover Success Rate	Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100 Handover type which are considered- 2G Inter & Intra cell, 3G Soft & IRAT, 4G Inter & Intra frequency & SRVCC, 5G Inter & Intra frequency & 5G to 4G handovers.
Silence Call	A call which has ≥ 4 sec continuous RTP gap is considered as a Silence Call. Silence call rate = (count of silence call / Total calls established) *100 If a call observes multiple silence count ≥ 4 sec in a particular established call it has been taken as one silent event.

Jitter	The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If S_i is the RTP timestamp from packet i, and R_i is the time of arrival in RTP timestamps units for packet i, then for two packets i and j the inter-arrival jitter D can be expressed as: $D(i,j) = (R_j - R_i) - (S_j - S_i)$ The interarrival jitter is calculated continuously as each data packet i is received from source $SSRC_n$, using this difference D for that packet and the previous packet $i-1$ in order of arrival (not necessarily in sequence), according to the formula $J(i) = J(i-1) + (D(i-1,i) - J(i-1))/16 \text{ or } 8$																																		
Downlink Packet Drop Rate	Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE)																																		
Uplink Packet Drop Rate	Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).																																		
Signal Strength	Signal strength is the signal power level received by the wireless user. <table><tr><th rowspan="2">Parameter Name</th><th rowspan="2">Technology</th><th colspan="4">Signal Strength (dBm)</th></tr><tr><th>Excellent</th><th>Good</th><th>Fair</th><th>Poor</th></tr><tr><td>Rx Level</td><td>GSM</td><td>0 to ≥ -65</td><td><-65 to ≥ -75</td><td><-75 to ≥ -85</td><td><-85 to min</td></tr><tr><td>RSCP</td><td>WCDMA</td><td>0 to ≥ -70</td><td><-70 to ≥ -80</td><td><-80 to ≥ -90</td><td><-90 to min</td></tr><tr><td>RSRP</td><td>LTE</td><td>0 to ≥ -80</td><td><-80 to ≥ -95</td><td><-95 to ≥ -110</td><td><-110 to min</td></tr><tr><td>SS_RSRP</td><td>NR</td><td>0 to ≥ -80</td><td><-80 to ≥ -95</td><td><-95 to ≥ -110</td><td><-110 to min</td></tr></table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to ≥ -65	<-65 to ≥ -75	<-75 to ≥ -85	<-85 to min	RSCP	WCDMA	0 to ≥ -70	<-70 to ≥ -80	<-80 to ≥ -90	<-90 to min	RSRP	LTE	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min	SS_RSRP	NR	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to ≥ -65	<-65 to ≥ -75	<-75 to ≥ -85	<-85 to min																														
RSCP	WCDMA	0 to ≥ -70	<-70 to ≥ -80	<-80 to ≥ -90	<-90 to min																														
RSRP	LTE	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min																														
SS_RSRP	NR	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min																														

Table-64: Network performance parameter and definition voice

7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
Download Speed (Mbps)	The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device. Download Speed = Total bytes transferred during download / Total time for transfer 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for download throughput in dynamic drive and Hotspot combine data
Upload Speed (Mbps)	The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server. Upload Speed = Total bytes transferred during upload / Total time for transfer. 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for upload throughput in dynamic drive and Hotspot combine data.
Download Session Setup Success Rate	(total download session established (successfully connected to server)/ total download session attempt) *100. This KPI has been calculated for Hotspot only.

Upload Session Setup Success Rate	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
Web Page Download Time	Web browsing test is used to measure performance in terms of opening a web/HTTP page. Time taken to open the web page successfully is considered as web browsing delay/web page download time.
Video Streaming Delay	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
Latency (TWAMP-UDP)	Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again. The Latency is measured in milliseconds (ms). To calculate the one-way latency we just do half of the round-trip time. 50th percentile of one-way latency has been reported.
Jitter (TWAMP-UDP)	Measure of variation in time in arrival of packets from a source to destination The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL $IPDV(i) = D(i) - D(i-1)$ then Stdvs of IPDV is considered as jitter.
Packet Loss Rate (TWAMP-UDP & TCP)	Number of packets lost out of total packet transferred during test. Packet loss rate = (Total packet lost / Total packet sent) *100 * Packet delay (using TWAMP-UDP & TCP) >90 ms considered as packet loss and included in packet loss rate. * Packet loss rate is calculated based on TWAMP-UDP & TCP. *90th percentile for Packet loss rate has been reported in overall Hotspot performance summary.

Table-65: Network performance parameter and definition Data

Disclaimer: The observations presented above and, in the reports, represent the performance of the service providers on the area/route under test on the day/time of conducting the drive test and no inference whatsoever may be drawn regarding the quality of the telecom service by the service providers in the whole city/state/licensed service area.