



TELECOM REGULATORY AUTHORITY OF INDIA

Independent Drive Test Report

Delhi LSA

April 2026

Contents

- 1. Introduction 3
- 2. Executive Summary (LSA) 3
 - 2.1 Drive test details 3
 - 2.2 Drive test routes 4
 - 2.3 Summary of areas covered 4
 - 2.4 Telecom service providers detected frequency bands 5
 - 2.5 Performance against key QoS parameters 5
- 3. QoS performance analysis-LSA level 7
 - 3.1 Overview 8
 - 3.2 Voice performance 8
 - 3.3 Data performance 11
- 4. Detailed QoS performance analysis 13
 - 4.1 Overview 13
 - 4.2 City 13
 - 4.2.1 Drive test route 13
 - 4.2.2 Areas covered 13
 - 4.2.3 Voice performance 13
 - 4.2.4 Data performance 22
 - 4.3 Hotspots 26
 - 4.3.1 Locations 26
 - 4.3.2 Hotspot covered 26
 - 4.3.3 Voice performance 26
 - 4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G) 29
 - 4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed) 34
 - 4.4 Walk Test 37
 - 4.4.1 Walk test locations 37
 - 4.4.2 Walk Test Covered 37
 - 4.4.3 Voice Performance 37
 - 4.4.4 Data Performance 38
 - 4.5 Airport Route 39
 - 4.5.1 Drive test route 39
 - 4.5.2 Routes Covered 39
 - 4.5.3 Voice performance 39
 - 4.5.4 Data performance 45

- 5. Voice & Data Key findings 49
 - 5.1 Overall Voice..... 49
 - 5.2 Overall Data 49
 - 5.3 Operator wise Key Findings 50
- 6. Annexure 54
 - 6.1 Route wise coverage map 54
 - 6.1.1 City 54
 - 6.1.2 Airport Route 59
- 7. Appendix 63
 - 7.1 Appendix-I 63
 - 7.1.1 Drive test setup 63
 - 7.1.2 Drive test Methodology 65
 - 7.2 Appendix-II 67
 - 7.2.1 Network Performance Parameters for Voice calls 67
 - 7.2.2 Network Performance Parameters Data tests 68

1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet the required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interests of the consumers of telecommunications services.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

2. Executive Summary (LSA)

2.1 Drive test details

This report covers the findings of the IDT undertaken in Delhi License Service Area (LSA) during the month of April-2026 under the supervision of TRAI Regional Office (RO) Delhi. Details of route/area covered during the IDT are as given below:

S. No	Drive test route	Type of route	Distance covered (KMs)	From date	To date
1	North Delhi and nearby areas	City	374.2	13-April-2026	15-April-2026
2	North Delhi and nearby areas	Inter Operator Calling	1 Location	17-April-2026	17-April-2026
3	North Delhi and nearby areas	Hotspot	13 Locations	16-April-2026	17-April-2026
4	North Delhi and nearby areas	Walk test	7.0	16-April-2026	17-April-2026
5	Noida Sector 121 to IGI Airport	Airport route	57.8	15-April-2026	15-April-2026

Table-1: Drive test summary

2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, Inter-operator call test, hotspots, walk test and airport route as per the legends shown on the map.

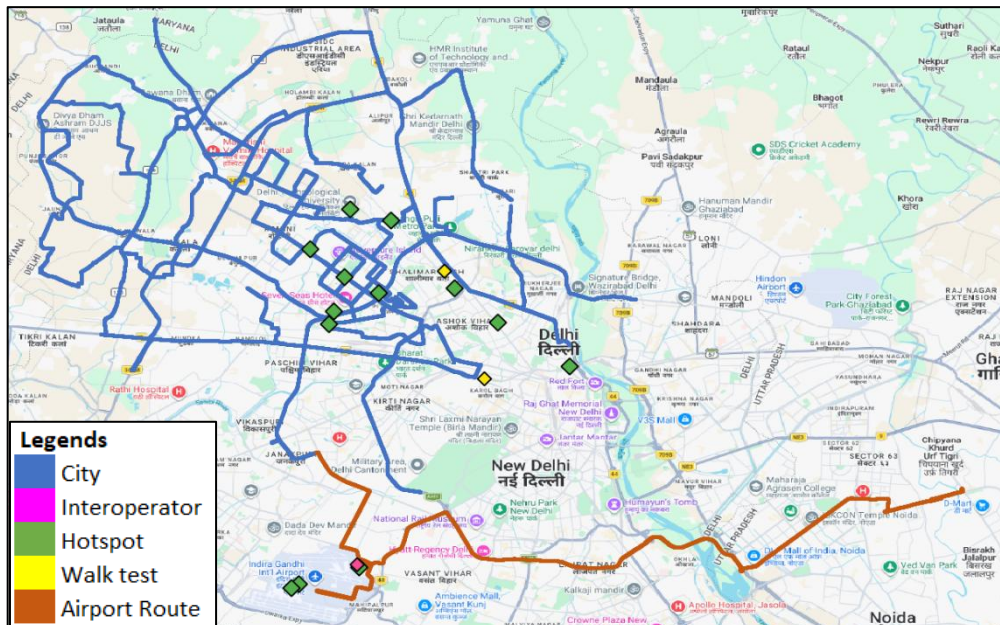


Figure-1: Drive test routes

2.3 Summary of areas covered

a) City- Jaunti, Kanjhawala, Bawana, Bakoli, Alipur, Rohini, Karala, Shastri Park, Burari, Shalimar Bagh, Mukherjee Nagar, Wazirabad, Ashok Nagar, Paschim Vihar and Janakpuri etc.

b) Hotspot

1. Bal Bharti Public School Pitampura
2. Delhi Technological University Daulatpur Delhi
3. District Court Rohini
4. Fortis Hospital Shalimar Bagh
5. Gurudwara Nanak Piao Sahib Near Model Town Metro Station
6. IGI Airport Terminal 1
7. IGI Airport Terminal 2
8. IGI Airport Terminal 3
9. ISBT Kashmere Gate
10. Iskcon Temple Rohini
11. Jaipur Golden Hospital Rohini
12. Rohini West Metro Station
13. Samaypur Badli Metro Station

c) Walk Test

1. Azadpur Mandi
2. Delhi Sarai Rohilla Railway Station

d) Airport Route- Noida Sector 121 to IGI Airport.

2.4 Telecom service providers detected frequency bands


Technologies covered during the IDT and frequency bands in use are summarised in table below:

S.no.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	900,1800
2	Bharti Airtel Ltd.	4G	850,900,1800,2100,2300
3	Bharti Airtel Ltd.	5G	3500
4	MTNL	2G	900, 1800
5	MTNL	3G	2100
6	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
7	Reliance JIO Infocomm Ltd.	5G	700,3500
8	Vodafone Idea Ltd.	2G	900,1800
9	Vodafone Idea Ltd.	4G	900,1800,2100,2500
10	Vodafone Idea Ltd.	5G	3500

Table-2: Telecom service provider (TSP) covered in IDT

2.5 Performance against key QoS parameters

CSSR: Call Setup Success Rate (in %), CST: Call Setup Time (in seconds), DCR: Drop Call Rate (in %) & MOS: Mean Opinion Score.

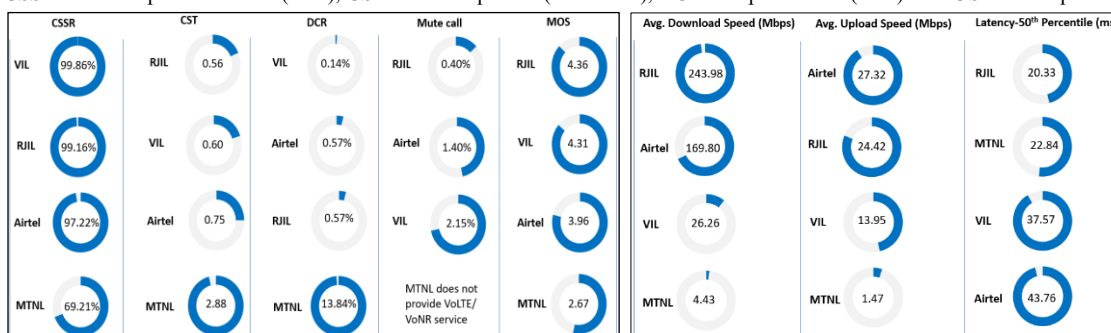

Summary-Voice services

Call Setup Success Rate: Airtel, MTNL, RJIL and VIL have 97.22%, 69.21%, 99.16% and 99.86% call setup success rate respectively in Auto-selection mode (5G/4G/3G/2G).

Call Setup Time: Airtel, MTNL, RJIL and VIL have call setup time of 0.75, 2.88, 0.56 and 0.60 seconds respectively in Auto-selection mode (5G/4G/3G/2G).

Drop Call Rate: Airtel, MTNL, RJIL and VIL have drop call rate of 0.57%, 13.84%, 0.57% and 0.14% seconds respectively in Auto-selection mode (5G/4G/3G/2G).

Call Silence/Mute Rate: Airtel, RJIL and VIL have silence call rate of 1.40%, 0.40%, and 2.15% respectively in packet switched network (4G/5G).

Mean Opinion Score (MOS): Airtel, MTNL, RJIL and VIL have average MOS of 3.96, 2.67, 4.36 and 4.31 respectively.

Summary-Data services

Data Download performance (Overall): Average download speed of Airtel (5G/4G/2G) is 169.80 Mbps, MTNL (3G/2G) is 4.43 Mbps, RJIL (5G/4G) is 243.98 Mbps and VIL (5G/4G) is 26.26 Mbps.

Data Upload performance (Overall): Average upload speed of Airtel (5G/4G/2G) is 27.32 Mbps, MTNL (3G/2G) is 1.47 Mbps, RJIL (5G/4G) is 24.42 Mbps and VIL (5G/4G) is 13.95 Mbps.

Latency (Overall): Airtel, MTNL, RJIL and VIL 50th percentile latency is 43.76 ms, 22.84 ms, 20.33 ms & 37.57 ms respectively.

Data performance - Hotspots (in Mbps):

Airtel- 4G D/L: 24.01 4G U/L: 5.67
 5G D/L: 214.02 5G U/L: 30.21
 RJIL- 4G D/L: 31.07 4G U/L: 6.56
 5G D/L: 207.94 5G U/L: 15.85
 VIL- 4G D/L: 16.36 4G U/L: 3.31
 5G D/L: 41.13 5G U/L: 14.97

Note- "D/L" Download speed, "U/L" Upload speed
 4G & 5G technology have not been observed in MTNL

- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **voice** testing has been observed in 1.41%, 71.75%, 1.42% & 0.99% of the **City IDT route** in case of Airtel, MTNL, RJIL and VIL respectively. {refer **figure- 55 to 58** as per the **Section 6.1** under Para-6 (Annexure)}
- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **data** testing has been observed in 6.52%, 74.68%, 4.28% & 3.83% of the **City IDT route** in case of Airtel, MTNL, RJIL and VIL respectively. {refer **figure- 59 to 62** as per the **Section 6.1** under Para-6 (Annexure)}

- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **voice** testing has been observed in 0.41%, 72.48%, 0.15% & 0.57% of the **Airport IDT route** in case of Airtel, MTNL, RJIL and VIL respectively. {refer **figure- 66 to 69** as per the **Section 6.1** under Para-6 (Annexure)}
- The Poor signal strength in auto-selection mode (5G/4G/3G/2G) during **data** testing has been observed in 3.93%, 82.91%, 2.52% & 1.43% of the **Airport IDT route** in case of Airtel, MTNL, RJIL and VIL respectively. {refer **figure- 70 to 73** as per the **Section 6.1** under Para-6 (Annexure)}

QoS Performance Analysis- Delhi LSA

3. QoS performance analysis-LSA level

3.1 Overview

This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the Delhi LSA during the month of April-2026 covering city drive, hotspots, walk test and airport route. (Refer Table 1)

3.2 Voice performance

(a) **Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	MTNL	VIL
Call Attempts	536	662	512
Call Setup Success Rate %	89.55	64.80	95.70
Drop Call Rate %	0.83	11.66	2.45
Call Setup Time-Average (Second)	3.38	2.73	4.05
Handover Success Rate %	96.25	99.92	92.87

Table-3: Summary of voice call performance in 3G/2G network mode only.

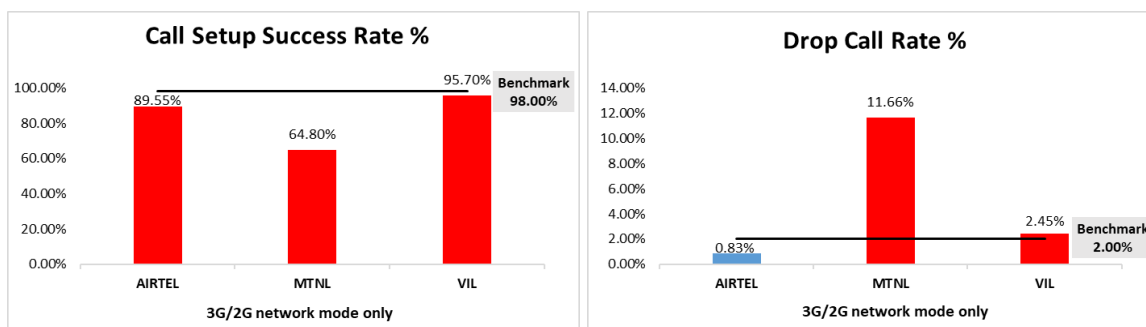


Figure-2: Call setup success rate and drop call rate performance.

Number of unique cell Id's covered in Voice test- Technology wise			
Technology	Service Provider		
	3G/2G network mode only		
	AIRTEL	MTNL	VIL
3G	NA	197	NA
2G	1104	33	1026

Table-4: Technology wise number of network cell Id's latched during drive test.

Note-

- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.

(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempts	719	877	713	708
Call Setup Success Rate %	97.22	69.21	99.16	99.86
Drop Call Rate %	0.57	13.84	0.57	0.14
Call Setup Time-Average (Second)	0.75	2.88	0.56	0.60
Handover Success Rate %	99.66	99.93	100.00	99.85

Table-5: Summary of voice call performance in network auto-selection mode.

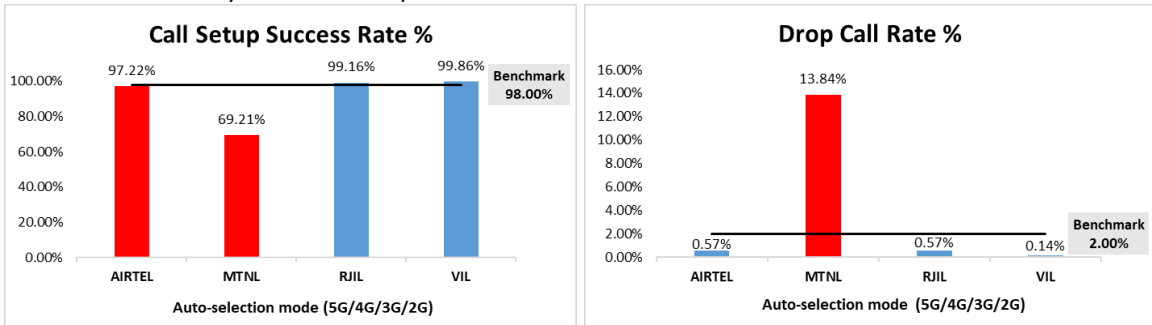


Figure-3: Performance for call setup success rate and drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	MTNL	RJIL	VIL
Call Established (within service provider Network)	499	404	498	511
Number of silences call for >4 Sec	7	NA	2	11
Silence Call Rate %	1.40	NA	0.40	2.15
Number of silence instances for >4 Sec	7	NA	2	11
Number of silence instances for >3 Sec	14	NA	10	29
Number of silence instances for >2 sec	26	NA	38	109
RTP Jitter (4G & 5G) in ms	4.46	NA	16.47	17.22
Packet loss Rate Downlink %	0.54	NA	1.86	1.67
Packet loss Rate Uplink %	0.62	NA	1.88	1.51

Table-6: Summary of silence instances & packet loss rate for mobile to mobile calls.

Note-
<ul style="list-style-type: none"> NA- Due to unavailability of packet switched (VoLTE & VoNR) network in MTNL silence instances are not captured.

Number of unique cell Id's covered in Voice test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
5G	0	NA	1584	0
4G	2711	NA	565	2297
3G	NA	202	NA	NA
2G	0	56	NA	5

Note-
<ul style="list-style-type: none"> NA- Service provider doesn't provide services in respective technology. 0- No cell Id's were found in respective technology.

Table-7: Technology wise number of network cell Id's latched during drive test.

(c) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile-to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	MTNL	RJIL	VIL
Total Number of MOS Samples for calls table-6	2905	2106	2890	2957
Speech Quality (Average MOS)	3.96	2.67	4.36	4.31
Number of samples with MOS >=4 to <5 (Excellent)	2286	0	2411	2322
Number of samples with MOS >=3 to <4 (Good)	503	972	262	431
Number of samples with MOS >=2 to <3 (Fair)	58	682	84	124
Number of samples with MOS >=1 to <2 (Poor)	58	452	133	80
%age of samples with MOS >=4 to <5 (Excellent)	78.69%	0.00%	83.43%	78.53%
%age of samples with MOS >=3 to <4 (Good)	17.31%	46.15%	9.07%	14.58%
%age of samples with MOS >=2 to <3 (Fair)	2.00%	32.38%	2.91%	4.19%
%age of samples with MOS >=1 to <2 (Poor)	2.00%	21.46%	4.60%	2.71%

Table-8: Summary of speech quality (MOS) samples.

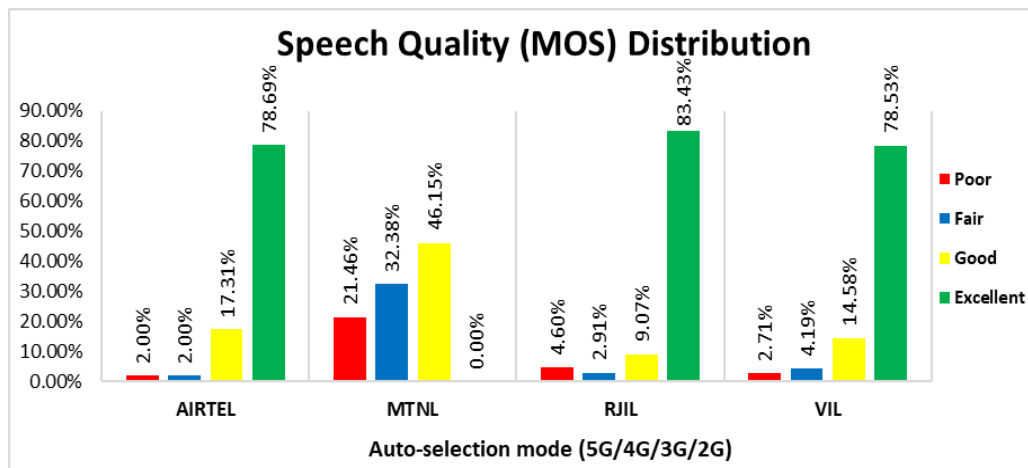


Figure- 4: Distribution of samples in MOS range.

(d) Inter-service provider voice call performance: To check the performance of inter-service providers call setup success rate, total 11 to 16 inter operator calls were attempted at one location which is at the Terminal 1- IGI Airport. The call setup success rate and call setup time observation is as below.

Call Setup Success Rate %				
From Service Provider	To Service Provider			
	AIRTEL	MTNL	RJIL	VIL
AIRTEL	NA	100.00	100.00	100.00
MTNL	92.86	NA	100.00	100.00
RJIL	100.00	100.00	NA	100.00
VIL	100.00	100.00	100.00	NA

Table-9: Call setup success rate across service providers

Note-

- NA- Only inter-operator calls were measured during test.

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	MTNL	RJIL	VIL
AIRTEL	NA	5.20	1.39	1.50
MTNL	4.31	NA	3.54	4.17
RJIL	1.82	4.16	NA	3.24
VIL	1.59	4.08	1.24	NA

Table-10: Call setup time across service providers.

Note-

- NA- Only inter-operator calls were measured during test.

3.3 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	MTNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	169.80	4.43	243.98	26.26
	80th Percentile	257.76	6.88	391.65	42.18
	20th Percentile	65.30	1.98	78.91	9.91
Upload Throughput (Mbits/s)	Average	27.32	1.47	24.42	13.95
	80th Percentile	47.79	2.70	41.42	26.90
	20th Percentile	6.03	0.16	6.87	2.46
Latency (ms)	50th Percentile	43.76	22.84	20.33	37.57

Table-11: Summary of data performance in network auto-selection mode.

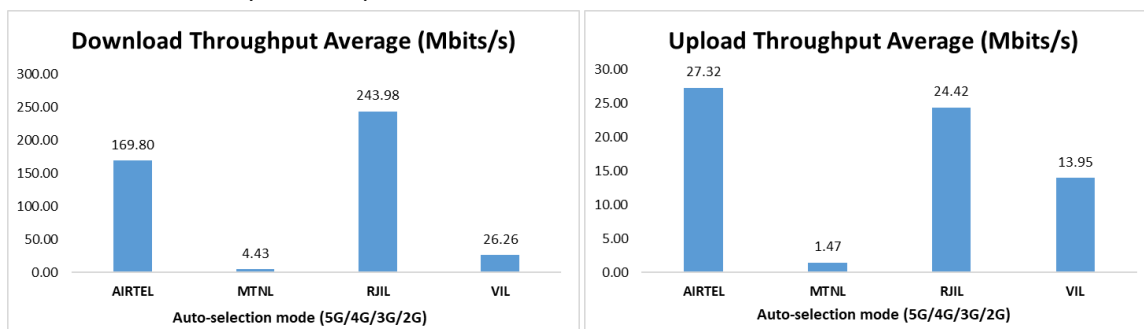


Figure- 5: Download and Upload throughput

Number of unique cell Id's covered in Data test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
5G	0	NA	1316	0
4G	2583	NA	180	1853
3G	NA	233	NA	NA
2G	1	65	NA	0

Table-12: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

Detailed QoS Performance Analysis

4. Detailed QoS performance analysis

4.1 Overview

This section covers analysis on performance of various categories of drives like city, hotspots, walk test and Airport route for all telecom service providers, the results of drive tests conducted are shown individually for respective areas/locations.

4.2 City

Drive test has been conducted from 13th April 2026 to 15th April 2026 in North Delhi and nearby areas. (Refer Table-1)

4.2.1 Drive test route

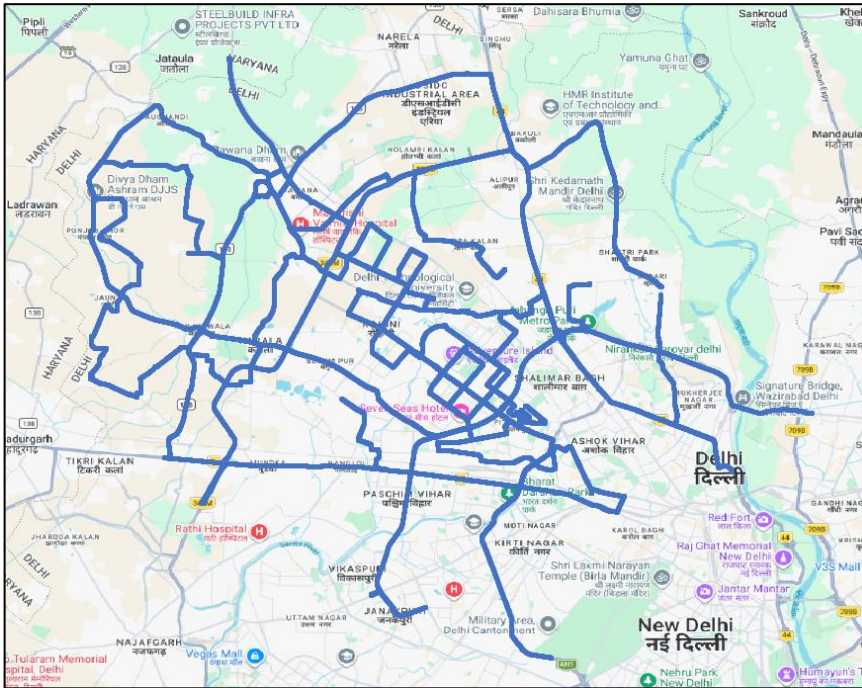


Figure- 6: Drive test routes

4.2.2 Areas covered

Jaunti, Kanjhawala, Bawana, Bakoli, Alipur, Rohini, Karala, Shastri Park, Burari, Shalimar Bagh, Mukherjee Nagar, Wazirabad, Ashok Nagar, Paschim Vihar and Janakpuri etc.

4.2.3 Voice performance

(a) **Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	MTNL	VIL
Call Attempts	472	592	449
Call Setup Success Rate %	88.14	61.99	95.10
Drop Call Rate %	0.72	12.26	2.58
Call Setup Time-Average (Second)	3.40	2.73	4.21
Handover Success Rate %	95.98	99.91	92.30

Table-13: Summary of voice call performance in 3G/2G network mode only.

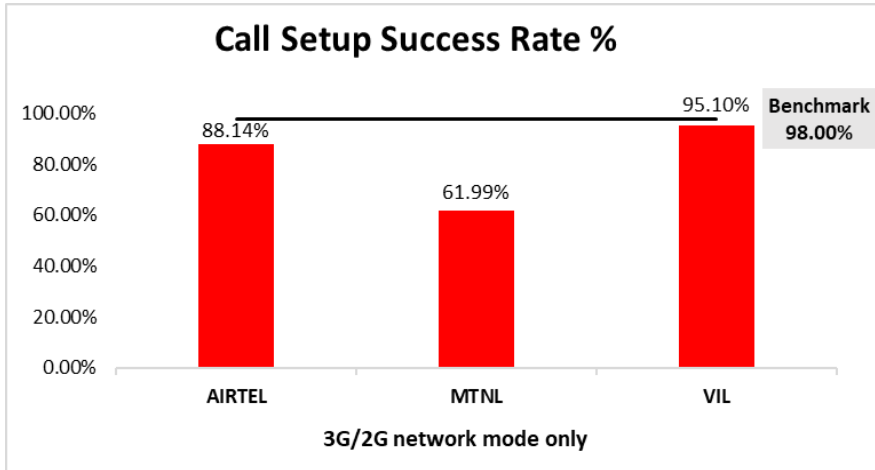


Figure-7: Performance for call setup success rate.

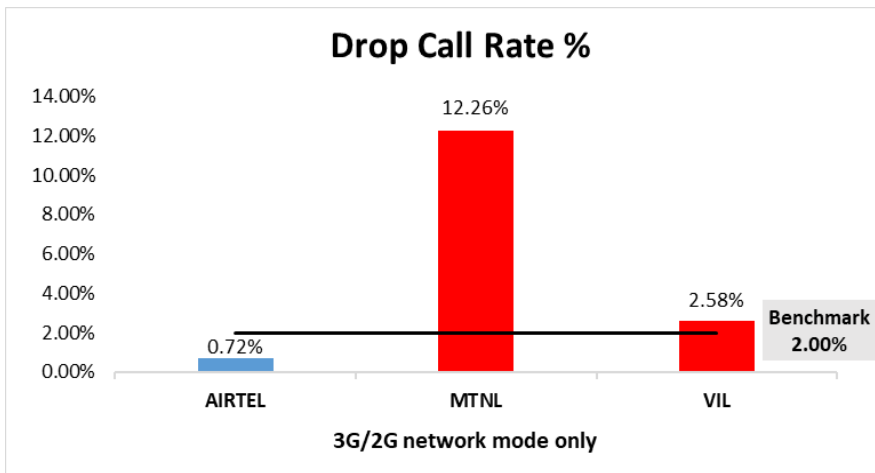


Figure-8: Performance for drop call rate.

(b) Network Technology: This section represent time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	MTNL	VIL
3G	NA	93.27%	NA
2G	99.96%	3.26%	99.67%
Limited Service	0.04%	3.47%	0.33%

Table-14: Time spent on technology during drive test 3G/2G network mode.

Note-

- NA- Service provider doesn't provide services in respective technology.

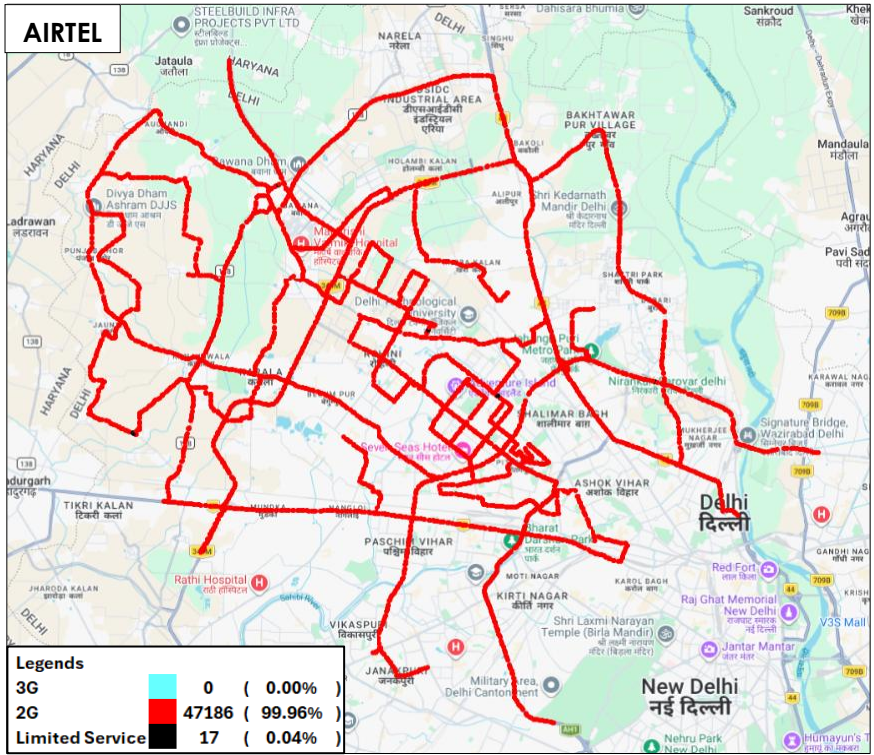


Figure-9: Serving technology plots 3G/2G network mode - AIRTEL

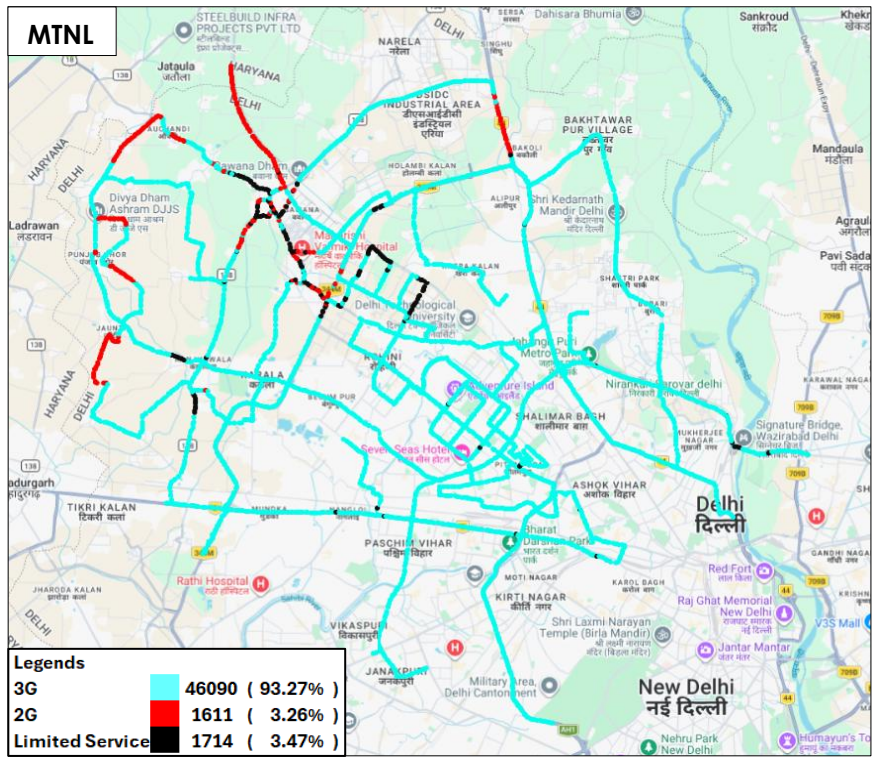


Figure-10: Serving technology plots 3G/2G network mode - MTNL.

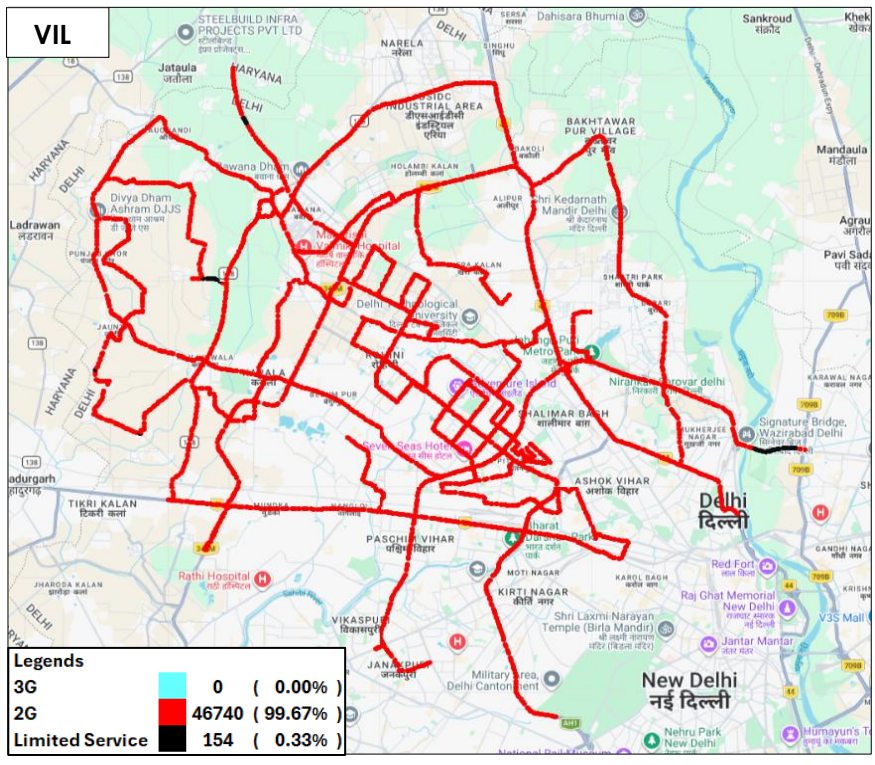


Figure-11: Serving technology plots 3G/2G network mode - VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 52, 53 & 54 for map view)

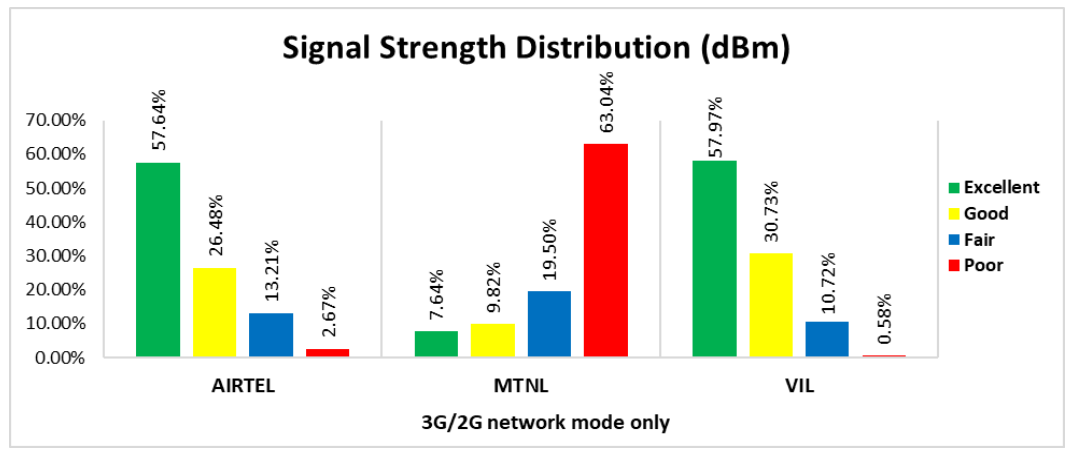


Figure-12: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 58% of samples falling in the excellent signal strength category.
- MTNL has 8% of samples falling in the excellent signal strength category.
- VIL has 58% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempts	472	611	465	460
Call Setup Success Rate %	95.76	59.25	98.71	99.78
Drop Call Rate %	0.66	13.26	0.87	0.00
Call Setup Time Average (Second)	0.77	2.49	0.58	0.60
Handover Success Rate %	99.63	99.89	100.00	99.91

Table-15: Summary of voice call performance in network auto-selection mode.

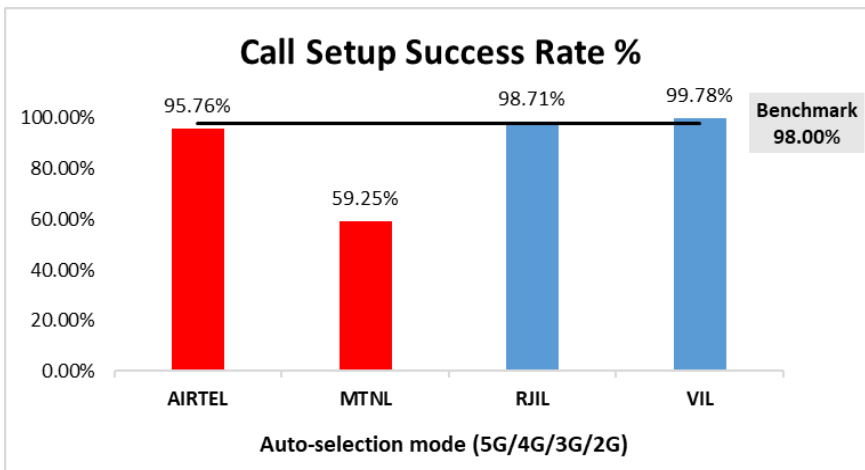


Figure-13: Performance for call setup success rate.

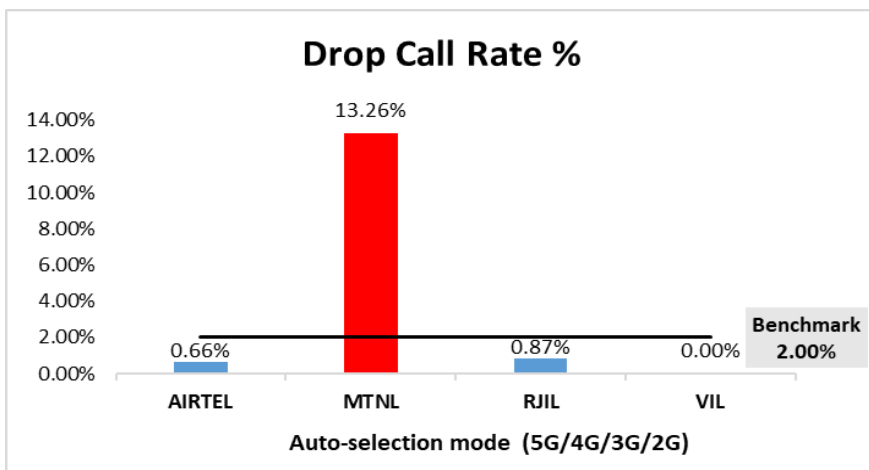


Figure-14: Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	MTNL	RJIL	VIL
Call Established (within service provider Network)	435	351	435	449
Number of silences call for >4 Sec	7	NA	2	9
Silence Call Rate %	1.61	NA	0.46	2.00
Number of silence instances for >4 Sec	7	NA	2	9
Number of silence instances for >3 Sec	14	NA	10	24
Number of silence instances for >2 sec	26	NA	37	97
RTP Jitter (4G & 5G) in ms	4.38	NA	16.52	17.11
Packet loss Rate Downlink %	0.55	NA	2.05	1.76
Packet loss Rate Uplink %	0.61	NA	2.04	1.50

Table-16: Summary of silence instances & packet loss rate for mobile to mobile call.

Note-

- NA- Due to unavailability of packet switched (VoLTE & VoNR) network in MTNL silence instances are not captured.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS value means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	MTNL	RJIL	VIL
Total Number of MOS Samples for calls in table-16	2534	1848	2525	2587
Speech Quality (Average MOS)	3.96	2.68	4.34	4.31
Number of samples with MOS >=4 to <5 (Excellent)	2014	0	2086	2029
Number of samples with MOS >=3 to <4 (Good)	423	870	234	383
Number of samples with MOS >=2 to <3 (Fair)	46	593	75	105
Number of samples with MOS >=1 to <2 (Poor)	51	385	130	70
%age of samples with MOS >=4 to <5 (Excellent)	79.48%	0.00%	82.61%	78.43%
%age of samples with MOS >=3 to <4 (Good)	16.69%	47.08%	9.27%	14.80%
%age of samples with MOS >=2 to <3 (Fair)	1.82%	32.09%	2.97%	4.06%
%age of samples with MOS >=1 to <2 (Poor)	2.01%	20.83%	5.15%	2.71%

Table-17: Summary of speech quality (MOS) samples.

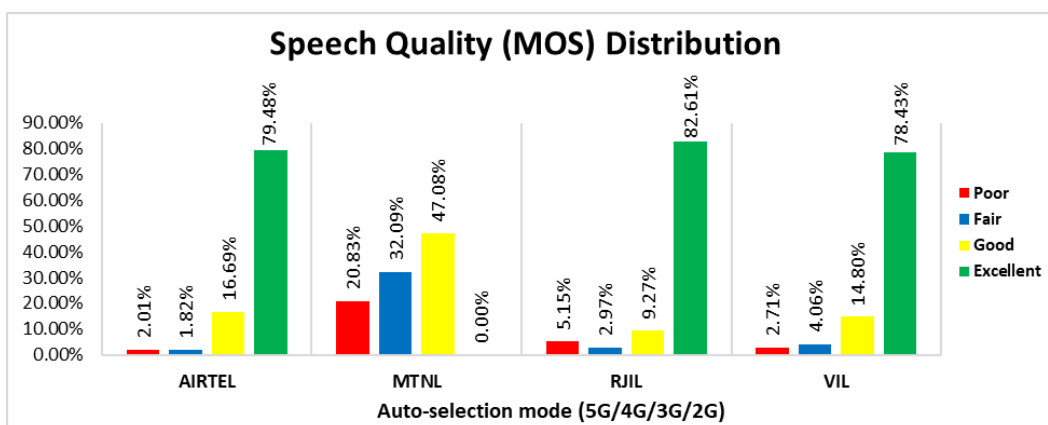


Figure-15: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	MTNL	RJIL	VIL
5G	2.03%	NA	87.99%	0.05%
4G	97.96%	NA	11.98%	99.73%
3G	NA	90.62%	NA	NA
2G	0.00%	5.23%	NA	0.21%
Limited Service	0.01%	4.15%	0.03%	0.01%

Table-18: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice .

Note-

- NA- Service provider doesn't provide services in respective technology.

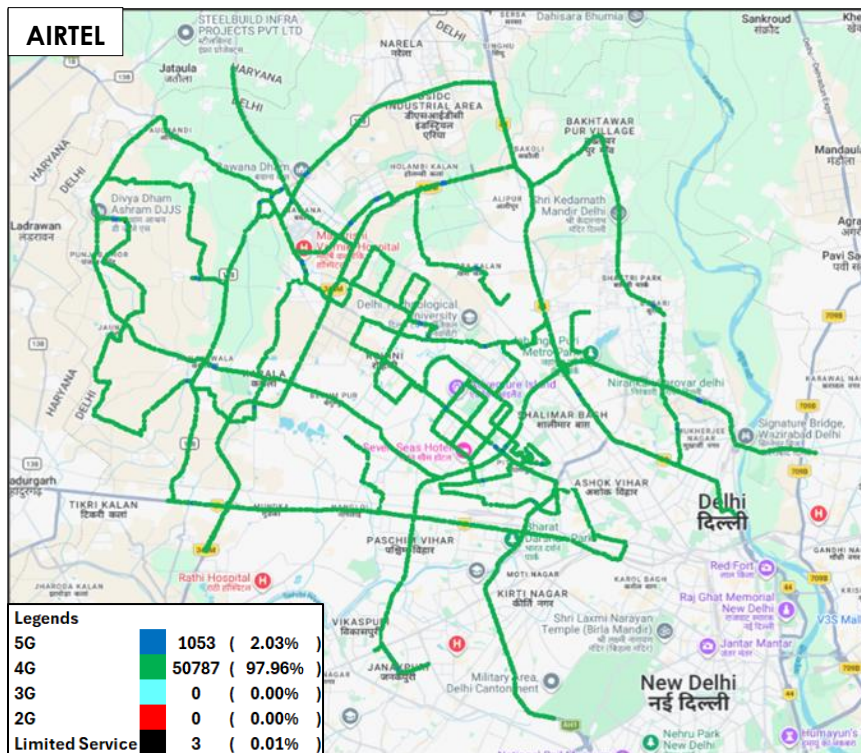


Figure-16: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

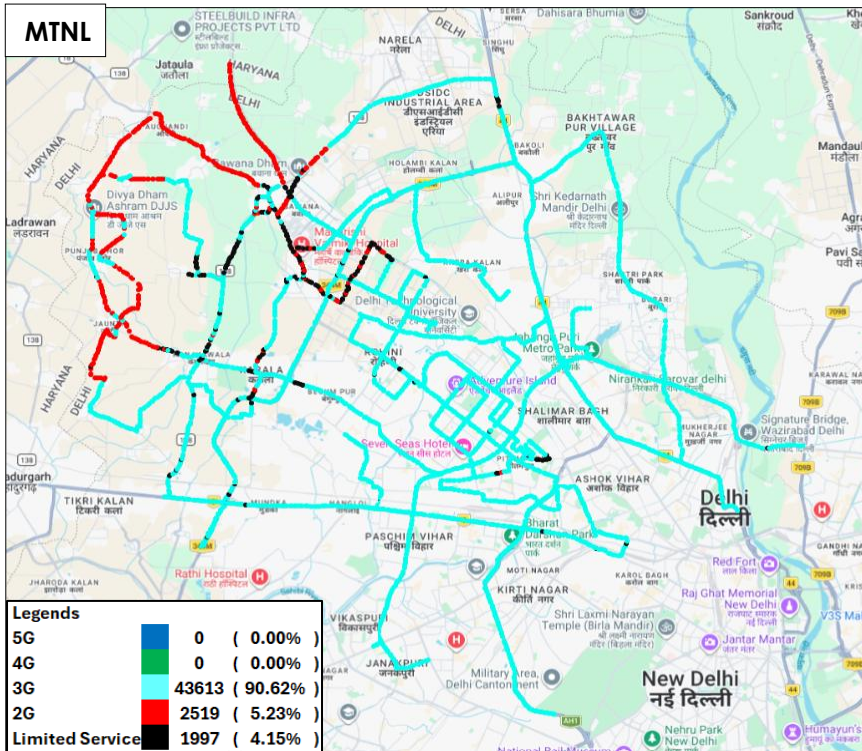


Figure-17: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - MTNL.

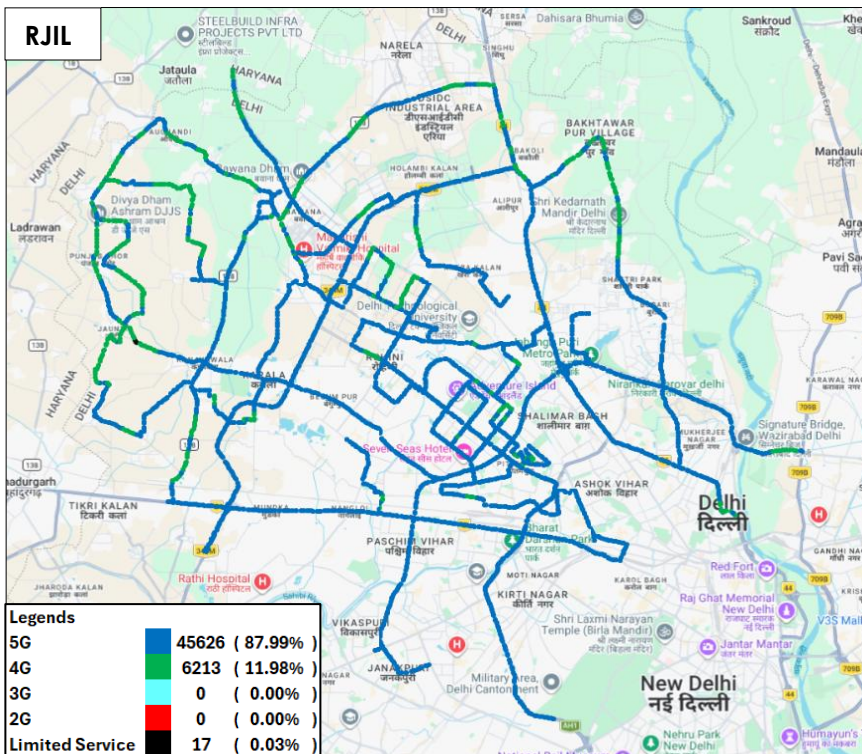


Figure-18: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

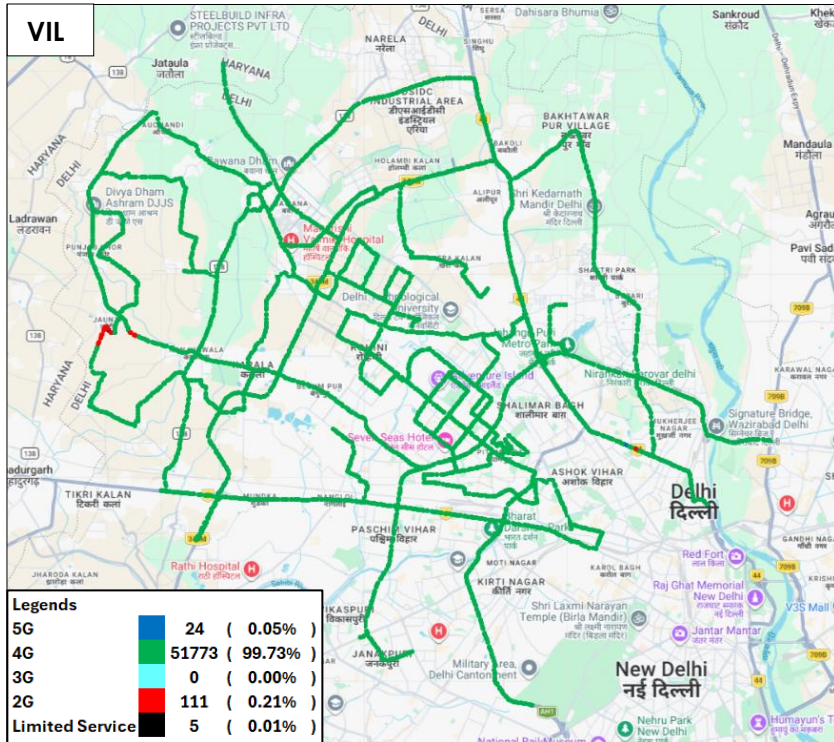


Figure-19: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - VIL.

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) voice. (Refer figure-55, 56, 57 & 58 for map view)

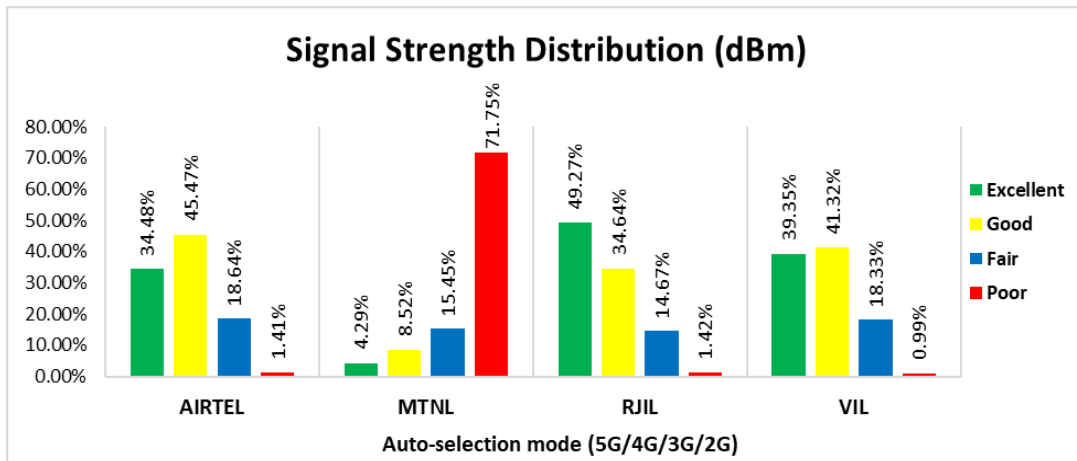


Figure-20: Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

Observations:

- Airtel has 34% of samples falling in the excellent signal strength category.
- MTNL has 4% of samples falling in the excellent signal strength category.
- RJIL has 49% of samples falling in the excellent signal strength category.
- VIL has 39% of samples falling in the excellent signal strength category.

4.2.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	MTNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	178.70	4.25	248.72	23.80
	80th Percentile	265.75	6.39	405.23	38.33
	20th Percentile	79.87	1.97	76.03	8.73
Upload Throughput (Mbits/s)	Average	27.18	1.39	25.67	12.33
	80th Percentile	46.44	2.67	44.81	25.08
	20th Percentile	5.99	0.14	6.31	2.20
Latency (ms)	50th Percentile	41.69	22.46	18.37	38.15

Table-19: Summary of Data performance in network auto-selection mode.

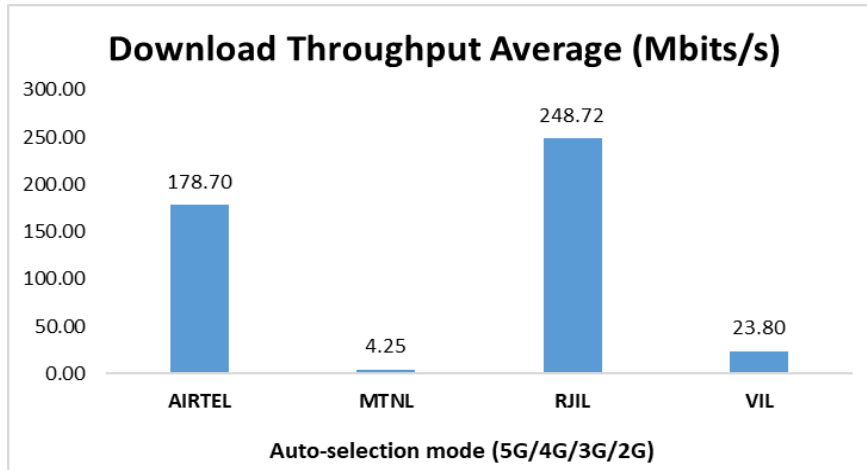


Figure- 21: Download throughput

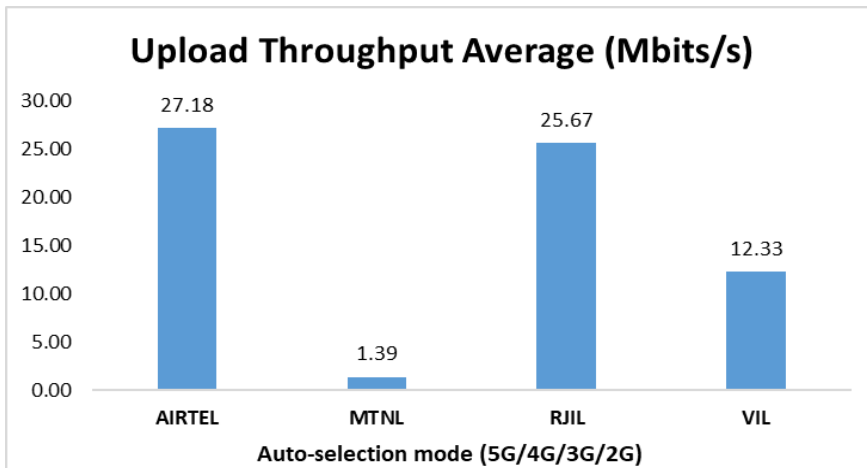


Figure- 22: Upload throughput

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	MTNL	RJIL	VIL
5G	87.04%	NA	96.69%	33.30%
4G	12.85%	NA	3.26%	66.69%
3G	NA	92.54%	NA	NA
2G	0.00%	1.19%	NA	0.00%
Limited Service	0.11%	6.27%	0.05%	0.01%

Table-20: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

Note-

- NA- Service provider doesn't provide services in respective technology.

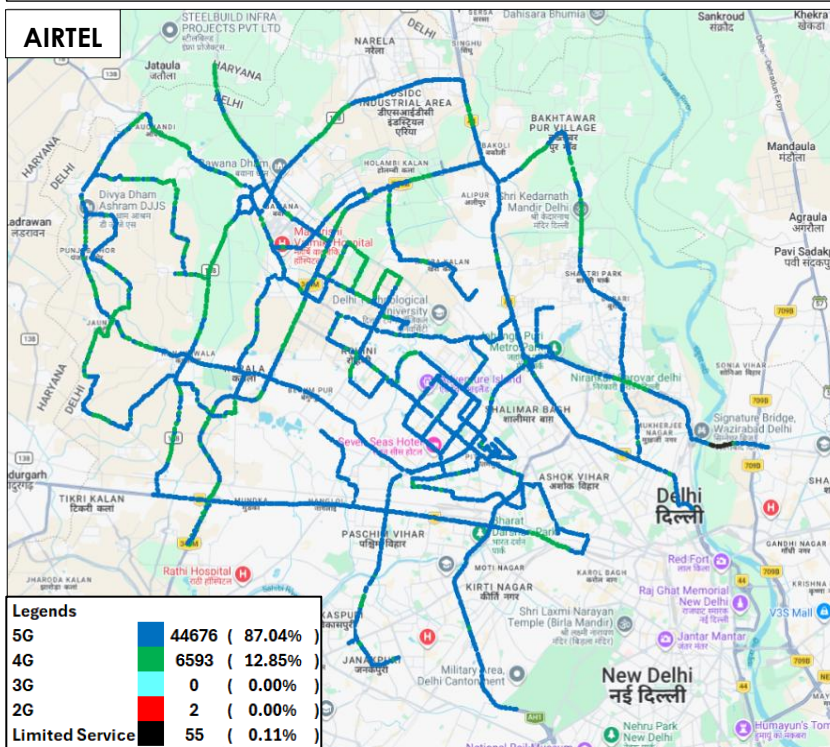


Figure-23: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

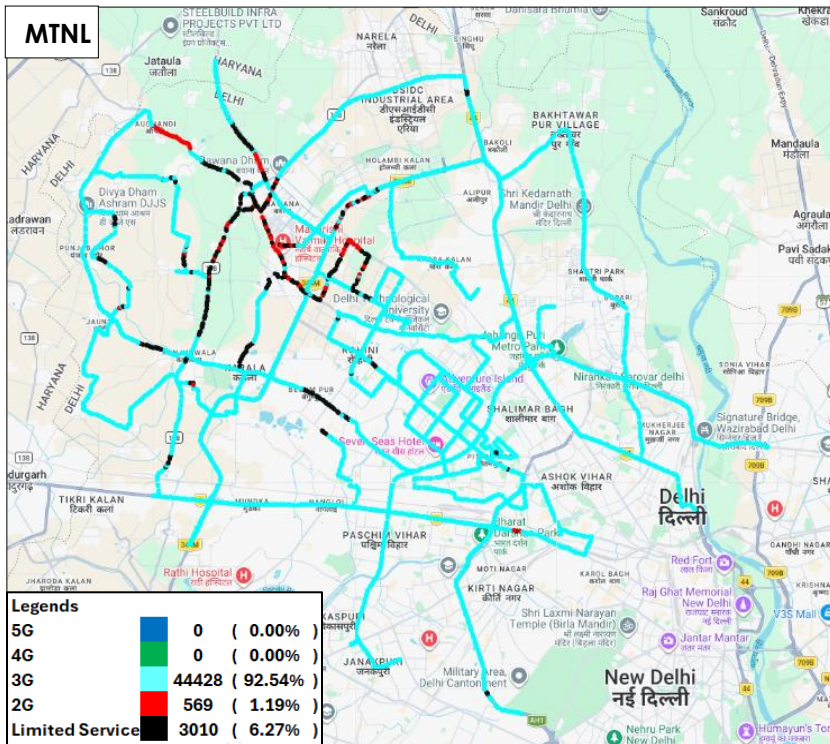


Figure-24: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - MTNL.

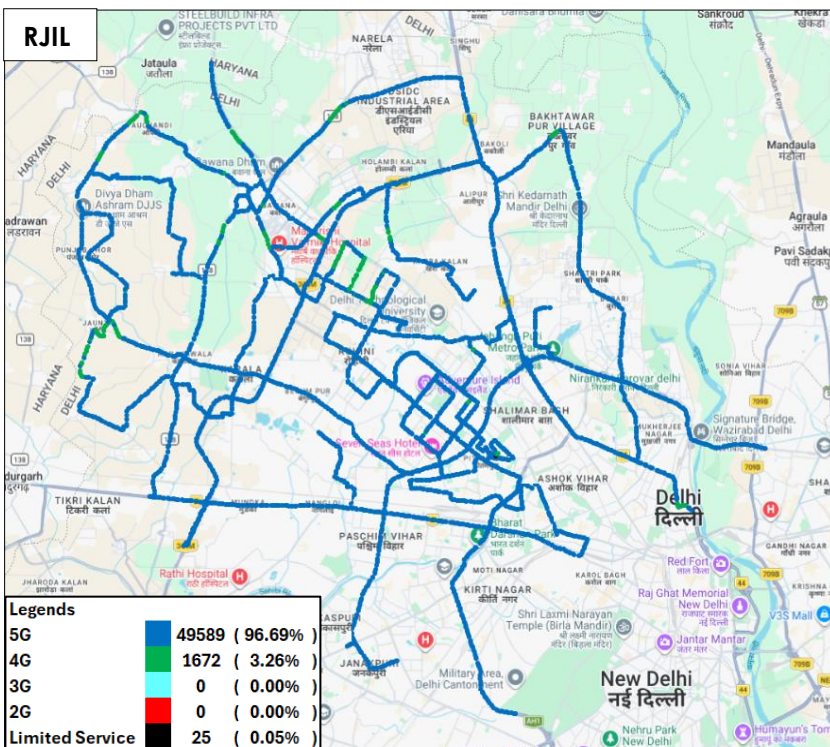


Figure-25: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - RJIL.

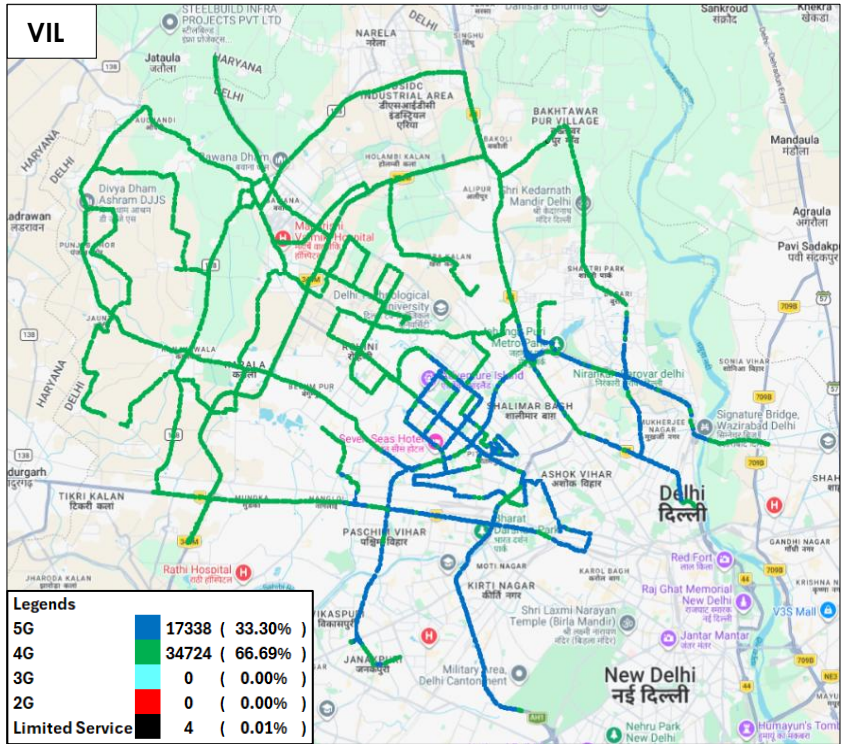


Figure-26: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data- VIL

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-59, 60, 61 & 62 for map view)

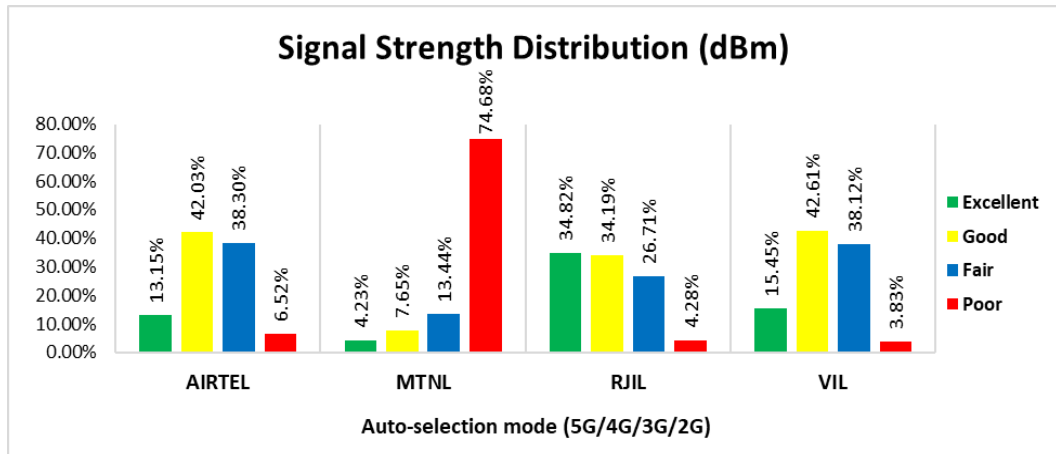


Figure-27: Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

Observations:

- Airtel has 13% of samples falling in the excellent signal strength category.
- MTNL has 4% of samples falling in the excellent signal strength category.
- RJIL has 35% of samples falling in the excellent signal strength category.
- VIL has 15% of samples falling in the excellent signal strength category.

4.3 Hotspots

Hotspot testing has been done on 16th April 2026 & 17th April 2026. Thirteen locations have been tested in the city. (Refer Table-1)

4.3.1 Locations

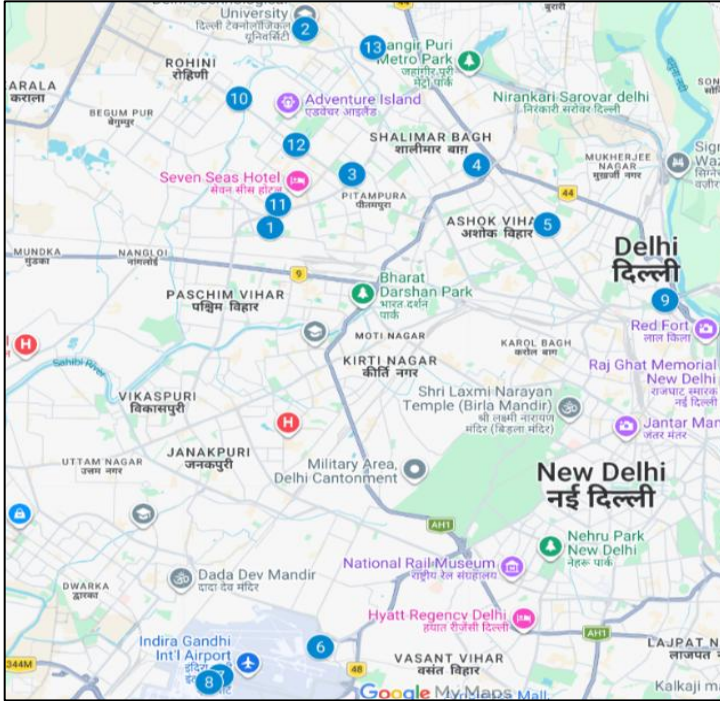


Figure- 28: Hotspot locations

4.3.2 Hotspot covered

1. Bal Bharti Public School Pitampura
2. Delhi Technological University Daulatpur Delhi
3. District Court Rohini
4. Fortis Hospital Shalimar Bagh
5. Gurudwara Nanak Piao Sahib Near Model Town Metro Station
6. IGI Airport Terminal 1
7. IGI Airport Terminal 2
8. IGI Airport Terminal 3
9. ISBT Kashmere Gate
10. Iskcon Temple Rohini
11. Jaipur Golden Hospital Rohini
12. Rohini West Metro Station
13. Samaypur Badli Metro Station

4.3.3 Voice performance

Overall Voice Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	130	130	130	130
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	3.85	0.00	0.00
Call Setup Time-Average (Second)	0.76	2.75	0.51	0.53

Table-21: Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Bal Bharti Public School Pitampura				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.74	1.21	0.42	0.51

Table-22: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Delhi Technological University Daulatpur Delhi				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.70	2.82	0.51	0.55

Table-23: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

District Court Rohini				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	10.00	0.00	0.00
Call Setup Time-Average (Second)	0.70	2.77	0.50	0.48

Table-24: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Fortis Hospital Shalimar Bagh				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.72	2.78	0.45	0.61

Table-25: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Gurudwara Nanak Piao Sahib Near Model Town Metro Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.65	2.60	0.59	0.46

Table-26: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

IGI Airport Terminal 1				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.78	3.21	0.55	0.46

Table-27: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

IGI Airport Terminal 2				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.74	3.06	0.49	0.50

Table-28: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

IGI Airport Terminal 3				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	40.00	0.00	0.00
Call Setup Time-Average (Second)	0.75	3.77	0.59	0.50

Table-29: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

ISBT Kashmere Gate				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.26	2.39	0.48	0.50

Table-30: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Iskcon Temple Rohini				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.66	2.96	0.49	0.55

Table-31: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Jaipur Golden Hospital Rohini				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.80	2.56	0.49	0.63

Table-32: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Rohini West Metro Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.72	3.05	0.52	0.51

Table-33: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Samaypur Badli Metro Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.64	2.57	0.59	0.60

Table-34: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	188.19	4.16	229.92	32.24
Download Throughput 80th Percentile (Mbit/s)	269.35	6.54	356.43	45.29
Download Throughput 20th Percentile (Mbit/s)	71.63	2.19	118.48	14.77
Download Session Setup Success Rate %	100.00	56.92	98.46	92.31
Upload Throughput Average (Mbits/s)	22.71	1.38	15.92	9.04
Upload Throughput 80th Percentile (Mbit/s)	44.86	2.24	21.20	17.10
Upload Throughput 20th Percentile (Mbit/s)	2.98	0.15	5.35	2.44
Upload Session Setup Success Rate %	98.46	67.69	98.46	92.31
Web Browsing Delay (Second)	5.09	3.89	3.39	3.27
Youtube Initial Buffer Delay (Second)	2.03	2.85	0.72	1.15
Latency (ms) - 50th Percentile	45.74	23.84	23.05	36.03
Jitter (ms)	15.82	588.53	8.64	8.79
Packet Loss Rate%	13.09	40.13	1.05	0.78
Packet Loss Rate- 90th percentile	36.80	100.00	3.30	2.50

Table-35: Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Bal Bharti Public School Pitampura				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	35.81	2.83	385.70	38.81
Download Session Setup Success Rate %	100.00	20.00	100.00	100.00
Upload Throughput Average (Mbits/s)	1.78	0.12	55.94	19.37
Upload Session Setup Success Rate %	100.00	80.00	100.00	100.00
Web Browsing Delay (Second)	7.31	-	2.54	4.58
Youtube Initial Buffer Delay (Second)	3.10	-	0.75	0.84
Latency (ms) - 50th Percentile	44.32	-	16.86	33.70
Jitter (ms)	12.58	-	2.76	8.41
Packet Loss Rate%	41.80	100.00	0.00	0.60

Table-36: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "Web Browsing, Youtube & Ping tests were failed.

Delhi Technological University Daulatpur Delhi				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	196.64	2.93	325.34	13.31
Download Session Setup Success Rate %	100.00	100.00	100.00	20.00
Upload Throughput Average (Mbits/s)	14.93	2.08	10.40	1.15
Upload Session Setup Success Rate %	100.00	100.00	100.00	20.00
Web Browsing Delay (Second)	3.65	2.34	3.31	8.86
Youtube Initial Buffer Delay (Second)	0.61	1.57	0.70	-
Latency (ms) - 50th Percentile	55.85	20.93	29.26	35.98
Jitter (ms)	7.33	45.98	8.89	12.73
Packet Loss Rate%	0.70	5.80	0.50	0.30

Table-37: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

District Court Rohini				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	239.57	-	397.03	41.34
Download Session Setup Success Rate %	100.00	0.00	100.00	100.00
Upload Throughput Average (Mbits/s)	41.22	-	16.87	17.74
Upload Session Setup Success Rate %	100.00	0.00	100.00	100.00
Web Browsing Delay (Second)	3.67	-	3.18	1.37
Youtube Initial Buffer Delay (Second)	0.68	-	0.82	1.09
Latency (ms) – 50 th Percentile	37.68	-	29.22	39.07
Jitter (ms)	76.28	-	8.61	5.48
Packet Loss Rate%	8.20	100.00	0.20	0.00

Table-38: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Fortis Hospital Shalimar Bagh				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	123.03	3.20	457.11	36.52
Download Session Setup Success Rate %	100.00	80.00	100.00	100.00
Upload Throughput Average (Mbits/s)	2.49	1.23	22.16	6.75
Upload Session Setup Success Rate %	100.00	60.00	100.00	100.00
Web Browsing Delay (Second)	8.20	2.97	2.89	3.88
Youtube Initial Buffer Delay (Second)	9.80	-	0.56	0.87
Latency (ms) - 50th Percentile	46.74	40.85	14.49	47.52
Jitter (ms)	9.94	10.08	3.57	31.57
Packet Loss Rate%	2.60	0.70	0.00	4.70

Table-39: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube tests were failed.

Gurudwara Nanak Piao Sahib Near Model Town Metro Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	415.81	2.10	132.37	48.20
Download Session Setup Success Rate%	100.00	20.00	100.00	100.00
Upload Throughput Average (Mbits/s)	41.04	0.09	3.17	22.22
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.77	-	3.81	2.76
Youtube Initial Buffer Delay (Second)	0.67	-	1.17	0.79
Latency (ms)- 50th Percentile	48.99	31.8	27.23	34.01
Jitter (ms)	13.05	3615.88	6.92	5.59
Packet Loss Rate%	13.80	26.80	0.00	0.30

Table-40: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-Web Browsing & Youtube tests were failed.

IGI Airport Terminal 1				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	272.51	2.43	277.19	38.37
Download Session Setup Success Rate %	100.00	20.00	100.00	100.00
Upload Throughput Average (Mbits/s)	47.92	0.19	17.14	6.97
Upload Session Setup Success Rate %	100.00	40.00	100.00	100.00
Web Browsing Delay (Second)	5.72	-	3.06	1.38
Youtube Initial Buffer Delay (Second)	1.15	-	0.63	0.70
Latency (ms) – 50th Percentile	66.93	-	18.64	29.52
Jitter (ms)	23.59	-	8.00	3.59
Packet Loss Rate%	27.90	81.80	0.30	0.20

Table-41: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-Web Browsing, Youtube & Ping tests were failed.

IGI Airport Terminal 2				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	213.32	1.85	106.02	38.74
Download Session Setup Success Rate %	100.00	40.00	100.00	100.00
Upload Throughput Average (Mbits/s)	21.98	1.00	18.97	5.31
Upload Session Setup Success Rate %	80.00	40.00	100.00	100.00
Web Browsing Delay (Second)	8.62	-	3.91	3.11
Youtube Initial Buffer Delay (Second)	2.13	-	0.71	1.11
Latency (ms) - 50th Percentile	38.94	-	24.81	39.74
Jitter (ms)	4.58	-	9.34	7.21
Packet Loss Rate%	10.00	100.00	0.80	0.10

Table-42: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-Web Browsing, Youtube & Ping tests were failed.

IGI Airport Terminal 3				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	57.40	-	85.84	30.13
Download Session Setup Success Rate%	100.00	0.00	80.00	100.00
Upload Throughput Average (Mbits/s)	2.34	-	2.29	6.84
Upload Session Setup Success Rate %	100.00	0.00	80.00	100.00
Web Browsing Delay (Second)	5.98	-	5.59	4.58
Youtube Initial Buffer Delay (Second)	5.06	-	0.77	1.22
Latency (ms)- 50th Percentile	45.59	-	24.19	39.03
Jitter (ms)	11.70	-	24.47	5.00
Packet Loss Rate%	1.20	100.00	5.20	0.50

Table-43: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "--"Respective tests were failed.

ISBT Kashmere Gate				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	80.74	5.93	141.13	41.29
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	17.33	1.28	11.63	13.38
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	5.97	5.86	3.38	1.26
Youtube Initial Buffer Delay (Second)	1.83	2.52	0.64	0.69
Latency (ms) – 50th Percentile	51.60	17.03	24.22	37.02
Jitter (ms)	7.68	26.69	10.70	7.34
Packet Loss Rate%	21.60	0.90	3.60	0.10

Table-44: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Iskcon Temple Rohini				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	308.12	2.26	209.80	18.28
Download Session Setup Success Rate %	100.00	60.00	100.00	100.00
Upload Throughput Average (Mbits/s)	20.51	0.92	9.46	2.45
Upload Session Setup Success Rate %	100.00	60.00	100.00	100.00
Web Browsing Delay (Second)	2.75	6.38	2.87	3.03
Youtube Initial Buffer Delay (Second)	0.55	-	0.62	2.76
Latency (ms) - 50th Percentile	43.65	29.07	21.61	31.61
Jitter (ms)	4.61	964.37	4.24	4.90
Packet Loss Rate%	41.20	4.00	0.10	0.30

Table-45: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "--"Youtube tests were failed.

Jaipur Golden Hospital Rohini				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	206.90	7.59	187.42	9.52
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	8.00	1.28	14.83	1.54
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	5.55	5.94	2.24	2.90
Youtube Initial Buffer Delay (Second)	1.61	1.47	0.59	0.92
Latency (ms)- 50th Percentile	44.94	22.00	16.05	37.36
Jitter (ms)	15.81	23.69	5.61	5.98
Packet Loss Rate%	0.20	0.70	0.30	1.30

Table-46: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Rohini West Metro Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	225.11	6.16	151.24	38.95
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	13.22	3.36	5.09	3.96
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.34	2.59	4.12	5.19
Youtube Initial Buffer Delay (Second)	0.71	1.53	0.76	1.96
Latency (ms) - 50th Percentile	48.64	13.90	20.42	27.13
Jitter (ms)	13.23	125.98	10.56	6.43
Packet Loss Rate%	0.50	0.70	0.90	0.40

Table-47: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Samaypur Badli Metro Station				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	71.47	2.02	103.92	5.06
Download Session Setup Success Rate%	100.00	100.00	100.00	80.00
Upload Throughput Average (Mbits/s)	62.39	2.21	16.34	2.11
Upload Session Setup Success Rate %	100.00	100.00	100.00	80.00
Web Browsing Delay (Second)	3.25	2.93	3.90	2.60
Youtube Initial Buffer Delay (Second)	1.78	5.82	0.64	0.90
Latency (ms)- 50th Percentile	42.99	24.73	36.58	35.40
Jitter (ms)	5.71	15.58	8.70	10.09
Packet Loss Rate%	0.50	0.30	1.80	1.40

Table-48: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)

Overall Data Performance					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	214.02	-	207.94	41.13
	Upload Throughput Average (Mbits/s)	30.21	-	15.85	14.97
4G	Download Throughput Average (Mbits/s)	24.01	-	31.07	16.36
	Upload Throughput Average (Mbits/s)	5.67	-	6.56	3.31

Table-49: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Bal Bharti Public School Pitampura					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	25.19	-	425.25	49.12
	Upload Throughput Average (Mbits/s)	2.77	-	56.23	25.32
4G	Download Throughput Average (Mbits/s)	10.52	-	94.33	17.96
	Upload Throughput Average (Mbits/s)	3.10	-	14.27	7.79

Table-50: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Delhi Technological University Daulatpur Delhi					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	189.23	-	297.37	-
	Upload Throughput Average (Mbits/s)	20.58	-	8.83	-
4G	Download Throughput Average (Mbits/s)	29.63	-	11.58	20.01
	Upload Throughput Average (Mbits/s)	3.77	-	1.36	2.35

Table-51: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

District Court Rohini					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	268.14	-	329.60	40.44
	Upload Throughput Average (Mbits/s)	42.50	-	16.07	14.45
4G	Download Throughput Average (Mbits/s)	6.46	-	37.01	30.97
	Upload Throughput Average (Mbits/s)	2.10	-	11.60	3.91

Table-52: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Fortis Hospital Shalimar Bagh					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	132.12	-	405.55	31.09
	Upload Throughput Average (Mbits/s)	4.44	-	16.39	7.13
4G	Download Throughput Average (Mbits/s)	13.40	-	5.00	10.20
	Upload Throughput Average (Mbits/s)	1.30	-	1.06	1.57

Table-53: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Gurudwara Nanak Piao Sahib Near Model Town Metro Station					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	587.94	-	101.97	50.96
	Upload Throughput Average (Mbits/s)	62.35	-	4.06	36.24
4G	Download Throughput Average (Mbits/s)	56.92	-	51.72	23.67
	Upload Throughput Average (Mbits/s)	7.31	-	10.12	2.10

Table-54: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

IGI Airport Terminal 1					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	267.67	-	239.47	43.36
	Upload Throughput Average (Mbits/s)	73.35	-	18.47	4.94
4G	Download Throughput Average (Mbits/s)	20.02	-	11.48	9.64
	Upload Throughput Average (Mbits/s)	14.80	-	2.19	4.16

Table-55: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

IGI Airport Terminal 2					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	201.73	-	62.69	41.17
	Upload Throughput Average (Mbits/s)	28.59	-	21.89	4.17
4G	Download Throughput Average (Mbits/s)	24.94	-	28.37	10.17
	Upload Throughput Average (Mbits/s)	10.25	-	4.50	4.40

Table-56: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

IGI Airport Terminal 3					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	26.83	-
	Upload Throughput Average (Mbits/s)	-	-	1.94	-
4G	Download Throughput Average (Mbits/s)	52.74	-	27.41	21.81
	Upload Throughput Average (Mbits/s)	5.29	-	11.35	4.90

Table-57: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

ISBT Kashmere Gate					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	89.17	-	160.00	40.44
	Upload Throughput Average (Mbits/s)	14.24	-	11.54	21.09
4G	Download Throughput Average (Mbits/s)	2.95	-	6.35	25.54
	Upload Throughput Average (Mbits/s)	3.80	-	5.79	2.19

Table-58: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

Iskcon Temple Rohini					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	329.69	-	209.66	-
	Upload Throughput Average (Mbits/s)	17.90	-	7.46	-
4G	Download Throughput Average (Mbits/s)	27.42	-	37.09	21.13
	Upload Throughput Average (Mbits/s)	3.90	-	6.67	2.94

Table-59: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Jaipur Golden Hospital Rohini					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	157.52	-	186.68	-
	Upload Throughput Average (Mbits/s)	6.37	-	14.24	-
4G	Download Throughput Average (Mbits/s)	29.74	-	28.42	7.05
	Upload Throughput Average (Mbits/s)	4.87	-	7.99	1.87

Table-60: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Rohini West Metro Station					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	197.76	-	139.66	32.42
	Upload Throughput Average (Mbits/s)	13.09	-	5.19	4.44
4G	Download Throughput Average (Mbits/s)	19.61	-	21.58	6.15
	Upload Throughput Average (Mbits/s)	4.05	-	3.90	2.18

Table-61: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Samaypur Badli Metro Station					
Parameters		Service Provider			
		AIRTEL	MTNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	67.96	-	118.53	-
	Upload Throughput Average (Mbits/s)	65.37	-	23.77	-
4G	Download Throughput Average (Mbits/s)	18.19	-	43.53	8.46
	Upload Throughput Average (Mbits/s)	10.99	-	4.49	2.73

Table-62: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

4.4 Walk Test

Walk Test has been conducted on 16th April 2026 and 17th April 2026. Two locations have been tested in the city. (Refer Table-1)

4.4.1 Walk test locations



Figure-29: Walk Test locations.

4.4.2 Walk Test Covered

1. Azadpur Mandi
2. Delhi Sarai Rohilla Railway Station

4.4.3 Voice Performance

Azadpur Mandi				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	26	26	26	26
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	7.69	0.00	0.00
Call Setup Time-Average (Second)	0.70	2.66	0.55	0.75

Table-63: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Delhi Sarai Rohilla Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempt	25	35	26	26
Call Setup Success Rate %	100.00	54.29	100.00	100.00
Drop Call Rate %	0.00	52.63	0.00	0.00
Call Setup Time-Average (Second)	0.66	6.43	0.50	0.71

Table-64: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

4.4.4 Data Performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Azadpur Mandi				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	126.90	6.06	152.53	22.70
Download Session Setup Success Rate %	100.00	89.29	100.00	100.00
Upload Throughput Average (Mbits/s)	32.17	2.71	18.61	20.03
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	45.91	14.56	29.27	47.12

Table-65: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Delhi Sarai Rohilla Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Download Throughput Average (Mbits/s)	107.50	-	357.88	33.01
Download Session Setup Success Rate %	100.00	0.00	100.00	100.00
Upload Throughput Average (Mbits/s)	33.88	-	32.80	19.67
Upload Session Setup Success Rate %	100.00	0.00	100.00	100.00
Latency (ms) - 50th Percentile	42.53	-	22.75	36.82

Table-66: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "All download & Upload tests were failed in MTNL.

4.5 Airport Route

Drive test has been conducted on 15th April 2026 covering one Airport route. (Refer Table-1)

4.5.1 Drive test route

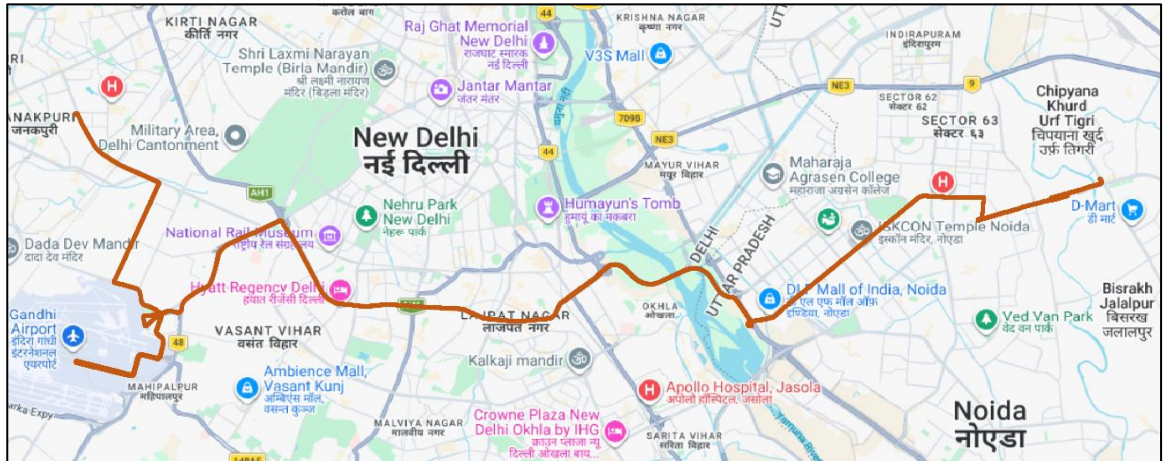


Figure-30: Drive test route.

4.5.2 Routes Covered

Noida Sector 121 to IGI Airport.

4.5.3 Voice performance

(a) **Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect the experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	MTNL	VIL
Call Attempts	64	70	63
Call Setup Success Rate %	100.00	88.57	100.00
Drop Call Rate %	1.56	8.06	1.59
Call Setup Time-Average (Second)	3.19	2.73	2.92
Handover Success Rate %	97.81	100.00	95.44

Table-67: Summary of voice call performance in 3G/2G network mode only.

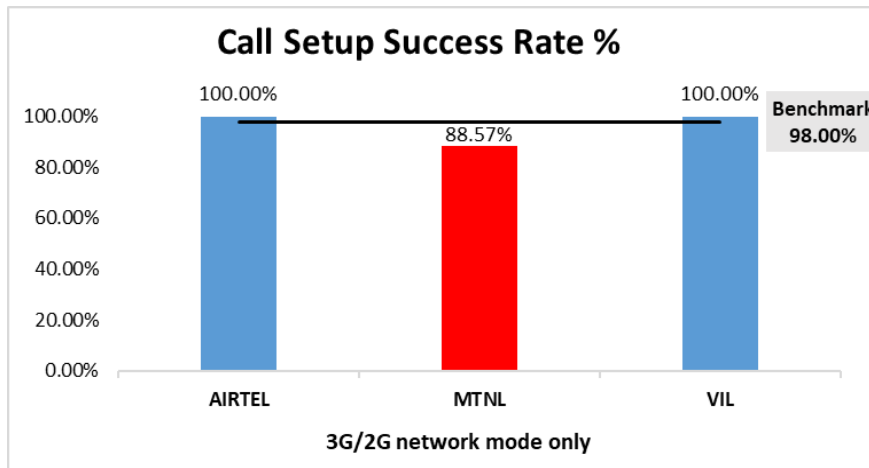


Figure-31: Performance for call setup success rate.

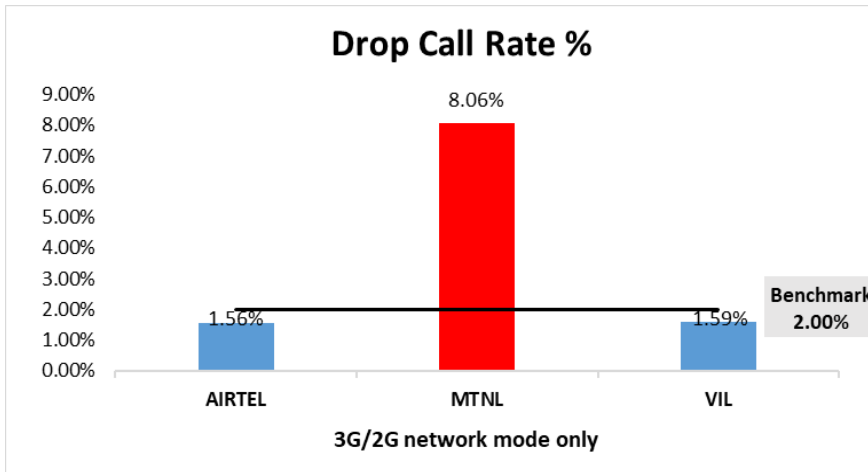


Figure-32: Performance for drop call rate.

(b) **Network Technology:** This section represents time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	MTNL	VIL
3G	NA	99.95%	NA
2G	100.00%	0.00%	99.51%
Limited Service	0.00%	0.05%	0.49%

Table-68: Time spent on technology during drive test 3G/2G network mode only.



Figure-33: Serving technology plots 3G/2G network mode – AIRTEL.



Figure-34: Serving technology plots 3G/2G network mode – MTNL.

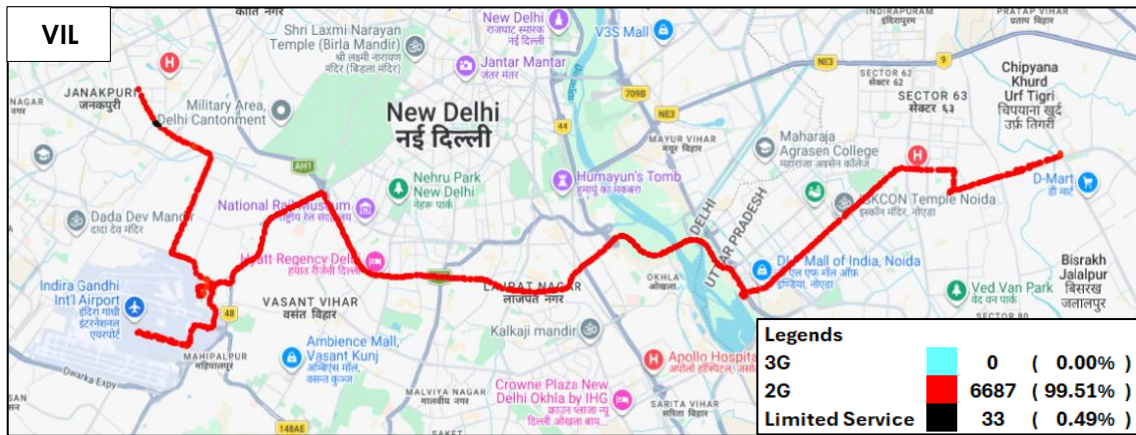


Figure 35: Serving technology plots 3G/2G network mode –VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure-63, 64 & 65 for map view)

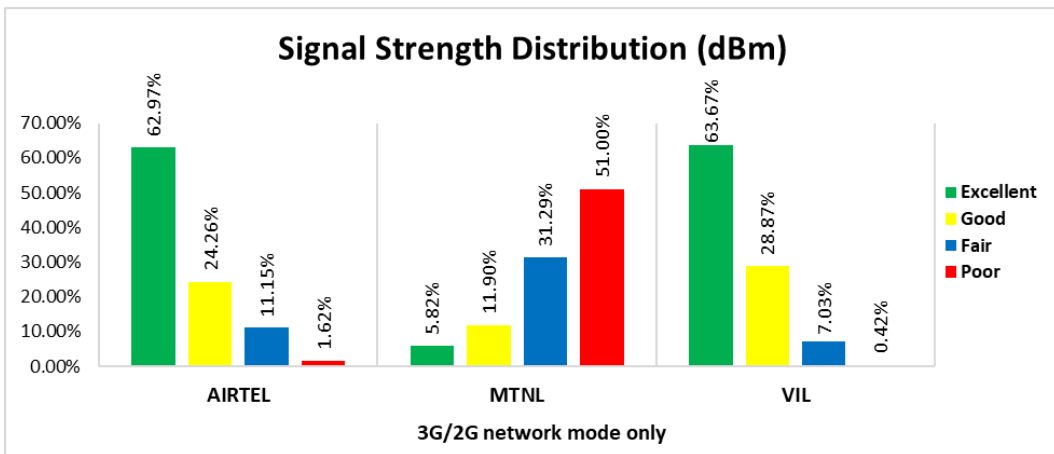


Figure-36: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 63% of samples falling in the excellent signal strength category.
- MTNL has 6% of samples falling in the excellent signal strength category.
- VIL has 64% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	MTNL	RJIL	VIL
Call Attempts	66	75	66	66
Call Setup Success Rate %	100.00	93.33	100.00	100.00
Drop Call Rate %	1.52	27.14	0.00	1.52
Call Setup Time Average (Second)	0.73	4.27	0.53	0.66
Handover Success Rate %	99.64	100.00	100.00	99.55

Table-69: Summary of voice call performance in network auto-selection mode.

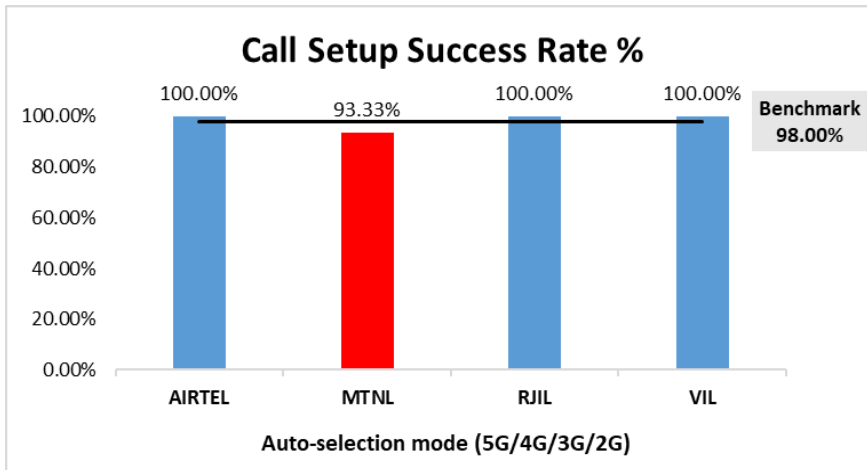


Figure-37: Performance for call setup success rate.

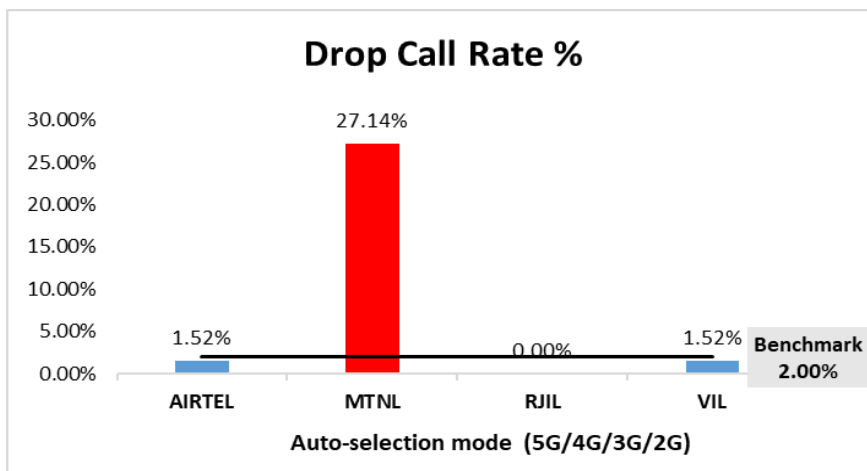


Figure-38: Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	MTNL	RJIL	VIL
Call Established (within service provider Network)	64	53	63	62
Number of silence call for >4 Sec	0	NA	0	2
Silence Call Rate %	0.00	NA	0.00	3.23
Number of silence instances for >4 Sec	0	NA	0	2
Number of silence instances for >3 Sec	0	NA	0	5
Number of silence instances for >2 sec	0	NA	1	12
RTP Jitter (4G & 5G) in ms	5.00	NA	16.14	18.03
Packet loss Rate Downlink %	0.50	NA	0.49	1.05
Packet loss Rate Uplink %	0.66	NA	0.74	1.60

Table-70: Summary of silence instances & packet loss rate for mobile to mobile call.

Note-

- NA- Due to unavailability of packet switched (VoLTE & VoNR) network in MTNL silence instances are not captured.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	MTNL	RJIL	VIL
Total Number of MOS Samples for calls in table-70	371	258	365	370
Speech Quality (Average MOS)	3.92	2.54	4.51	4.31
Number of samples with MOS >=4 to <5 (Excellent)	272	0	325	293
Number of samples with MOS >=3 to <4 (Good)	80	102	28	48
Number of samples with MOS >=2 to <3 (Fair)	12	89	9	19
Number of samples with MOS >=1 to <2 (Poor)	7	67	3	10
%age of samples with MOS >=4 to <5 (Excellent)	73.32%	0.00%	89.04%	79.19%
%age of samples with MOS >=3 to <4 (Good)	21.56%	39.53%	7.67%	12.97%
%age of samples with MOS >=2 to <3 (Fair)	3.23%	34.50%	2.47%	5.14%
%age of samples with MOS >=1 to <2 (Poor)	1.89%	25.97%	0.82%	2.70%

Table-71: Summary of speech quality (MOS) samples.

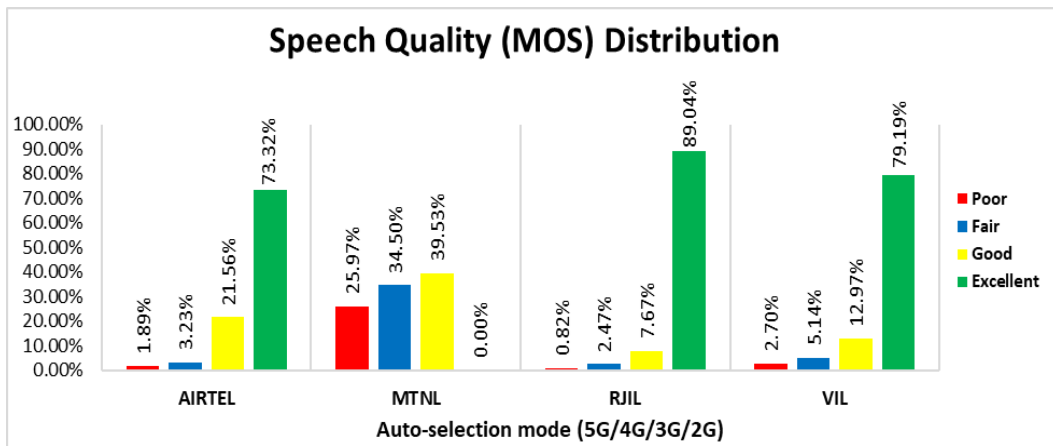


Figure-39: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	MTNL	RJIL	VIL
5G	2.46%	NA	91.90%	0.34%
4G	97.54%	NA	8.10%	98.41%
3G	NA	100.00%	NA	NA
2G	0.00%	0.00%	NA	1.25%
Limited Service	0.00%	0.00%	0.00%	0.00%

Table-72: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice.

Note-
• NA- Service provider doesn't provide services in respective technology.



Figure-40: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL

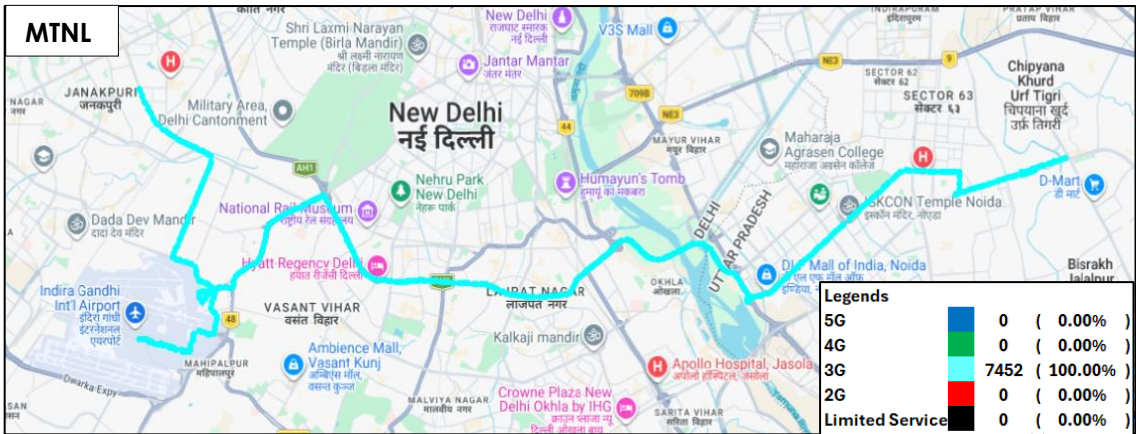


Figure-41: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - MTNL.

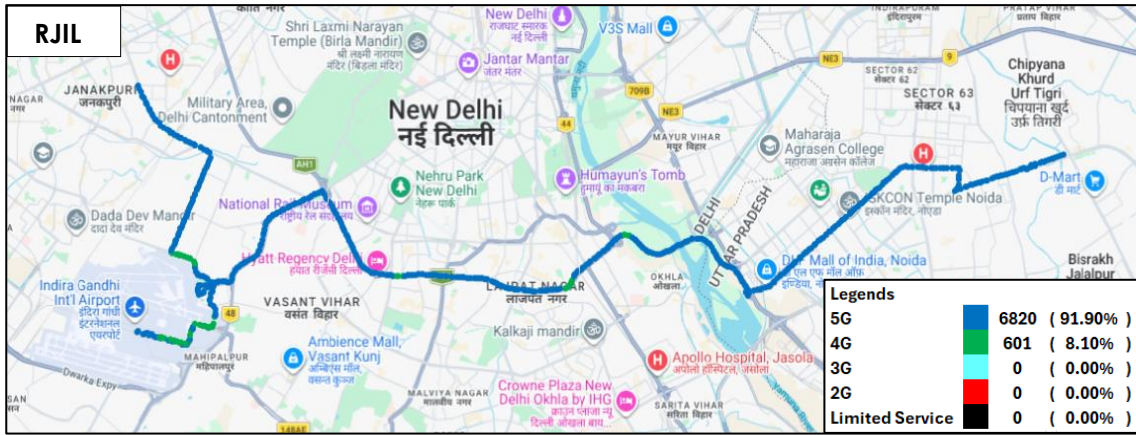


Figure-42: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice- RJIL.

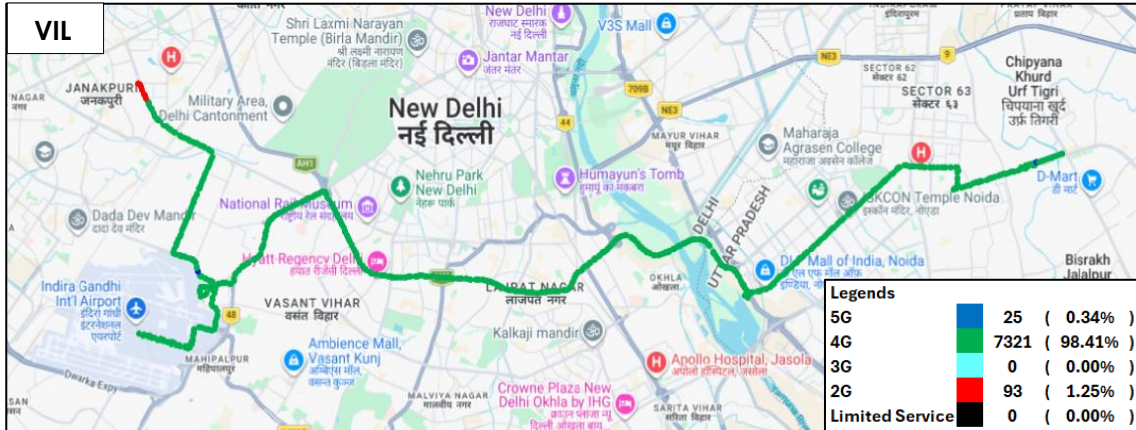


Figure-43: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - VIL.

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) voice. (Refer figure-66, 67, 68 & 69 for map view)

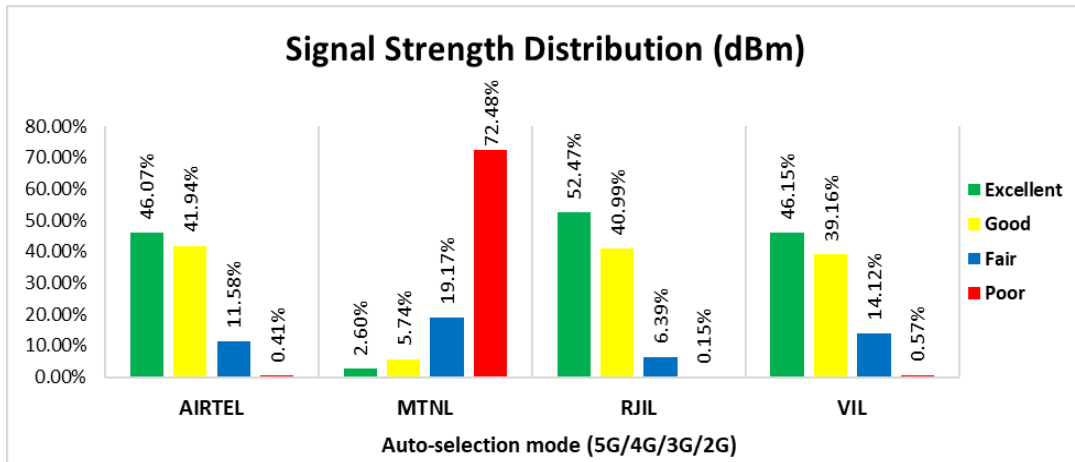


Figure-44: Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

Observations:

- Airtel has 46% of samples falling in the excellent signal strength category.
- MTNL has 3% of samples falling in the excellent signal strength category.
- RJIL has 52% of samples falling in the excellent signal strength category.
- VIL has 46% of samples falling in the excellent signal strength category.

4.5.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	MTNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	132.26	4.28	222.34	35.28
	80th Percentile	208.66	6.35	370.77	46.70
	20th Percentile	44.76	1.67	86.47	25.49
Upload Throughput (Mbits/s)	Average	28.36	1.14	23.55	25.18
	80th Percentile	50.73	1.96	34.61	43.79
	20th Percentile	7.26	0.17	7.30	10.48
Latency (ms)	50th Percentile	44.01	25.66	20.46	39.71

Table-73: Summary of Data performance in network auto-selection mode.

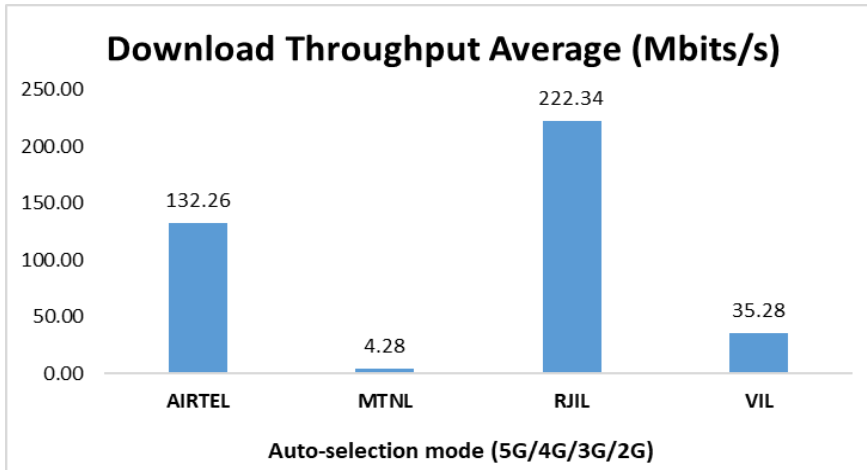


Figure 45: Download throughput.

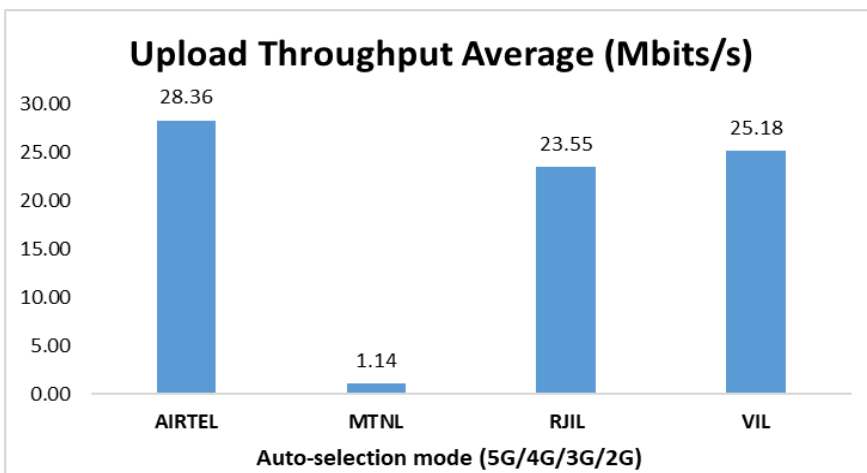


Figure-46: Upload throughput.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	MTNL	RJIL	VIL
5G	81.82%	NA	98.52%	78.24%
4G	18.14%	NA	1.42%	21.76%
3G	NA	95.61%	NA	NA
2G	0.00%	0.14%	NA	0.00%
Limited Service	0.04%	4.25%	0.07%	0.00%

Table-74: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

Note-

- NA- Service provider doesn't provide services in respective technology.

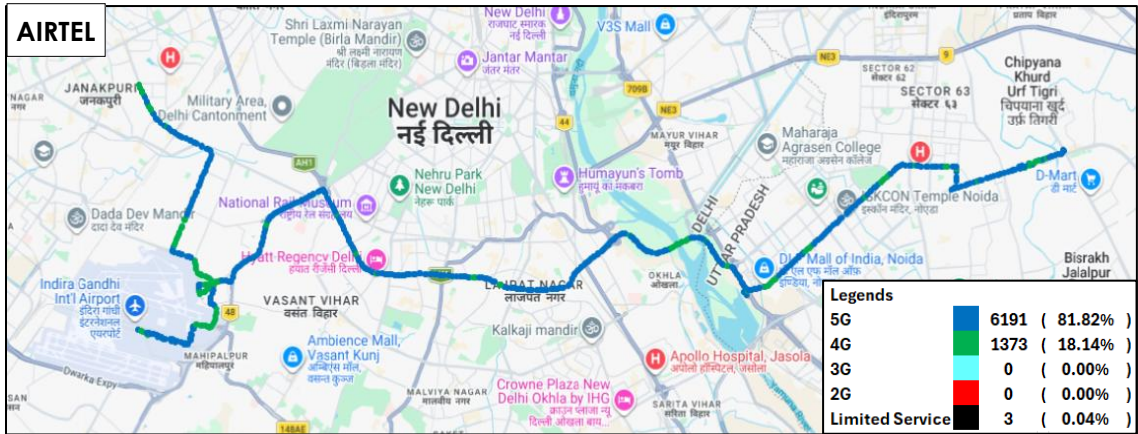


Figure-47: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - AIRTEL



Figure-48: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - MTNL.



Figure-49: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - RJIL.

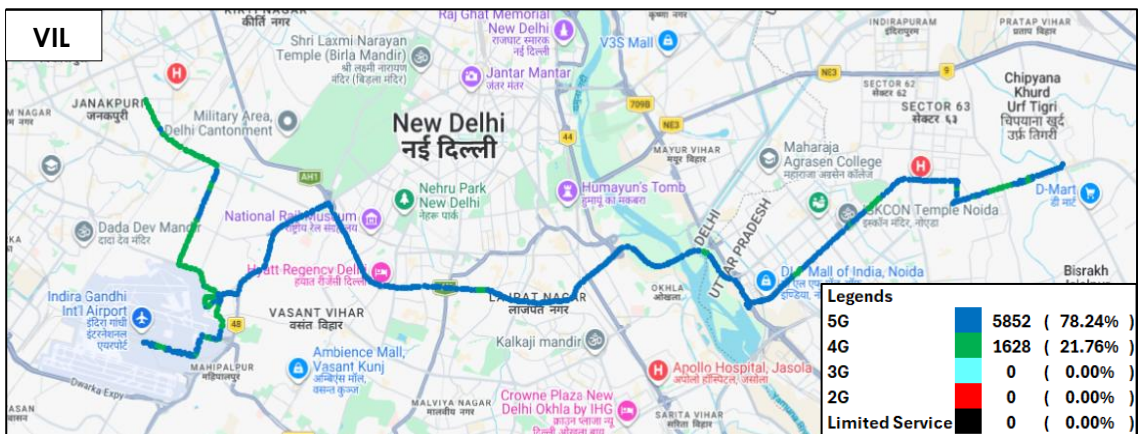


Figure-50: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - VIL.

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-70, 71, 72 & 73 for map view)

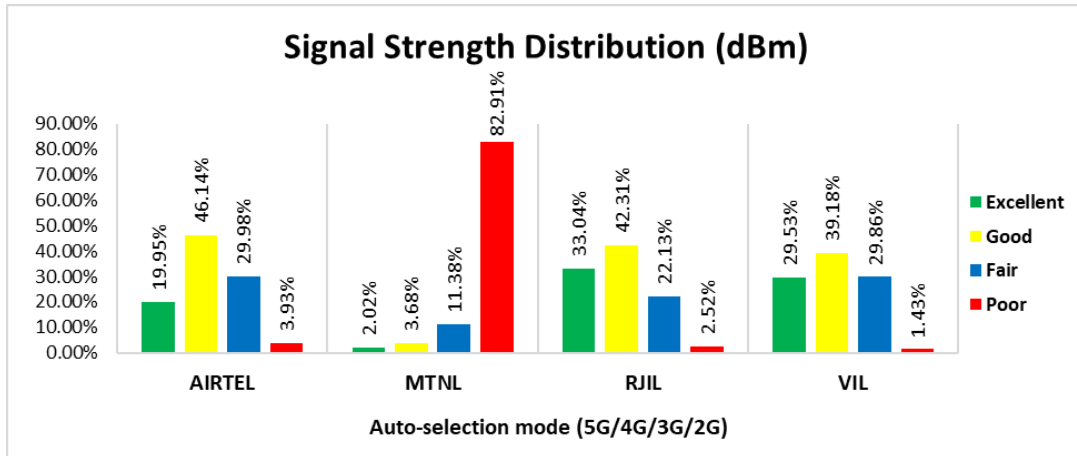


Figure-51: Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

Observations:

- Airtel has 20% of samples falling in the excellent signal strength category.
- MTNL has 2% of samples falling in the excellent signal strength category.
- RJIL has 33% of samples falling in the excellent signal strength category.
- VIL has 30% of samples falling in the excellent signal strength category.

5. Voice & Data Key findings

5.1 Overall Voice

1. Call Setup Success Rate:

- a) Airtel, MTNL and VIL have 89.55%, 64.80% and 95.70% call setup success rate respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, MTNL, RJIL and VIL have 97.22%, 69.21%, 99.16% and 99.86% call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- c) Airtel, RJIL & VIL have 100.00% call setup success rate while calling on peer service provider's network for inter-operator calls. (refer table-9)
- d) MTNL had a 100.00% call setup success when calling RJIL and VIL, whereas call blocking was observed when calling Airtel. (refer table-9)

2. Call Setup Time:

- a) Airtel, MTNL and VIL call setup time is 3.38, 2.73 & 4.05 seconds respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, MTNL, RJIL & VIL call setup time is 0.75, 2.88, 0.56 & 0.60 seconds respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

3. Call Silence/Mute Rate:

In packet switched network (4G/5G) VIL, Airtel & RJIL have 2.15%, 1.40% & 0.40 silence call rate respectively. Further RJIL has higher RTP packet loss rate in downlink (1.86%) compared to VIL (1.67%) & Airtel (0.54%). In uplink the RTP packet loss rate is higher for RJIL (1.88%) compared to VIL (1.51%) & Airtel (0.62%). (refer table-6)

4. Drop Call Rate:

- a) Airtel, MTNL and VIL drop call rate is 0.83%, 11.66% and 2.45% respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, MTNL, RJIL and VIL drop call rate is 0.57%, 13.84%, 0.57% and 0.14% respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

5.2 Overall Data

1. Data download and upload performance (Overall i.e. LSA):

- a) Airtel, MTNL, RJIL and VIL average download speeds are 169.80 Mbps, 4.43 Mbps, 243.98 Mbps and 26.26 Mbps respectively. (refer table-11)
- b) Airtel, MTNL, RJIL and VIL average upload speeds are 27.32 Mbps, 1.47 Mbps, 24.42 Mbps and 13.95 Mbps respectively. (refer table-11)

2. Data download and upload performance (static i.e. while stationary):

- a) Airtel, MTNL, RJIL and VIL average download speeds are 188.19 Mbps, 4.16 Mbps, 229.92 Mbps and 32.24 Mbps respectively. (refer table-35)
- b) Airtel, MTNL, RJIL and VIL average upload speeds are 22.71 Mbps, 1.38 Mbps, 15.92 Mbps and 9.04 Mbps respectively. (refer table-35)

3. Data session setup success rate (static i.e. while stationary):

- a) Airtel, MTNL, RJIL and VIL have 100.00%, 56.92%, 98.46% and 92.31% download session setup success rate respectively. (refer table-35)
- b) Airtel, MTNL, RJIL and VIL have 98.46%, 67.69%, 98.46% and 92.31% upload session setup success rate respectively. (refer table-35)

5.3 Operator wise Key Findings

1. Airtel:

Voice

- 89.55% call setup success rate and 0.83% drop call rate have been observed in 3G/2G network mode for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-3)
- 97.22% call setup success rate and 0.57% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-5)
- 88.14% call setup success rate and 0.72% drop call rate have been observed in 3G/2G network mode for city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-13)
- 95.76% call setup success rate and 0.66% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at both walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-63 & 64)
- 100.00% call setup success rate and 1.56% drop call rate have been observed in 3G/2G network mode for Airport route. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-67)
- 100.00% call setup success rate and 1.52% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for Airport route. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-69)

Data

- Airtel has 169.80 Mbps average download speed & 27.32 Mbps average upload speed for LSA. (refer table-11)
- Airtel has 178.70 Mbps average download speed & 27.18 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Bal Bharti Public School Pitampura, IGI Airport Terminal 3, ISBT Kashmere Gate & Samaypur Badli Metro Station have less download speed (less than 100 Mbps) out of total 13 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 36, 43, 44 & 48)
- Bal Bharti Public School Pitampura, Delhi Technological University Daulatpur Delhi, Fortis Hospital Shalimar Bagh, IGI Airport Terminal 3, ISBT Kashmere Gate, Jaipur Golden Hospital Rohini and Rohini West Metro Station have less upload speed (less than 20 Mbps) out of total 13 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 36, 37, 39, 43, 44, 46 & 47)
- Airtel has 132.26 Mbps average download speed & 28.36 Mbps average upload speed across the measured routes for Airport route. (refer table-73)

2. MTNL:

Voice

- 64.80% call setup success rate and 11.66% drop call rate have been observed in 3G/2G network mode for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 69.21% call setup success rate and 13.84% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 61.99% call setup success rate and 12.26% drop call rate have been observed in 3G/2G network mode for city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 59.25% call setup success rate and 13.26% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 3.85% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is not meeting the benchmark of 2.00% for drop call rate. (refer table-21)
- 100.00% call setup success rate and 7.69% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Azadpur Mandi walk test location. Performance is not meeting the benchmark of 2.00% for drop call rate. (refer table- 63)
- 54.29% call setup success rate and 52.63% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Delhi Sarai Rohilla Railway Station walk test location. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-64)
- 88.57% call setup success rate and 8.06% drop call rate have been observed in 3G/2G network mode for Airport route. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-67)
- 93.33% call setup success rate and 27.14% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for Airport route. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-69)

Data

- MTNL has 4.43 Mbps average download speed 1.47 Mbps average upload speed for LSA. (refer table-11)
- MTNL has 4.25 Mbps average download speed & 1.39 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 10 Mbps) at hotspots for auto-selection mode (5G/4G/3G/2G). (refer table- 36 to 48)
- All hotspot locations have less upload speed (less than 2 Mbps) except Delhi Technological University Daulatpur Delhi, Rohini West Metro Station and Samaypur Badli Metro Station out of total 13 hotspots locations for auto-selection mode (5G/4G/3G/2G). (refer table- 36, 38, 39, 40, 41, 42, 43, 44, 45 & 46)
- Both walk test locations have less download speed (less than 10 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 65 & 66)

- Delhi Sarai Rohilla Railway Station walk test location has less upload speed (less than 2 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 66)
- MTNL has 4.28 Mbps average download speed & 1.14 Mbps average upload speed across the measured routes for Airport route. (refer table- 73)

3. RJIL:

Voice

- 99.16% call setup success rate and 0.57% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 98.71% call setup success rate and 0.87% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-63 & 64)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for Airport route. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 69)

Data

- RJIL has 243.98 Mbps average download speed & 24.42 Mbps average upload speed for LSA. (refer table-11)
- RJIL has 248.72 Mbps average download speed & 25.67 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- IGI Airport Terminal 3 has less download speed (less than 100 Mbps) out of total 13 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 43)
- All hotspot locations have less upload speed (less than 20 Mbps) except Bal Bharti Public School Pitampura and Fortis Hospital Shalimar Bagh for auto-selection mode (5G/4G/3G/2G). (refer table- 37, 38, 40, 41, 42, 43, 44, 45, 46, 47 & 48)
- Azadpur Mandi has less upload speed (less than 20 Mbps) out of total 2 walktest locations for auto-selection mode (5G/4G/3G/2G). (refer table- 65)
- RJIL has 222.34 Mbps average download speed & 23.55 Mbps average upload speed across the measured routes for Airport route. (refer table- 73)

4. VIL:

Voice

- 95.70% call setup success rate and 2.45% drop call rate have been observed in 3G/2G network mode for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-3)

- 99.86% call setup success rate and 0.14% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 95.10% call setup success rate and 2.58% drop call rate have been observed in 3G/2G network mode for city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-13)
- 99.78% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 63 & 64)
- 100.00% call setup success rate and 1.59% drop call rate have been observed in 3G/2G network mode for Airport route. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-67)
- 100.00% call setup success rate and 1.52% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for Airport route. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 69)

Data

- VIL has 26.26 Mbps average download speed & 13.95 Mbps average upload speed for LSA. (refer table-11)
- VIL has 23.80 Mbps average download speed & 12.33 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 100 Mbps) at hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 36 to 48)
- All hotspot locations have less upload speed (less than 20 Mbps) except Gurudwara Nanak Piao Sahib Near Model Town Metro Station out of total 13 hotspots locations for auto-selection mode (5G/4G/3G/2G). (refer table- 36, 37, 38, 39, 41, 42, 43, 44, 45, 46, 47 & 48)
- Both Walk test locations have less upload speed (less than 20 Mbps for auto-selection mode (5G/4G/3G/2G). (refer table- 65 & 66)
- Delhi Sarai Rohilla Railway Station has less upload speed (less than 20 Mbps) out of total 2 walktest locations for auto-selection mode (5G/4G/3G/2G). (refer table- 66)
- VIL has 35.28 Mbps average download speed & 25.18 Mbps average upload speed across the measured routes for Airport route. (refer table- 73)

6. Annexure

6.1 Route wise coverage map

6.1.1 City

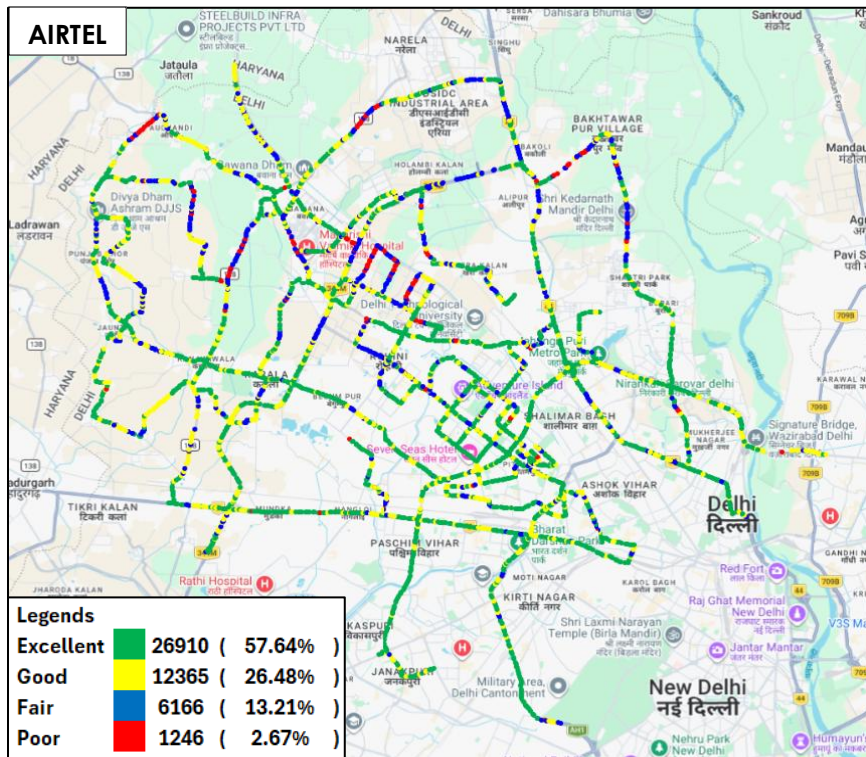


Figure-52: Signal strength 3G/2G network mode voice - AIRTEL.

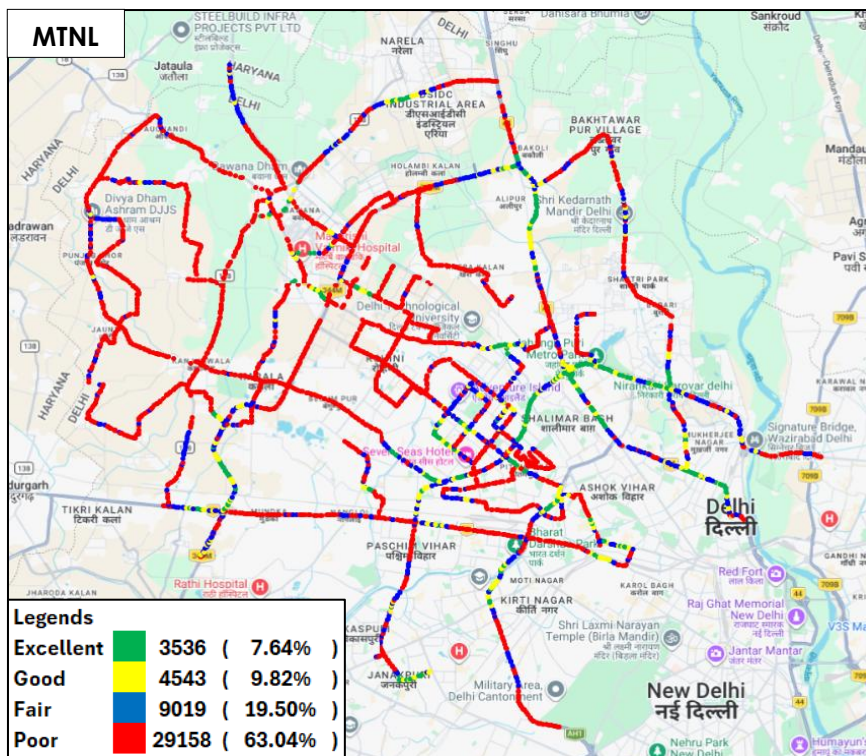


Figure-53: Signal strength 3G/2G network mode voice - MTNL.

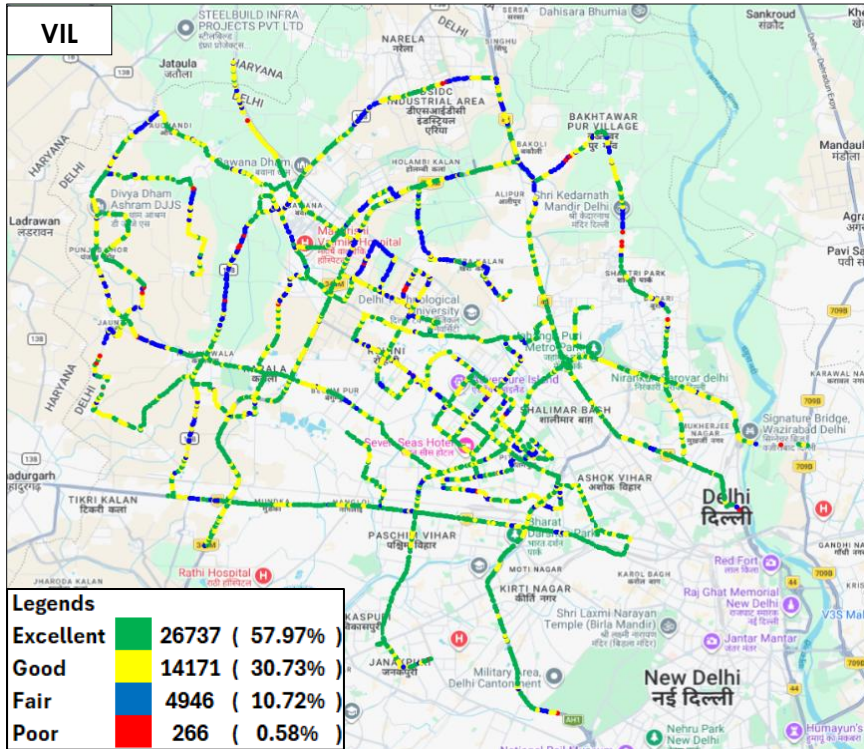


Figure-54: Signal strength 3G/2G network mode voice - VIL.

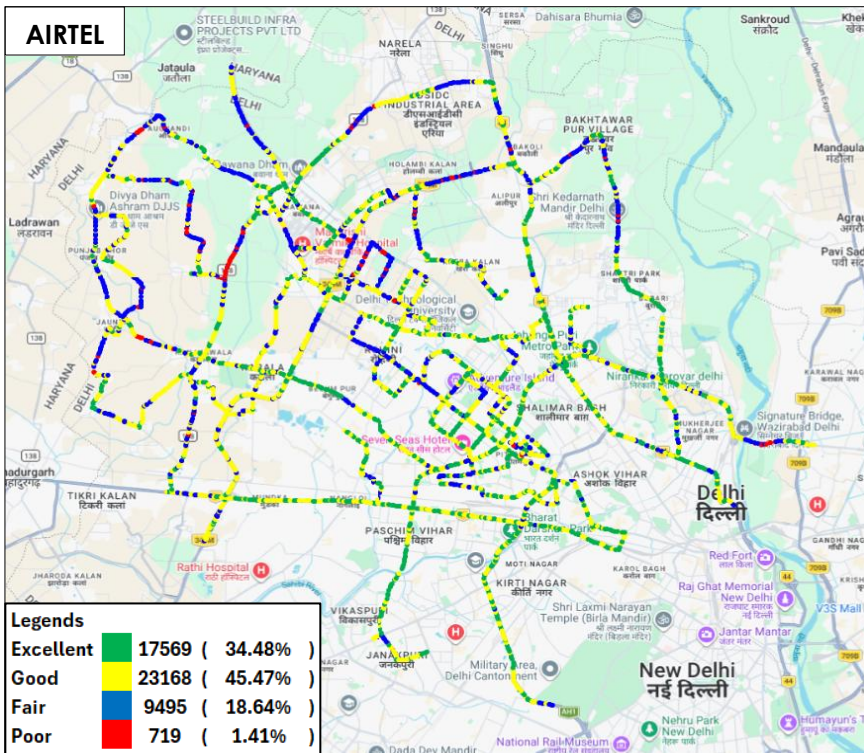


Figure-55: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

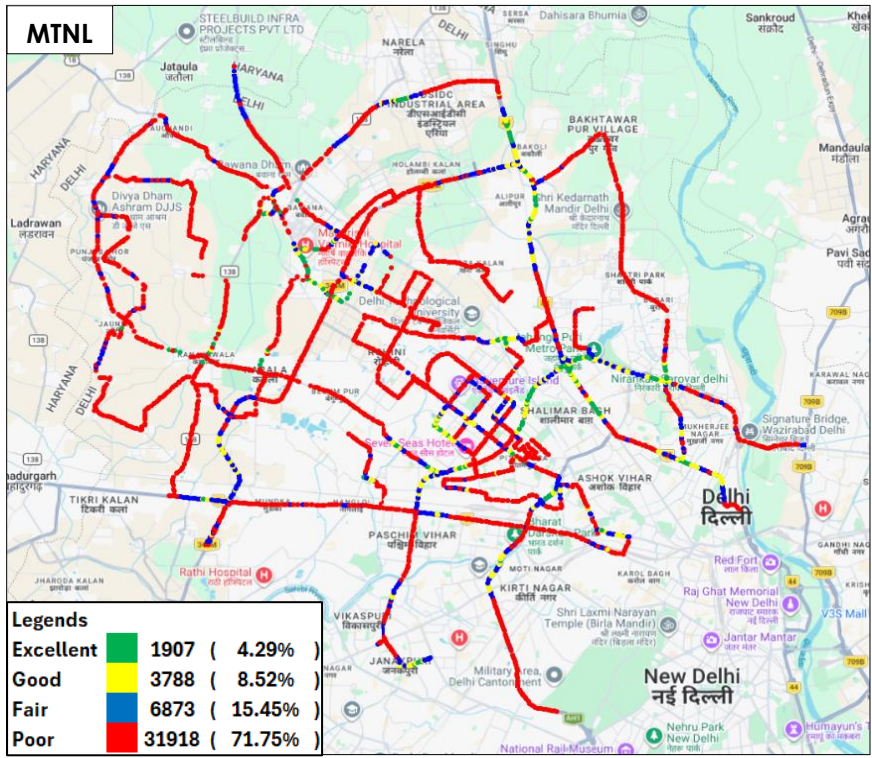


Figure-56: Signal strength auto-selection mode (5G/4G/3G/2G) voice - MTNL.

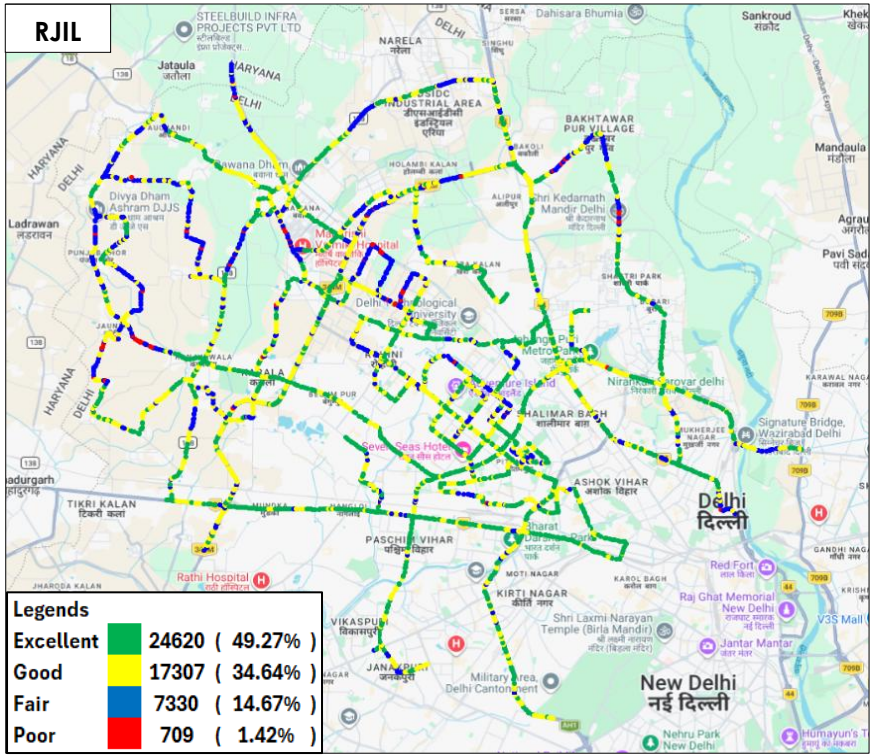


Figure-57: Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

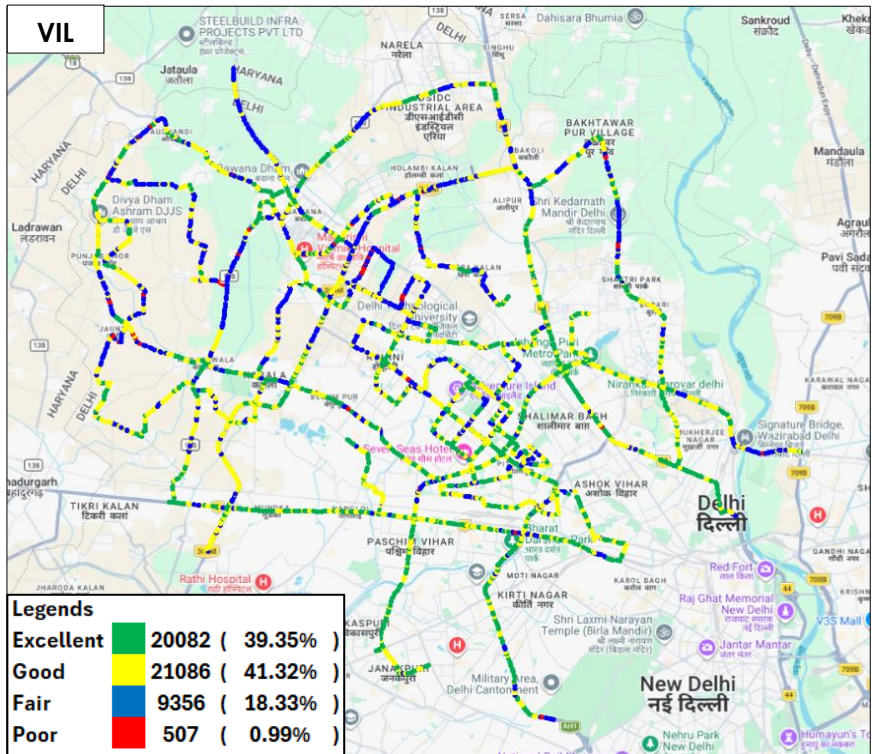


Figure-58: Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.

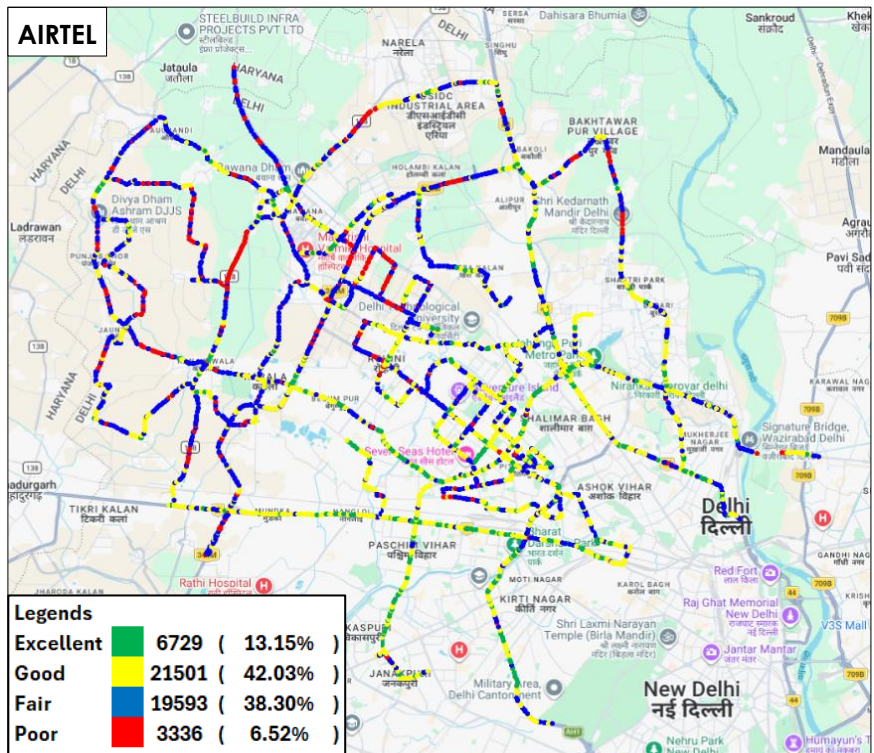


Figure-59: Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

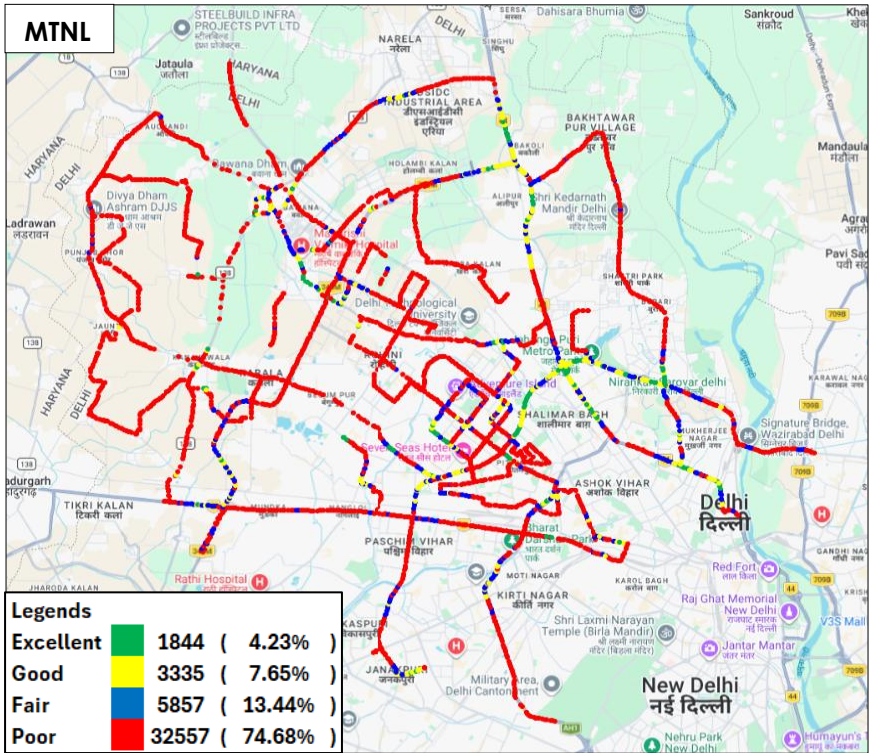


Figure-60: Signal strength auto-selection mode (5G/4G/3G/2G) data - MTNL.

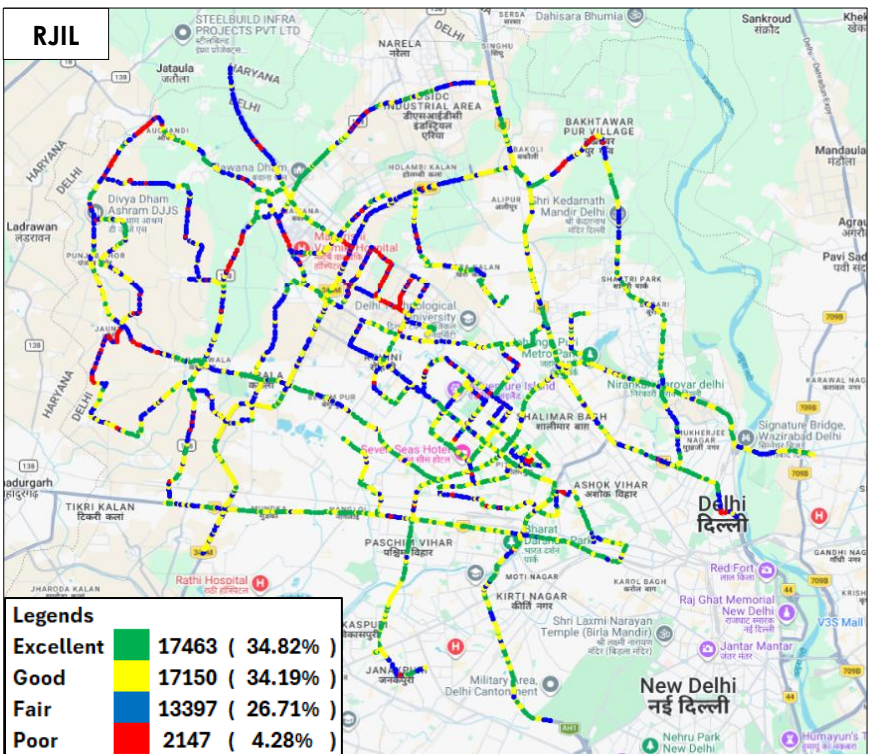


Figure-61: Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

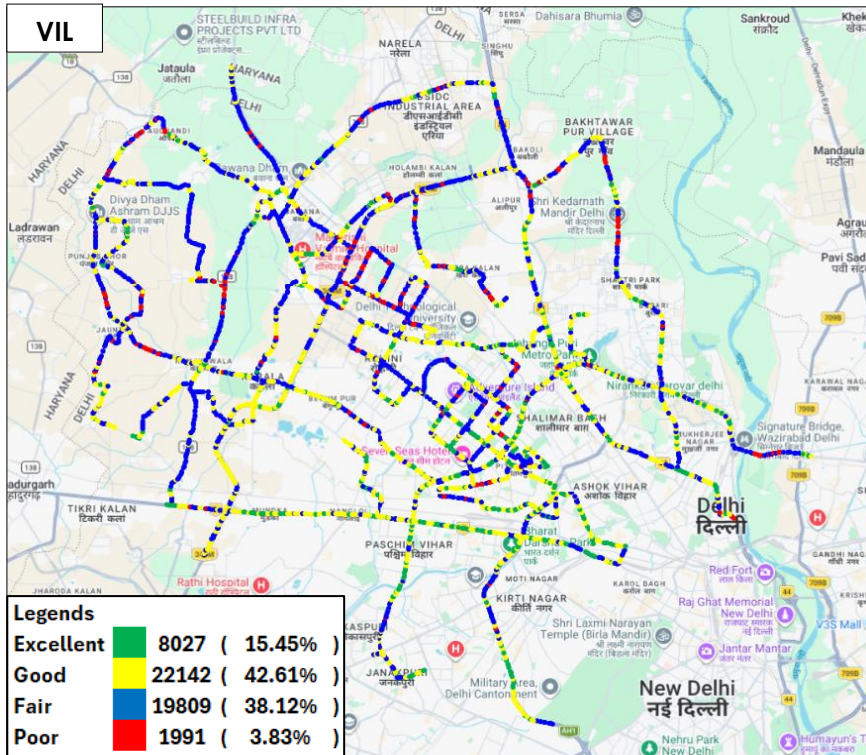


Figure-62: Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

6.1.2 Airport Route

i) Noida Sector 121 to IGI Airport

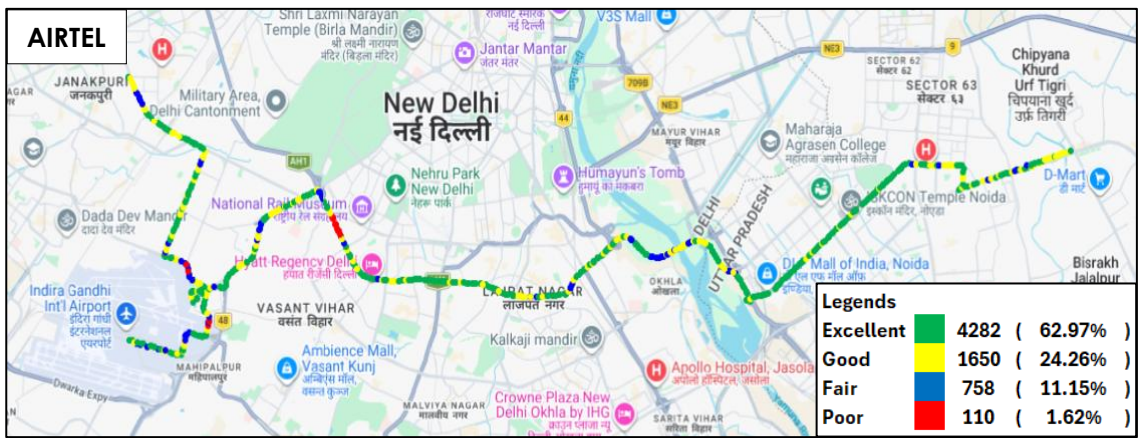


Figure-63: Signal strength 3G/2G network mode voice - AIRTEL.

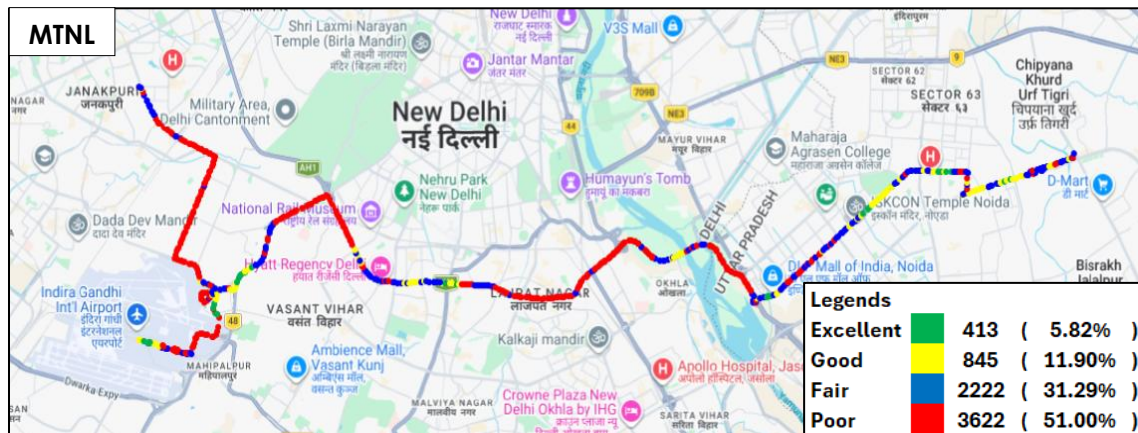


Figure-64: Signal strength 3G/2G network mode voice - MTNL.

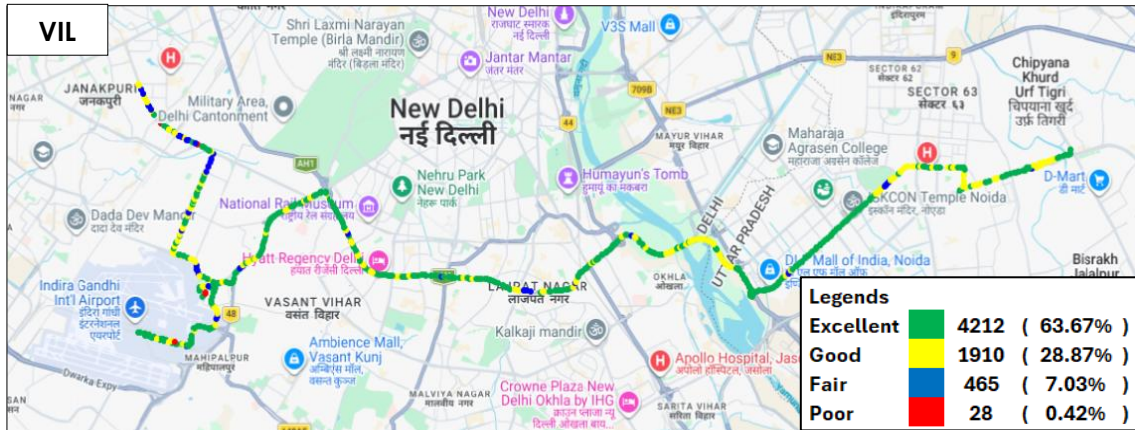


Figure-65: Signal strength 3G/2G network mode voice - VIL.

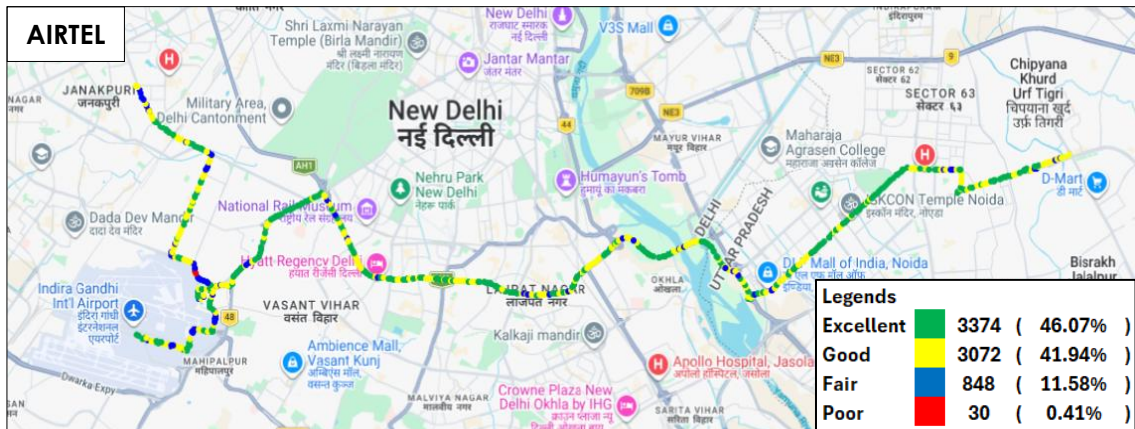


Figure-66: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.



Figure-67: Signal strength auto-selection mode (5G/4G/3G/2G) voice - MTNL.

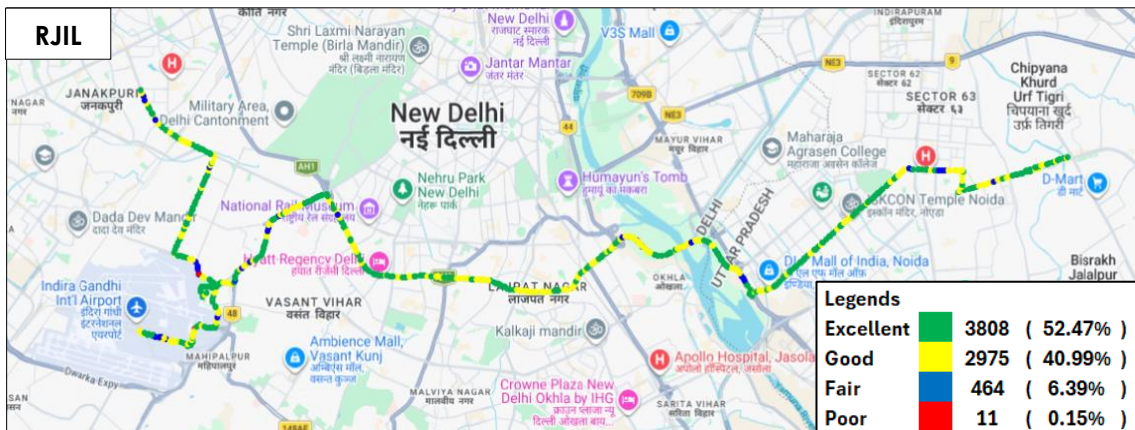


Figure-68: Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

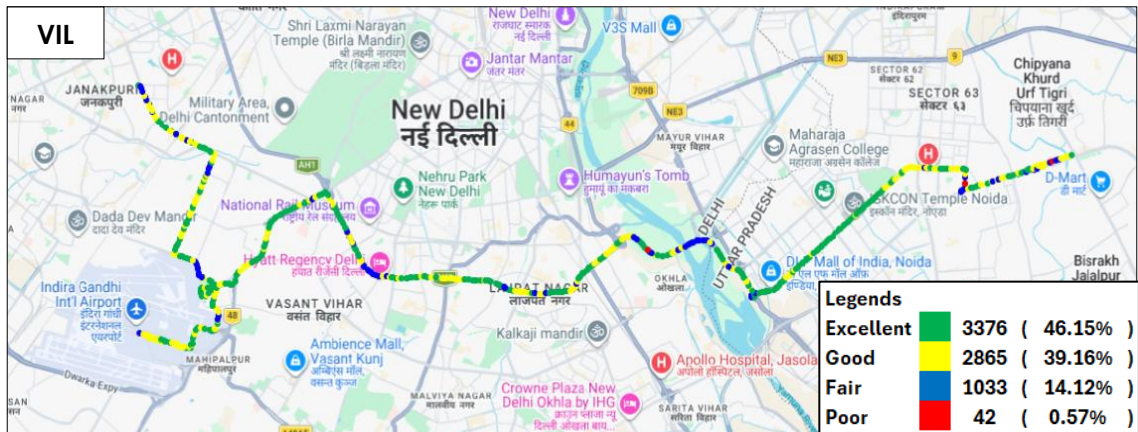


Figure-69: Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.



Figure-70: Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

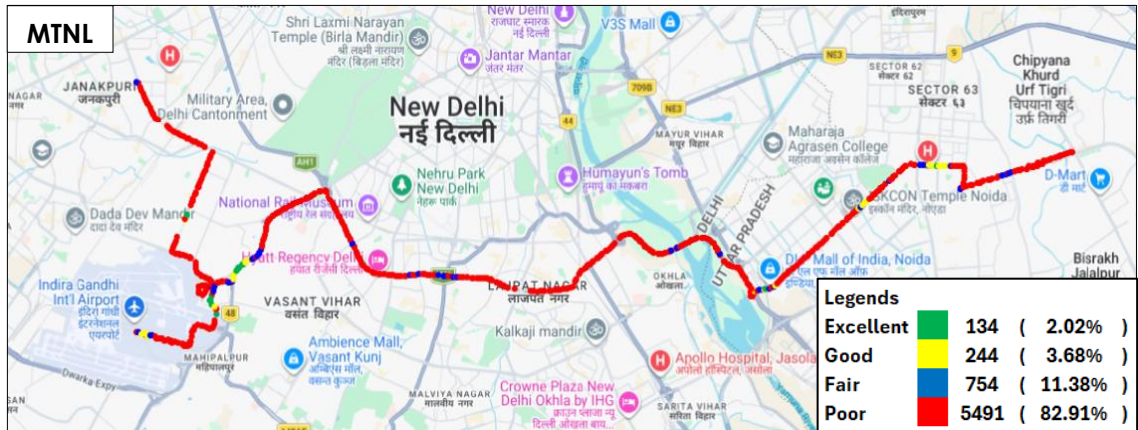


Figure-71: Signal strength auto-selection mode (5G/4G/3G/2G) data - MTNL.

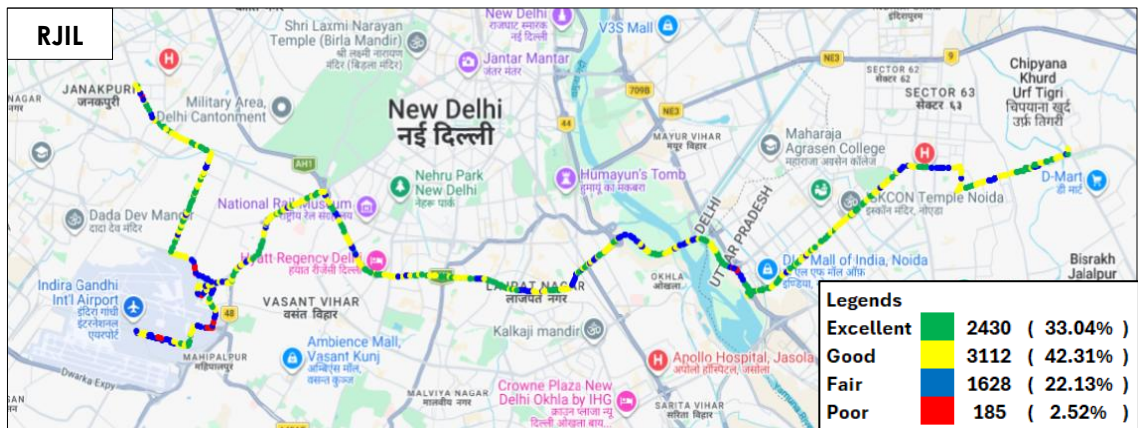


Figure-72: Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

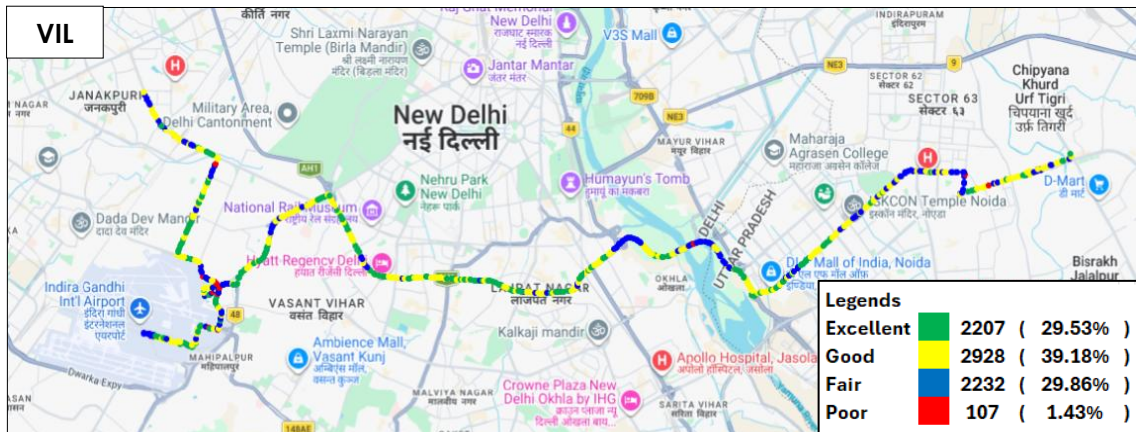


Figure-73: Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions may be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

7.1 Appendix-I

7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	<ul style="list-style-type: none"> • 3G/2G auto mode- switch Call • 5G/4G/3G/2G auto mode- switch Call • 5G/4G MOS Call 	30 Sec
Call Duration		90 seconds
Wait/ Guard Time		15 Sec

Table-75: Voice test detail

Note-

- There is 15 sec wait time after locking and before starting first call in 3G/2G call.
- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.
- Speech quality (MOS) has been measured only in city drive & Airport route by making Mobile to Mobile call.
- 90 Sec calls were made across the Airport route.

Data Test		
Test Type	Technology	Detail
FTP/HTTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
FTP/HTTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)
Web Browsing		3 popular websites (www.google.co.in , www.irctc.co.in , www.sbi.bank.in) 20 sec timeout (only at Hotspot)

Latency & Jitter (TWAMP-UDP)		25 count- Dynamic 500 count- Hotspot Payload- 42 bytes in all drive
Packet Loss Rate (TWAMP-UDP & TCP)		500 counts (TWAMP-UDP) 500 counts (TCP) at each hotspot Payload- 42 bytes in all drive

Table-76: Data test detail

<p>Note-</p> <ul style="list-style-type: none"> • 5 Data iteration to be done at each hotspot location. • Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance. • TWAMP-UDP & TCP test to be performed only once at hotspot location. • Youtube & Web browsing test to be performed at static location only. • All values are taken up to two decimal places with round off. • Airtel server was used for FTP Download, FTP Upload, TCP and TWAMP testing, for Airtel. • Delhi-based TRAI server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing, for MTNL. • RJIL server was used for FTP Download, FTP Upload, TCP and TWAMP testing, for RJIL. • VIL server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing, for VIL.
--

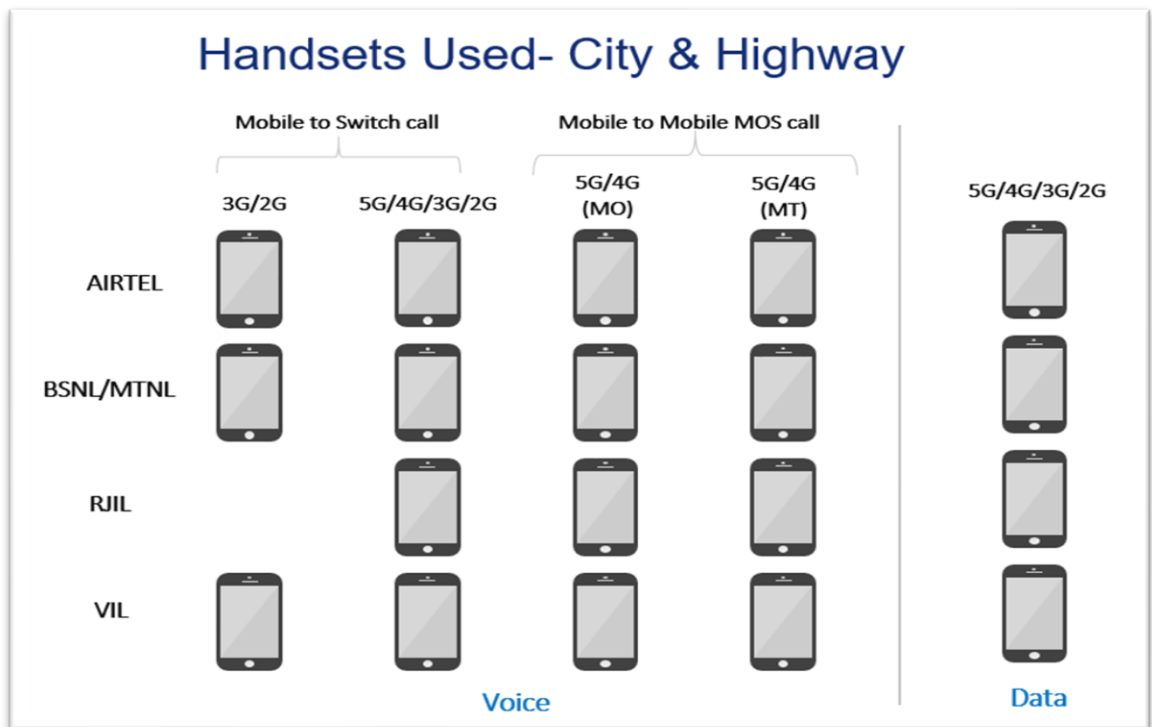


Figure-74: Number of handsets used in city & Airport route drive

MO: Mobile originating

MT: Mobile terminating

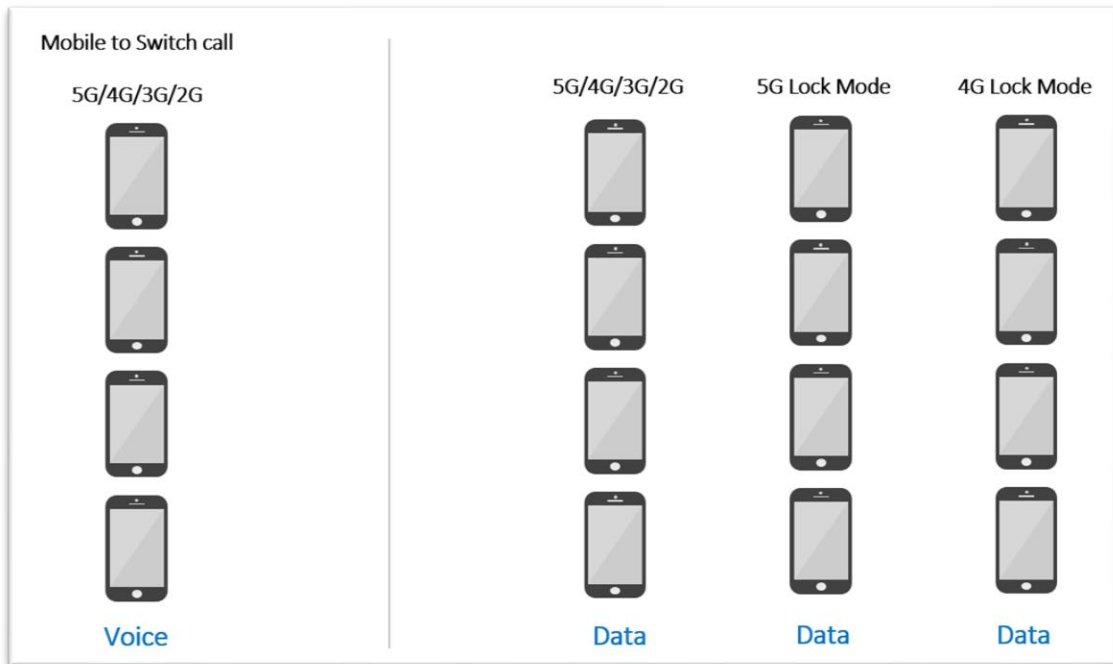


Figure-75: Number of handsets used in railway/metro/walktest/hotspot/ coastal area

Note- 5G & 4G Lock mode testing has been performed at hotspot locations only.

7.1.2 Drive test Methodology

(a) Dynamic voice testing (on the move)

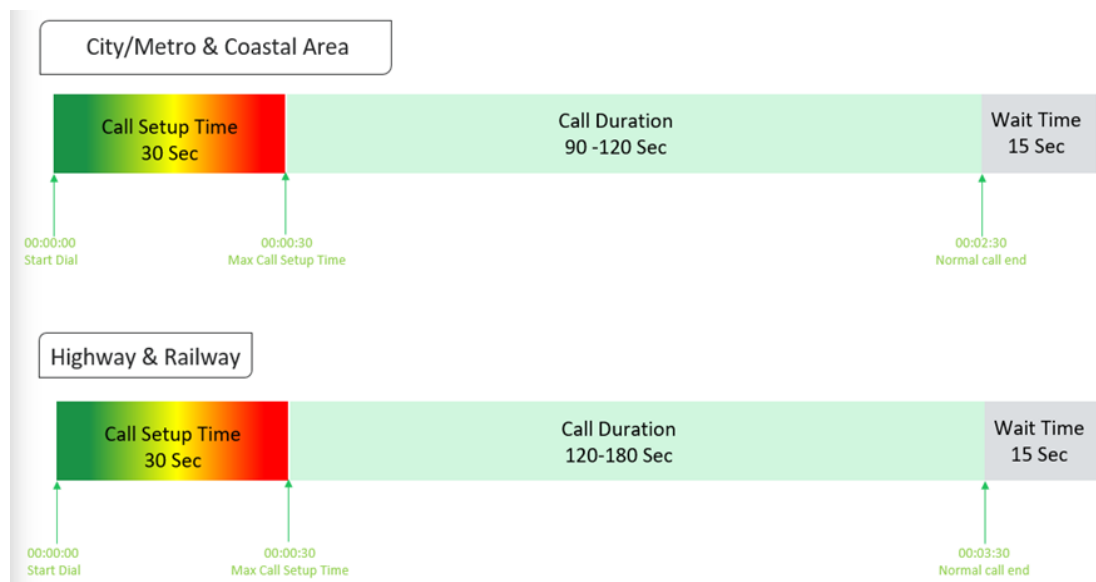


Figure-76: Voice test script for city/railway/metro/Airport route & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.
- Speech quality (MOS) will be measured only City & Airport route drive by making Mobile to Mobile calls.

(b) Hotspot voice testing



Figure-77: Voice test script for walktest/hotspot

- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.

(c) Dynamic Data (internet) test

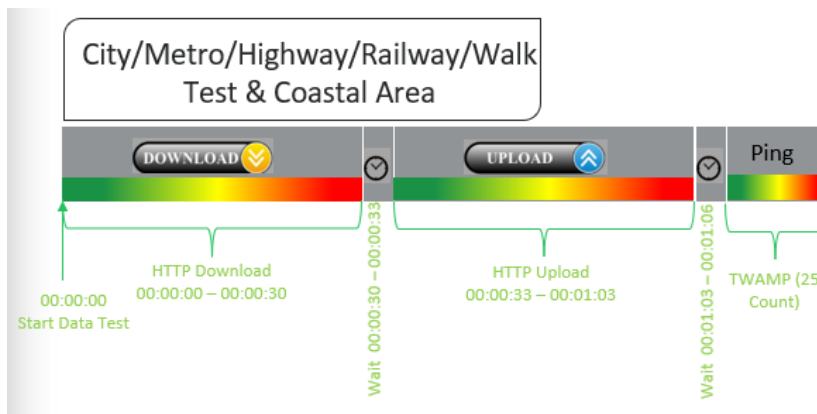


Figure-78: Data test script used in city/metro/railway/Airport route/walk test & coastal area

(d) Static Data(internet) testing

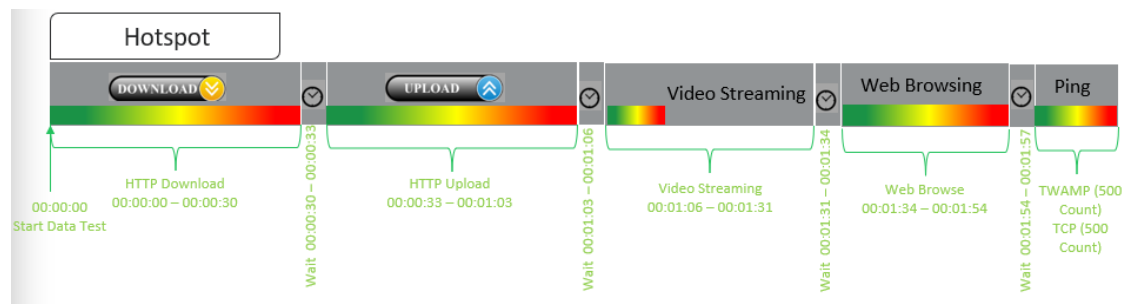


Figure-79: Data test script used at hotspot

- 5 Data iteration done at each hotspot location
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- One ping iteration (with 500 Count of each- TWAMP & TCP) done at hotspot location.

7.2 Appendix-II

7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
Call Setup Success Rate	<p>(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup:</p> <ul style="list-style-type: none"> (a) Call attempt is made (b) The signaling channel is allocated (c) The call is routed to the outwards path of the terminating network (d) An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement. <p>CSSR = (Total Call Established/ Total Call Attempt) *100</p> <p>As per QoS Regulation 2024 benchmark value is >=98%</p>
Drop Call Rate	<p>Call drop represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network</p> <p>Drop Call Rate = (Total Call Drop/Total Call Established) *100</p> <p>As per QoS Regulation 2024 benchmark value is <=2%</p>
Call Setup Time	<p>Time taken from call initiate to call alerting/ringing.</p> <p>Call Setup Time = T2- T1</p> <p>T2- Ringing (VoLTE/VoNR) & Alerting (for WCDMA & GSM), T1- Invite (VoLTE/VoNR) & CM Service Request (for WCDMA & GSM)</p>
Voice Quality (MOS)	<p>Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as:</p> <p>Excellent: MOS ≥ 4 and < 5 Good : MOS ≥ 3 and < 4 Fair : MOS ≥ 2 and < 3 Poor : MOS ≥ 1 and < 2</p>
Handover Success Rate	<p>Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100</p> <p>Handover type which are considered- 2G Inter & Intra cell, 3G Soft & IRAT, 4G Inter & Intra frequency & SRVCC, 5G Inter & Intra frequency & 5G to 4G handovers.</p>
Silence Call	<p>A call which has ≥ 4 sec continuous RTP gap is considered as a Silence Call.</p> <p>Silence call rate = (count of silence call / Total calls established) *100</p> <p>If a call observes multiple silence count ≥ 4 sec in a particular established call it has been taken as one silent event.</p>

Jitter	<p>The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If S_i is the RTP timestamp from packet i, and R_i is the time of arrival in RTP timestamps units for packet i, then for two packets i and j the inter-arrival jitter D can be expressed as: $D(i,j) = (R_j - R_i) - (S_j - S_i)$</p> <p>The interarrival jitter is calculated continuously as each data packet i is received from source $SSRC_n$, using this difference D for that packet and the previous packet $i-1$ in order of arrival (not necessarily in sequence), according to the formula $J(i) = J(i-1) + (D(i-1,i) - J(i-1))/16$ or 8</p>																																		
Downlink Packet Drop Rate	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).</p>																																		
Uplink Packet Drop Rate	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).</p>																																		
Signal Strength	<p>Signal strength is the signal power level received by the wireless user.</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Parameter Name</th> <th rowspan="2">Technology</th> <th colspan="4">Signal Strength (dBm)</th> </tr> <tr> <th style="background-color: #92D050;">Excellent</th> <th style="background-color: #FFD700;">Good</th> <th style="background-color: #4682B4;">Fair</th> <th style="background-color: #FF0000;">Poor</th> </tr> </thead> <tbody> <tr> <td>Rx Level</td> <td>GSM</td> <td>0 to \geq -65</td> <td><-65 to \geq-75</td> <td><-75 to \geq-85</td> <td><-85 to min</td> </tr> <tr> <td>RSCP</td> <td>WCDMA</td> <td>0 to \geq -70</td> <td><-70 to \geq-80</td> <td><-80 to \geq-90</td> <td><-90 to min</td> </tr> <tr> <td>RSRP</td> <td>LTE</td> <td>0 to \geq -80</td> <td><-80 to \geq-95</td> <td><-95 to \geq-110</td> <td><-110 to min</td> </tr> <tr> <td>SS_RSRP</td> <td>NR</td> <td>0 to \geq -80</td> <td><-80 to \geq-95</td> <td><-95 to \geq-110</td> <td><-110 to min</td> </tr> </tbody> </table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to \geq -65	<-65 to \geq -75	<-75 to \geq -85	<-85 to min	RSCP	WCDMA	0 to \geq -70	<-70 to \geq -80	<-80 to \geq -90	<-90 to min	RSRP	LTE	0 to \geq -80	<-80 to \geq -95	<-95 to \geq -110	<-110 to min	SS_RSRP	NR	0 to \geq -80	<-80 to \geq -95	<-95 to \geq -110	<-110 to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to \geq -65	<-65 to \geq -75	<-75 to \geq -85	<-85 to min																														
RSCP	WCDMA	0 to \geq -70	<-70 to \geq -80	<-80 to \geq -90	<-90 to min																														
RSRP	LTE	0 to \geq -80	<-80 to \geq -95	<-95 to \geq -110	<-110 to min																														
SS_RSRP	NR	0 to \geq -80	<-80 to \geq -95	<-95 to \geq -110	<-110 to min																														

Table-77: Network performance parameter and definition voice

7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
Download Speed (Mbps)	<p>The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device.</p> <p>Download Speed = Total bytes transferred during download / Total time for transfer</p> <ul style="list-style-type: none"> 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for download throughput in dynamic drive and Hotspot combine data
Upload Speed (Mbps)	<p>The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server.</p> <p>Upload Speed = Total bytes transferred during upload / Total time for transfer.</p> <ul style="list-style-type: none"> 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for upload throughput in dynamic drive and Hotspot combine data.
Download Session Setup Success Rate	<p>(total download session established (successfully connected to server)/ total download session attempt) *100. This KPI has been calculated for Hotspot only.</p>

Upload Session Setup Success Rate	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
Web Page Download Time	Web browsing test is used to measure performance in terms of opening a web/HTTP page. Time taken to open the web page successfully is considered as web browsing delay/web page download time.
Video Streaming Delay	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
Latency (TWAMP-UDP)	Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again. The Latency is measured in milliseconds (ms). To calculate the one-way latency, we just do half of the round-trip time. 50th percentile of one-way latency has been reported.
Jitter (TWAMP-UDP)	Measure of variation in time in arrival of packets from a source to destination The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL $IPDV(i) = D(i) - D(i-1)$ then Stdvs of IPDV is considered as jitter.
Packet Loss Rate (TWAMP-UDP & TCP)	Number of packets lost out of total packet transferred during test. Packet loss rate = (Total packet lost / Total packet sent) *100 * Packet delay (using TWAMP-UDP & TCP) >90 ms considered as packet loss and included in packet loss rate. * Packet loss rate is calculated based on TWAMP-UDP & TCP. *90 th percentile for Packet loss rate has been reported in overall Hotspot performance summary.

Table-78: Network performance parameter and definition Data

Disclaimer: The observations presented above and, in the reports, represent the performance of the service providers on the area/route under test on the day/time of conducting the drive test and no inference whatsoever may be drawn regarding the quality of the telecom service by the service providers in the whole city/state/licensed service area.

Hardik
Rajeshbhai
Patel

Digitally signed by
Hardik Rajeshbhai
Patel
Date: 2026.05.08
16:50:11 +05'30'