



TELECOM REGULATORY AUTHORITY OF INDIA

Independent Drive Test Report

West Bengal LSA

August 2026

Contents

1. Introduction	3
2. Executive Summary (LSA)	3
2.1 Drive test details	3
2.2 Drive test routes	4
2.3 Summary of areas covered	4
2.4 Telecom service providers detected frequency bands	5
2.5 Key findings of Independent Drive Test.....	5
3. QoS performance analysis-LSA level.....	7
3.1 Overview.....	8
3.2 Voice performance.....	8
3.3 Data performance.....	11
4. Detailed QoS performance analysis	13
4.1 Overview.....	13
4.2 City	13
4.2.1 Drive test route.....	13
4.2.2 Areas covered	13
4.2.3 Voice performance.....	14
4.2.4 Data performance.....	28
4.3 Hotspots	36
4.3.1 Locations.....	36
4.3.2 Hotspot covered	36
4.3.3 Voice performance.....	37
4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)	39
4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)	42
4.4 Walk Test	45
4.4.1 Walk test locations	45
4.4.2 Walk Test Covered.....	45
4.4.3 Voice Performance.....	45
4.4.4 Data Performance.....	47
4.5 Coastal	49
4.5.1 Drive test route.....	49
4.5.2 Routes Covered.....	49
4.5.3 Voice performance.....	49
4.5.4 Data performance.....	57

5. Voice & Data Key findings	65
5.1 Overall Voice.....	65
5.2 Overall Data	65
5.3 Operator wise Key Findings.....	66
6. Annexure	70
6.1 Route wise coverage map	70
6.1.1 City	70
6.1.2 Coastal.....	75
7. Appendix	80
7.1 Appendix-I	80
7.1.1 Drive test setup	80
7.1.2 Drive test Methodology	82
7.2 Appendix-II	84
7.2.1 Network Performance Parameters for Voice calls	84
7.2.2 Network Performance Parameters Data tests	85

1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet the required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interests of the consumers of telecommunications services.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

2. Executive Summary (LSA)

2.1 Drive test details

This report covers the findings of the IDT undertaken in West Bengal License Service Area (LSA) during the month of August-2026 under the supervision of TRAI Regional Office (RO) Kolkata. Details of route/area covered during the IDT are as given below:

S. No	Drive test route	Type of route	Distance covered (KMs)	From date	To date
1	South Andaman District	City	259.8	17-August-2026	19-August-2026
2	Port Blair (Sri Vijaya Puram)	Inter Operator Calling	1 Location	19-August-2026	19-August-2026
3	South Andaman District	Hotspot	10 Locations	17-August-2026	21-August-2026
4	Port Blair (Sri Vijaya Puram)	Walk test	1.1	19-August-2026	19-August-2026
5	Port Blair (Sri Vijaya Puram) to Havelock (Swaraj Dweep)	Coastal	52.8	20-August-2026	20-August-2026

Table-1: Drive test summary.

2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, Inter-operator call test, hotspots, walk test and coastal as per the legends shown on the map.

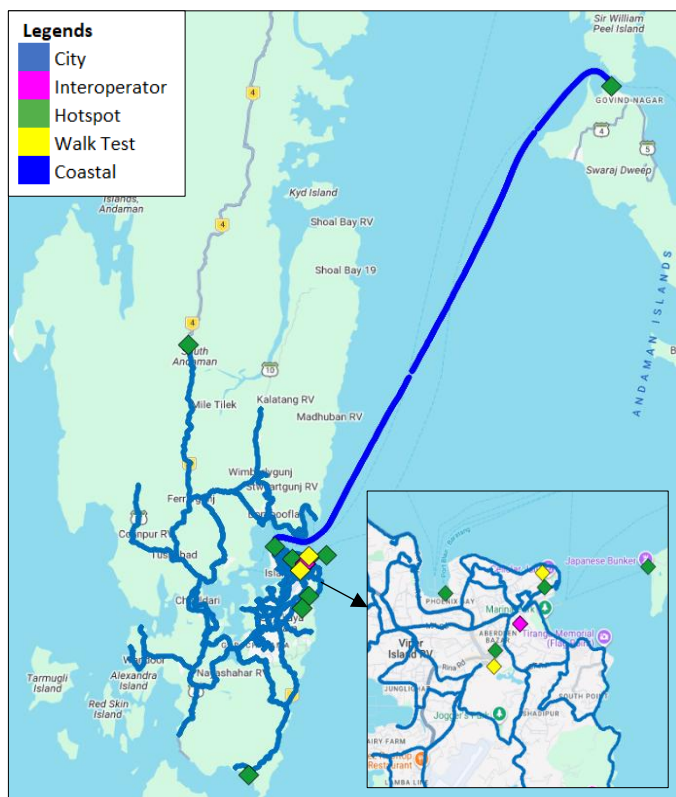


Figure-1: Drive test routes.

2.3 Summary of areas covered

- a) City-** South Andaman, Beach Dera, Ferrargunj, Tirur, Mala Puram, Wimberlygunj, Bombooflat, Tusnabad, Chouldari, Wandoor, Manjery, Nayashahar RV, Sri Vijaya Puram, Viper Island RV and Chidiya Tapu Beach etc.
- b) Hotspot**
 1. Carvins Cove Beach
 2. Cellular Jail
 3. Chidiyatapu Sunset Point - Sri Vijaya Puram
 4. Haddo Jetty - Chatham Jetty Haddo - Sri Vijaya Puram
 5. Havelock Jetty
 6. Head Post Office Port Blair - Aberdeen Bazar Shadipur - Sri Vijaya Puram
 7. Jirkatang Check Post
 8. NSCB Island Jetty - Ross Island Rd
 9. Phoenix Bay Jetty - Sri Vijaya Puram
 10. Pondicherry University Port Blair Campus - Chakargaon Junglighat - Sri Vijaya Puram
- c) Walk Test**
 1. G. B. Pant Hospital - Atlanta Point - Sri Vijaya Puram
 2. High Court and DC Office - Sri Vijaya Puram
- d) Coastal-** Port Blair (Sri Vijaya Puram) to Havelock (Swaraj Dweep)

2.4 Telecom service providers detected frequency bands

Technologies covered during the IDT and frequency bands in use are summarised in table below:

S.no.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	900
2	Bharti Airtel Ltd.	4G	900,1800,2100,2300
3	Bharti Airtel Ltd.	5G	3500
4	BSNL	2G	900
5	BSNL	4G	700,2100,2500
6	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
7	Reliance JIO Infocomm Ltd.	5G	700,3500
8	Vodafone Idea Ltd.	2G	900
9	Vodafone Idea Ltd.	4G	1800

Table-2: Telecom service provider (TSP) covered in IDT.

2.5 Key findings of Independent Drive Test

- 1. Drive Test Area:** The overall mobile network performance across South Andaman district (West Bengal LSA) for the key Parameters has been summarized below:

- a) Coverage Gap** - The signal strength observed during voice testing on the drive test route in auto-selection mode (5G/4G/3G/2G). (refer figure- 29 to 32)

Parameter	AIRTEL	BSNL	RJIL	VIL
Total Number of Samples captured on Drive test route	37333	37623	38739	36434
Number of Samples having poor signal strength	4734	9228	5123	15927
Number of Samples having limited service (No Coverage)	1008	888	466	1322

- b) Dropped Calls** – The TSP-wise details of dropped calls in auto selection mode (5G/4G/3G/2G). (refer figure-15 to 18)

Parameter	AIRTEL	BSNL	RJIL	VIL
Number of successful Calls Established	266	268	285	262
Number of dropped Calls	5	38	9	8

- c) Call Silence Instance** - The TSP-wise details of Call silence instance in Auto-selection mode (5G/4G). (refer figure-19 & 22)

Parameter	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider network)	264	265	264	143
Number of silences calls for >3 Sec	14	23	23	10
Total number of silence instances for >3 Sec	23	30	33	13

- d) Packet loss rate Downlink & Uplink-** The TSP-wise details of packet loss rate in downlink & uplink for Auto-selection mode (5G/4G).

Parameter	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider network)	264	265	264	143
Packet loss Rate Downlink %	2.03	5.12	4.77	2.46
Packet loss Rate Uplink %	2.20	4.50	3.55	2.48

- e) Data Download and Upload Throughput:**

- i) Data Download Throughput:** The TSP-wise details of **Average Download (DL) throughput** against declared typical DL Throughput for month, in Auto-selection mode (5G/4G/3G/2G). (refer figure- 34 to 37)

Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 4G)
Typical Download Throughput declared by TSP	(Mbits/s)	23.00	5.00	15.00	15.00
Average Download Throughput measured during IDT	(Mbits/s)	67.06	7.18	77.61	26.54

ii) **Data Upload Throughput:** The TSP-wise details of **Average Upload (UL) throughput** against declared typical UL Throughput for month, in Auto-selection mode (5G/4G/3G/2G). (refer figure- 38 to 41)

Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 4G)
Typical Upload Throughput declared by TSP	(Mbits/s)	10.00	3.00	7.00	8.00
Average Upload Throughput measured during IDT	(Mbits/s)	18.01	6.13	20.28	10.84

2. **Drive Test Route:** The overall mobile network performance on Port Blair (Sri Vijaya Puram) to Havelock (Swaraj Dweep) coastal route (West Bengal LSA) for the key Parameters has been summarized below:

a) **Coverage Gap-** The signal strength observed during voice testing on the drive test route in auto-selection mode (5G/4G/3G/2G). (refer figure- 66 to 69)

Parameter	AIRTEL	BSNL	RJIL	VIL
Total Number of Samples captured on Drive test route	5262	5012	4881	3854
Number of Samples having poor signal strength	1897	1839	1972	2254
Number of Samples having limited service (No Coverage)	0	93	68	363

b) **Dropped Calls** - The TSP-wise details of dropped calls in auto selection mode (5G/4G/3G/2G). (refer figure-58 to 60)

Parameter	AIRTEL	BSNL	RJIL	VIL
Number of successful Calls Established	37	29	36	27
Number of dropped Calls	1	1	2	0

c) **Data Download and Upload Throughput:**

i) **Data Download Throughput:** The TSP-wise details of **Average Download (DL) throughput** against declared typical DL Throughput for month, in Auto-selection mode (5G/4G/3G/2G). (refer figure- 71 to 74)

Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 4G)
Typical Download Throughput declared by TSP	(Mbits/s)	23.00	5.00	15.00	15.00
Average Download Throughput measured during IDT	(Mbits/s)	17.07	4.03	34.93	28.99

ii) **Data Upload Throughput:** The TSP-wise details of **Average Upload (UL) throughput** against declared typical UL Throughput for month, in Auto-selection mode (5G/4G/3G/2G). (refer figure- 75 to 78)

Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 4G)
Typical Upload Throughput declared by TSP	(Mbits/s)	10.00	3.00	7.00	8.00
Average Upload Throughput measured during IDT	(Mbits/s)	5.27	4.46	7.95	10.93

QoS Performance Analysis- West Bengal LSA

3. QoS performance analysis-LSA level

3.1 Overview

This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the West Bengal LSA during the month of August-2026 covering city drive, hotspots, walk test and coastal. (Refer Table 1)

3.2 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	303	313	296
Call Setup Success Rate %	86.47	85.62	90.20
Drop Call Rate %	3.44	9.70	4.12
Call Setup Time-Average (Second)	4.86	9.37	4.85
Handover Success Rate %	98.21	89.15	100.00

Table-3: Summary of voice call performance in 3G/2G network mode only.

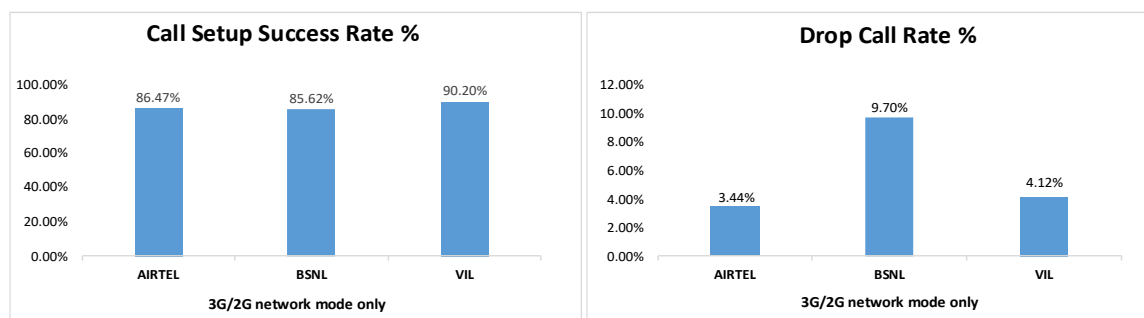


Figure-2: Call setup success rate and drop call rate performance.

Number of unique cell Id's covered in Voice test- Technology wise			
Technology	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
3G	NA	0	NA
2G	215	179	144

Table-4: Technology wise number of network cell Id's latched during drive test.

Note-

- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.

(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	462	511	463	477
Call Setup Success Rate %	88.10	81.21	96.33	81.13
Drop Call Rate %	1.47	9.40	2.69	2.07
Call Setup Time-Average (Second)	2.10	8.16	1.17	2.75
Handover Success Rate %	100.00	92.04	99.80	99.88

Table-5: Summary of voice call performance in network auto-selection mode.

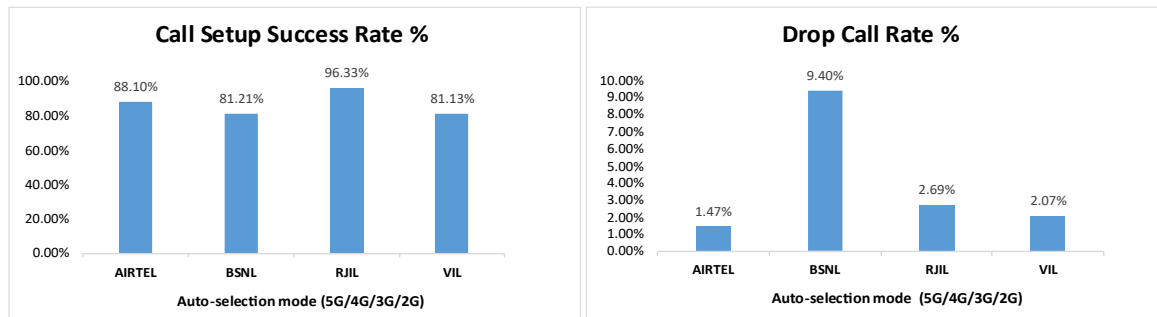


Figure-3: Performance for call setup success rate and drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G – Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	264	265	264	143
Number of silences call for >4 Sec	11	11	21	8
Silence Call Rate %	4.17	4.15	7.95	5.59
Number of silence instances for >4 Sec	19	14	28	9
Number of silence instances for >3 Sec	23	30	33	13
Number of silence instances for >2 sec	34	65	63	38
RTP Jitter (4G & 5G) in ms	6.73	7.17	15.78	10.70
Packet loss Rate Downlink %	2.03	5.12	4.77	2.46
Packet loss Rate Uplink %	2.20	4.50	3.55	2.48

Table-6: Summary of silence instances & packet loss rate for mobile to mobile calls.

Number of unique cell Id's covered in Voice test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	178	NA
4G	603	323	388	76
3G	NA	0	NA	NA
2G	9	156	NA	108

Table-7: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

(c) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile-to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls table-6	2235	1799	2174	1177
Speech Quality (Average MOS)	3.91	2.61	4.29	4.37
Number of samples with MOS ≥ 4 to < 5 (Excellent)	1721	0	1827	997
Number of samples with MOS ≥ 3 to < 4 (Good)	388	762	128	113
Number of samples with MOS ≥ 2 to < 3 (Fair)	55	609	36	34
Number of samples with MOS ≥ 1 to < 2 (Poor)	71	428	183	33
%age of samples with MOS ≥ 4 to < 5 (Excellent)	77.00%	0.00%	84.04%	84.71%
%age of samples with MOS ≥ 3 to < 4 (Good)	17.36%	42.36%	5.89%	9.60%
%age of samples with MOS ≥ 2 to < 3 (Fair)	2.46%	33.85%	1.66%	2.89%
%age of samples with MOS ≥ 1 to < 2 (Poor)	3.18%	23.79%	8.42%	2.80%

Table-8: Summary of speech quality (MOS) samples.

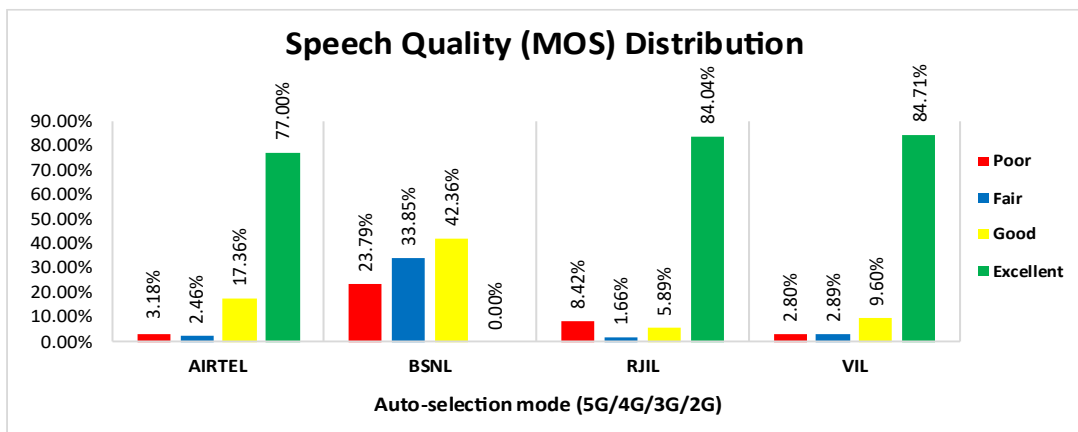


Figure- 4: Distribution of samples in MOS range.

(d) Inter-service provider voice call performance: To check the performance of inter-service providers call setup success rate, total 10 to 15 inter operator calls were attempted at one location which is Hotel Blue World. The call setup success rate and call setup time observation is as below.

Call Setup Success Rate %				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	100.00	100.00	50.00
BSNL	100.00	NA	100.00	80.00
RJIL	100.00	100.00	NA	100.00
VIL	100.00	100.00	100.00	NA

Table-9: Call setup success rate across service providers.

Note-

- NA- Only inter-operator calls were measured during test.

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	2.35	2.31	2.90
BSNL	2.62	NA	7.64	7.53
RJIL	2.25	3.31	NA	1.96
VIL	2.32	3.28	1.87	NA

Table-10: Call setup time across service providers.

Note-

- NA- Only inter-operator calls were measured during test.

3.3 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	59.57	7.27	66.49	30.76
	80 th Percentile	105.33	11.01	149.43	40.67
	20 th Percentile	13.42	2.58	5.12	10.08
Upload Throughput (Mbits/s)	Average	15.61	6.27	16.93	11.66
	80 th Percentile	28.79	10.55	29.66	22.10
	20 th Percentile	2.76	1.63	1.92	0.18
Latency (ms)	50 th Percentile	92.22	47.20	45.70	62.45

Table-11: Summary of data performance in network auto-selection mode.

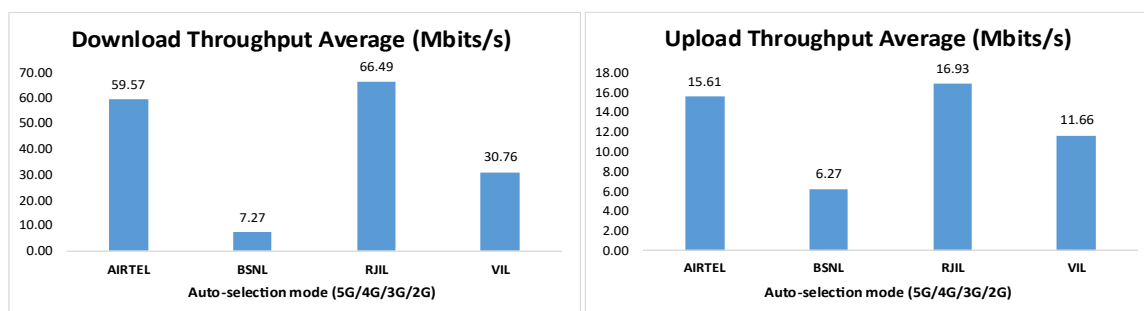


Figure- 5: Download and Upload throughput.

Number of unique cell Id's covered in Data test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	212	NA
4G	610	379	297	78
3G	NA	0	NA	NA
2G	24	30	NA	105

Table-12: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

Detailed QoS Performance Analysis

4. Detailed QoS performance analysis

4.1 Overview

This section covers analysis on performance of various categories of drives like city, hotspots, walk test and coastal for all telecom service providers, the results of drive tests conducted are shown individually for respective areas/locations.

4.2 City

Drive test has been conducted from 17th August 2026 to 19th August 2026 in South Andaman District. (Refer Table-1)

4.2.1 Drive test route



Figure- 6: Drive test routes.

4.2.2 Areas covered

South Andaman, Beach Dera, Ferrargunj, Tirur, Mala Puram, Wimberlygunj, Bombooflat, Tusnabad, Chouldari, Wandoor, Manjery, Nayashahar RV, Sri Vijaya Puram, Viper Island RV and Chidiya Tapu Beach etc.

4.2.3 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	303	313	296
Call Setup Success Rate %	86.47	85.62	90.20
Drop Call Rate %	3.44	9.70	4.12
Call Setup Time-Average (Second)	4.86	9.37	4.85
Handover Success Rate %	98.21	89.15	100.00

Table-13: Summary of voice call performance in 3G/2G network mode only.

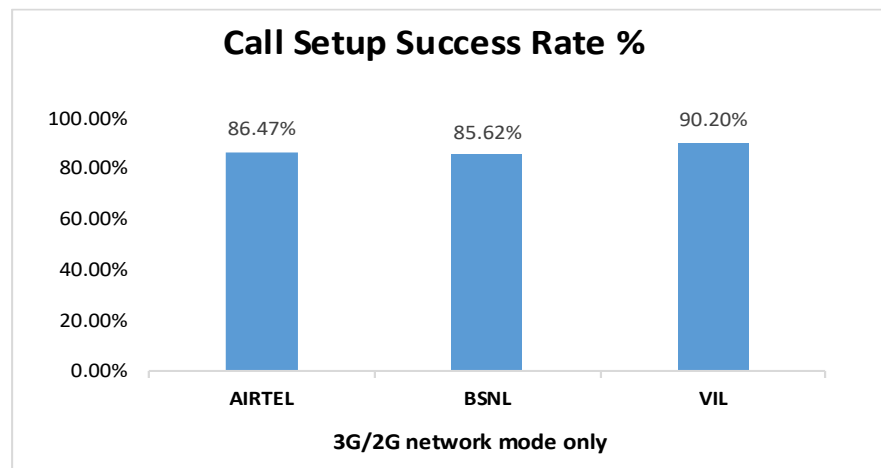


Figure-7: Performance for call setup success rate.

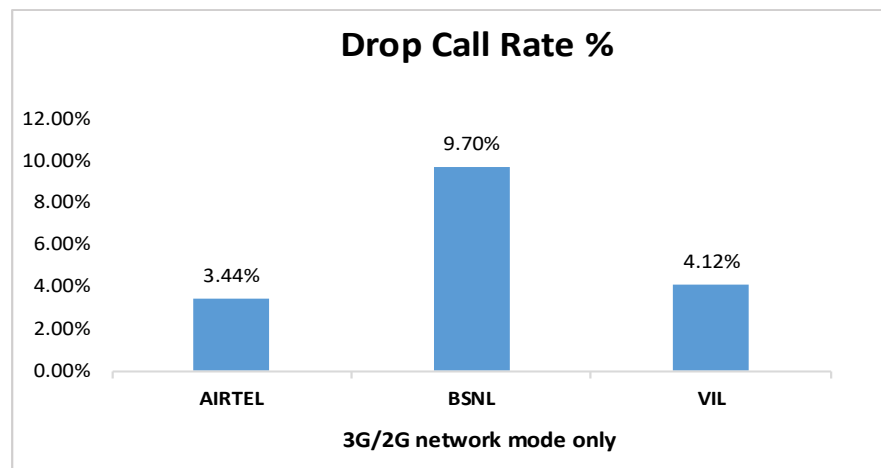


Figure-8: Performance for drop call rate.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	0.00%	NA
2G	98.14%	98.92%	98.82%
Limited Service	1.86%	1.08%	1.18%

Table-14: Time spent on technology during drive test 3G/2G network mode.

Note-

- NA- Service provider doesn't provide services in respective technology.

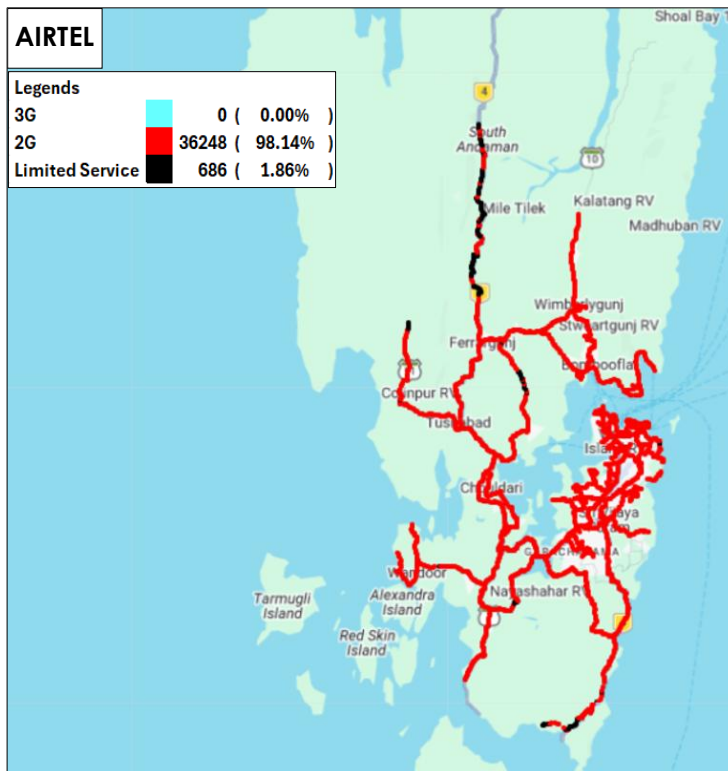


Figure-9: Serving technology plots 3G/2G network mode – AIRTEL.

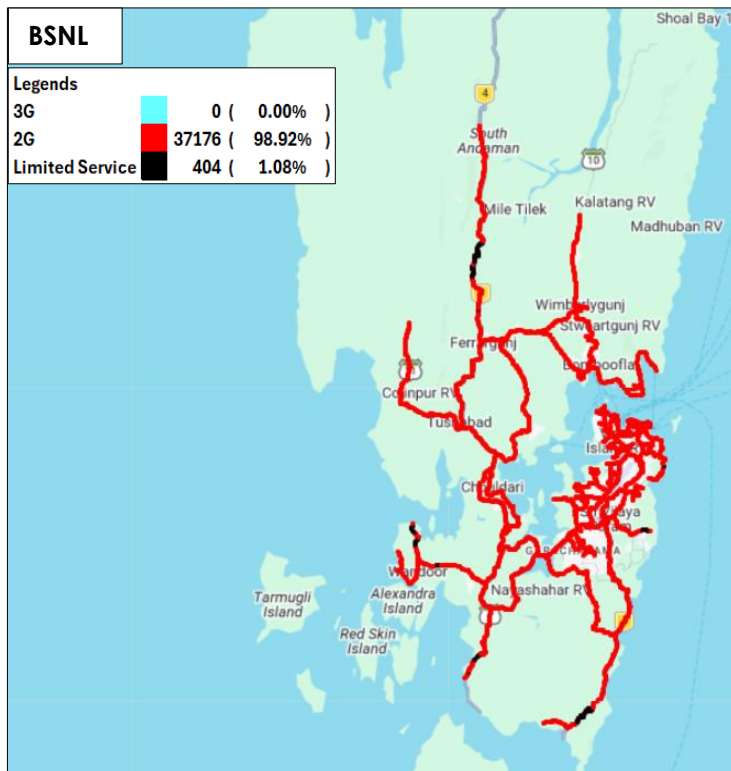


Figure-10: Serving technology plots 3G/2G network mode – BSNL.

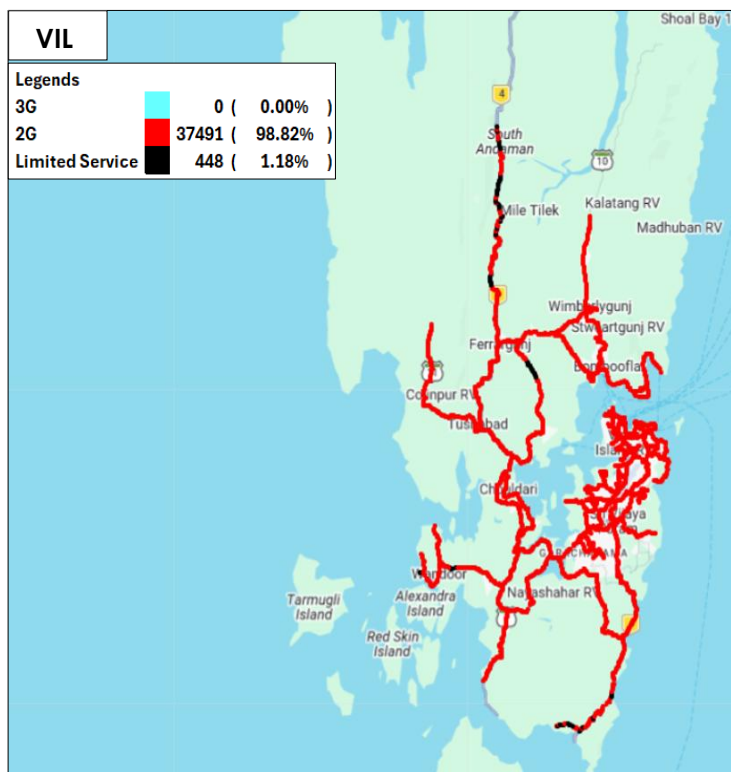


Figure-11: Serving technology plots 3G/2G network mode – VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 84, 85 & 86 for map view)

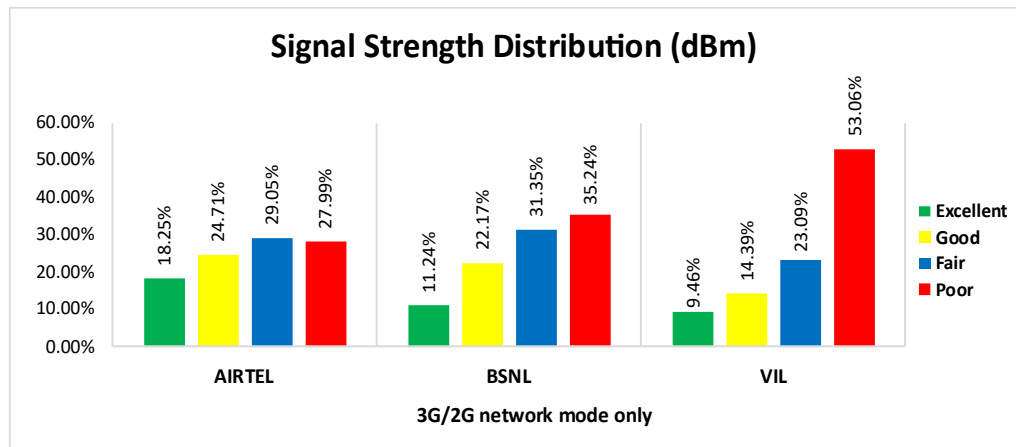


Figure-12: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 18% of samples falling in the excellent signal strength category.
- BSNL has 11% of samples falling in the excellent signal strength category.
- VIL has 9% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	300	334	298	305
Call Setup Success Rate %	88.67	80.24	95.64	85.90
Drop Call Rate %	1.88	14.18	3.16	3.05
Call Setup Time Average (Second)	2.07	8.39	1.17	3.25
Handover Success Rate %	100.00	89.49	99.85	99.86

Table-15: Summary of voice call performance in network auto-selection mode.

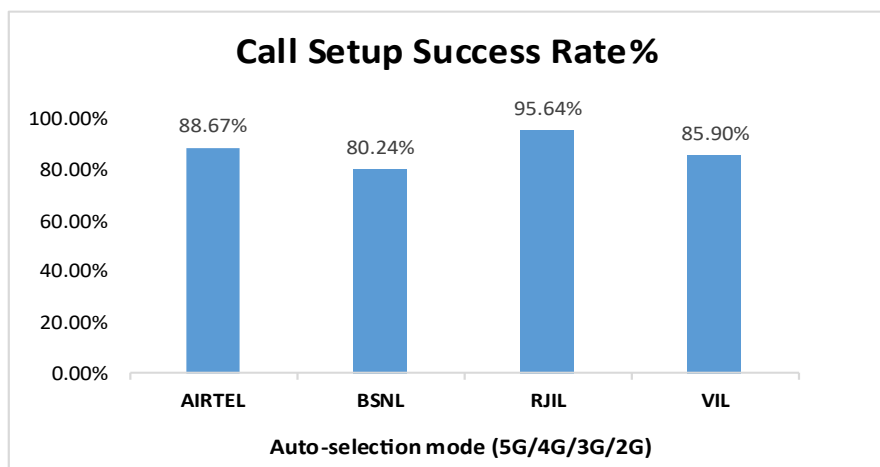


Figure-13: Performance for call setup success rate.

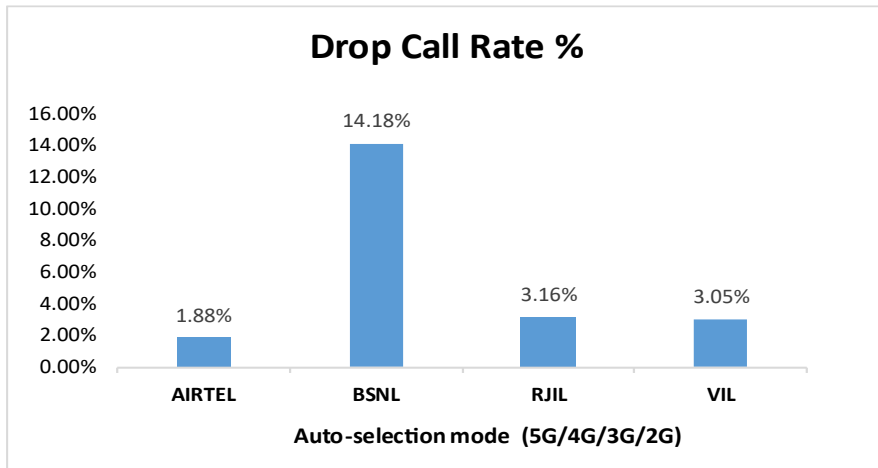


Figure-14: Performance for drop call rate.

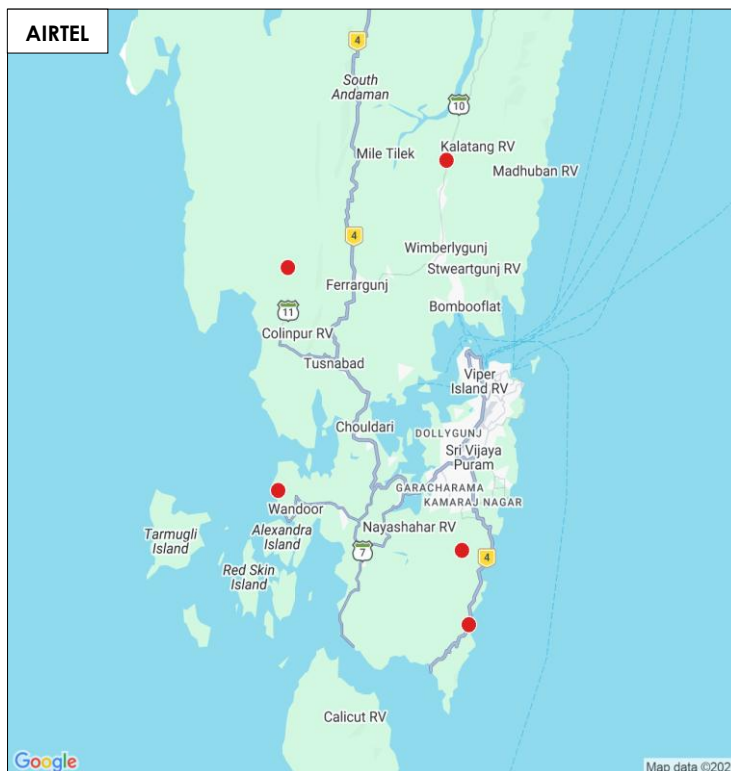


Figure-15: Drop call location in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.



Figure-16: Drop call location in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

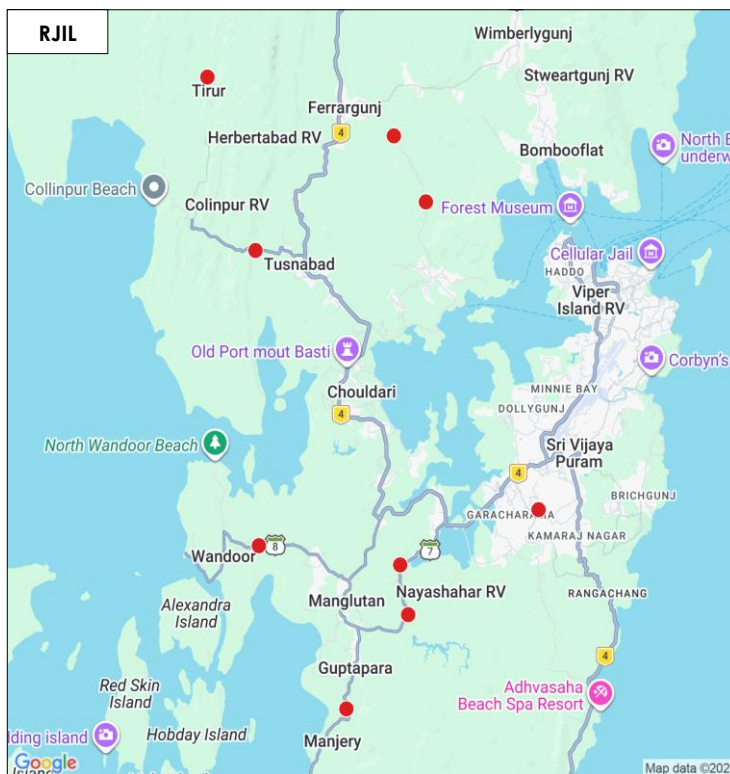


Figure-17: Drop call location in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

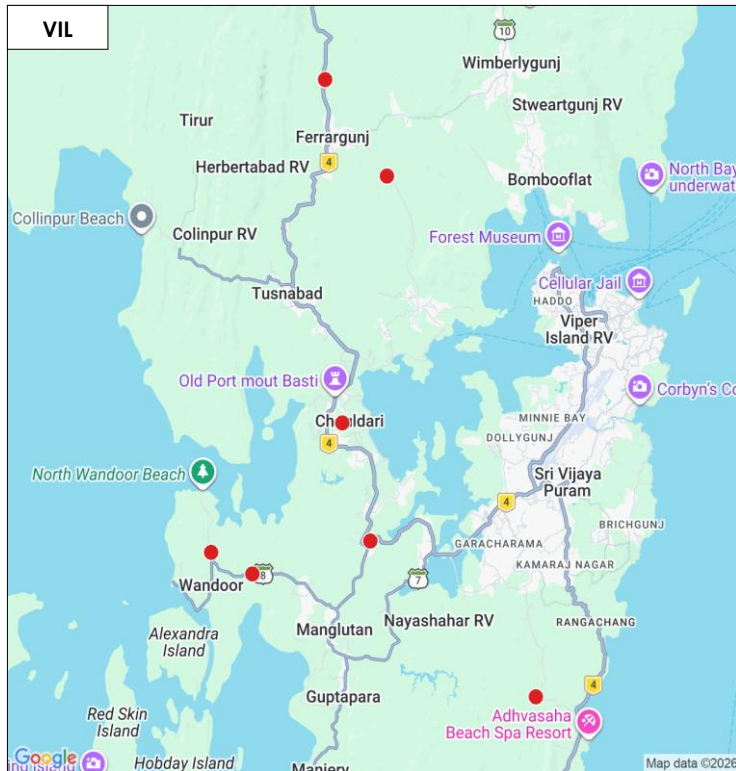


Figure-18: Drop call location in auto-selection mode (5G/4G/3G/2G) voice - VIL.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G – Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	264	265	264	143
Number of silences call for >4 Sec	11	11	21	8
Silence Call Rate %	4.17	4.15	7.95	5.59
Number of silence instances for >4 Sec	19	14	28	9
Number of silence instances for >3 Sec	23	30	33	13
Number of silence instances for >2 sec	34	65	63	38
RTP Jitter (4G & 5G) in ms	6.73	7.17	15.78	10.70
Packet loss Rate Downlink %	2.03	5.12	4.77	2.46
Packet loss Rate Uplink %	2.20	4.50	3.55	2.48

Table-16: Summary of silence instances & packet loss rate for mobile to mobile call.

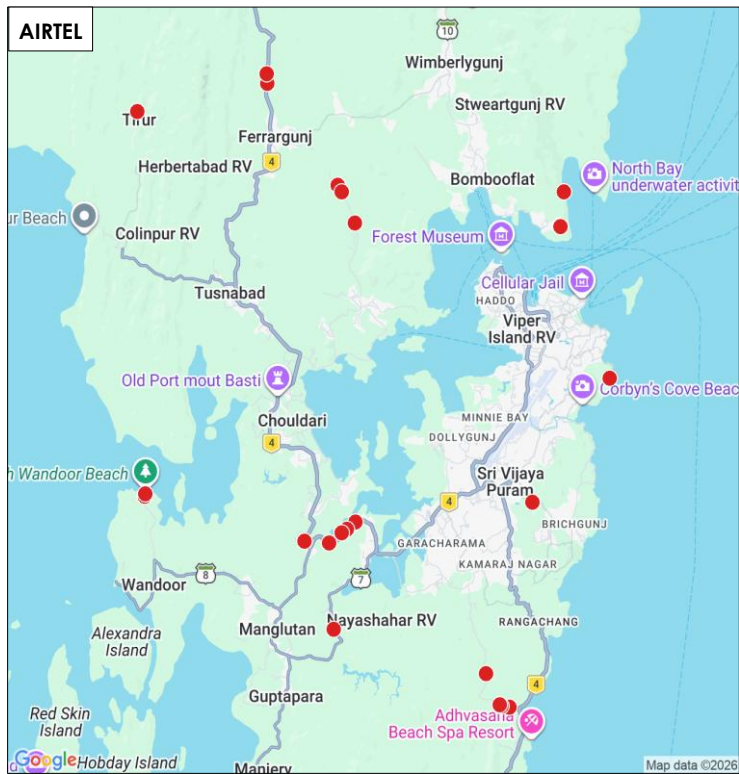


Figure-19: Number of silence instances for >3 Sec Mobile-to-Mobile (5G/4G-Open Mode)-AIRTEL.

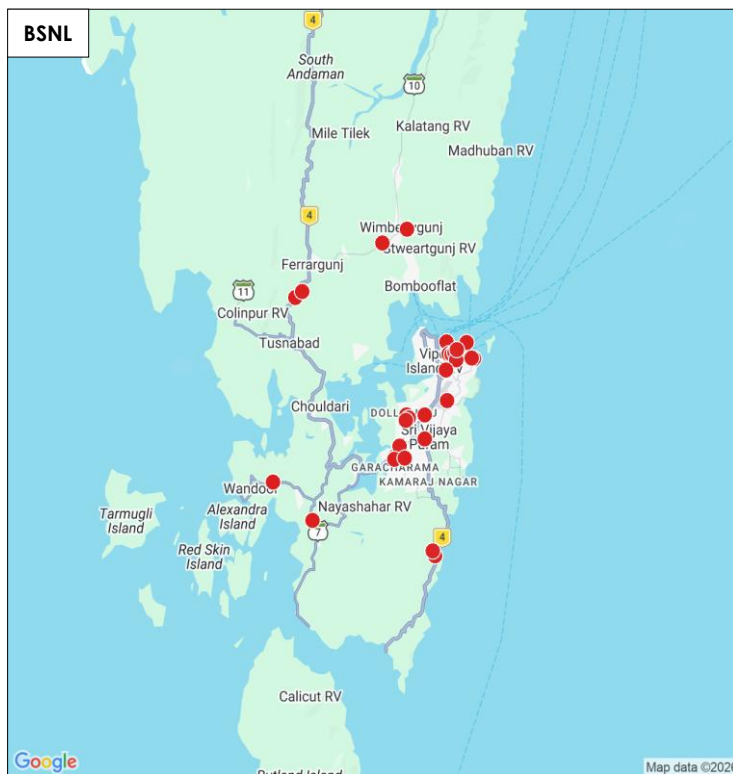


Figure-20: Number of silence instances for >3 Sec Mobile-to-Mobile (5G/4G-Open Mode)-BSNL.

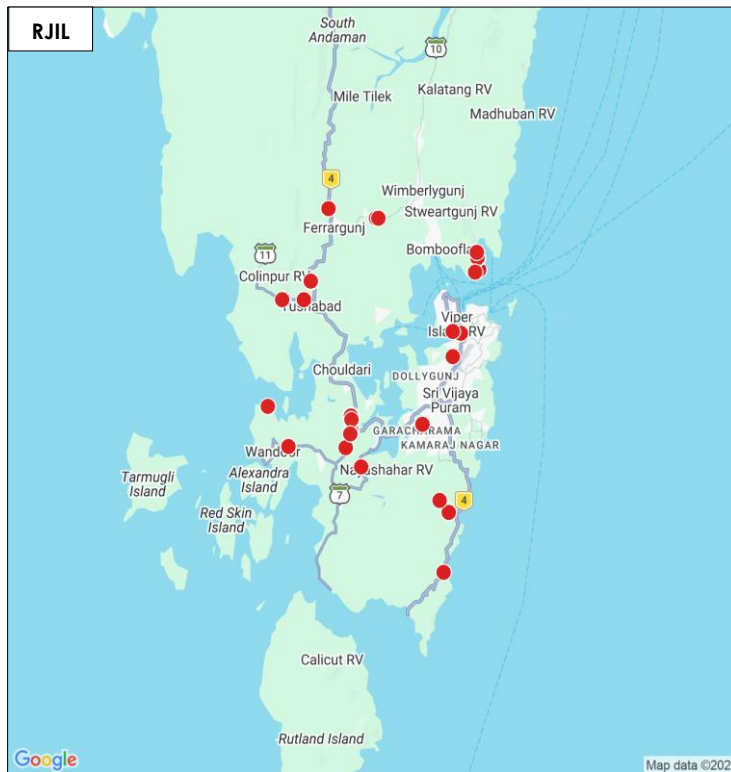


Figure-21: Number of silence instances for >3 Sec Mobile-to-Mobile (5G/4G-Open Mode)-RJIL.

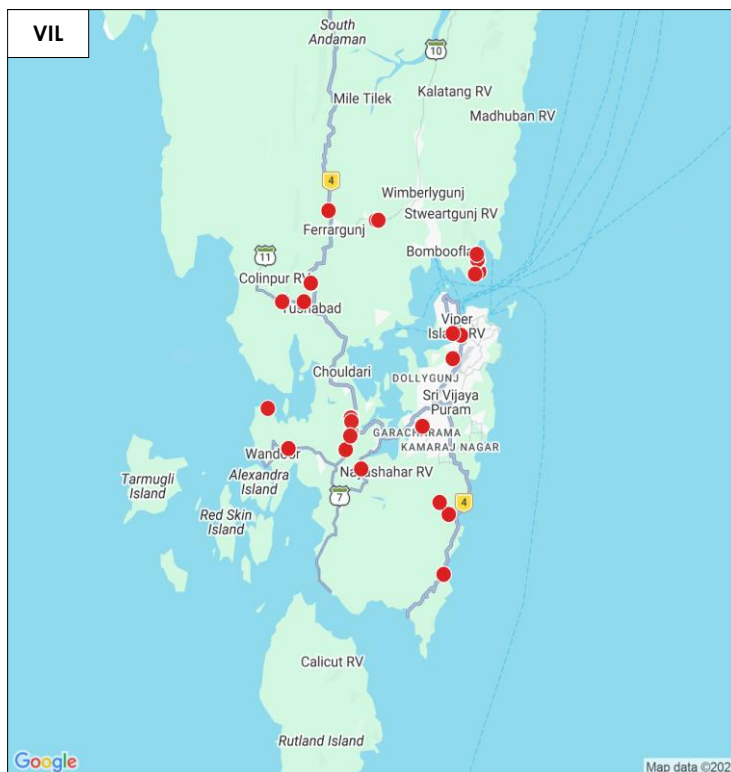


Figure-22: Number of silence instances for >3 Sec Mobile-to-Mobile (5G/4G-Open Mode)-VIL.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS value means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-16	2235	1799	2174	1177
Speech Quality (Average MOS)	3.91	2.61	4.29	4.37
Number of samples with MOS ≥ 4 to < 5 (Excellent)	1721	0	1827	997
Number of samples with MOS ≥ 3 to < 4 (Good)	388	762	128	113
Number of samples with MOS ≥ 2 to < 3 (Fair)	55	609	36	34
Number of samples with MOS ≥ 1 to < 2 (Poor)	71	428	183	33
%age of samples with MOS ≥ 4 to < 5 (Excellent)	77.00%	0.00%	84.04%	84.71%
%age of samples with MOS ≥ 3 to < 4 (Good)	17.36%	42.36%	5.89%	9.60%
%age of samples with MOS ≥ 2 to < 3 (Fair)	2.46%	33.85%	1.66%	2.89%
%age of samples with MOS ≥ 1 to < 2 (Poor)	3.18%	23.79%	8.42%	2.80%

Table-17: Summary of speech quality (MOS) samples.

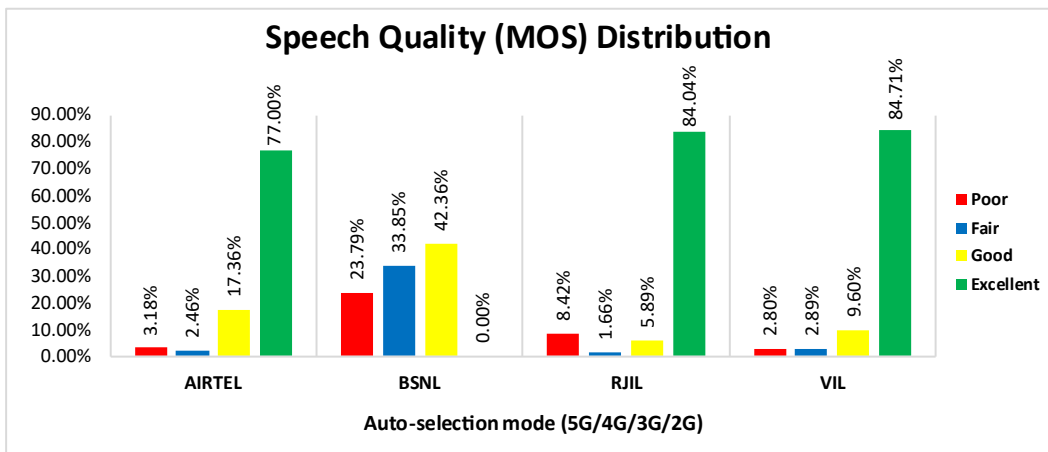


Figure-23: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	7.43%	NA	41.35%	NA
4G	89.86%	54.14%	57.50%	43.95%
3G	NA	0.00%	NA	NA
2G	0.16%	43.60%	NA	52.63%
Limited Service	2.54%	2.26%	1.15%	3.42%

Table-18: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice .

Note-

- NA- Service provider doesn't provide services in respective technology.

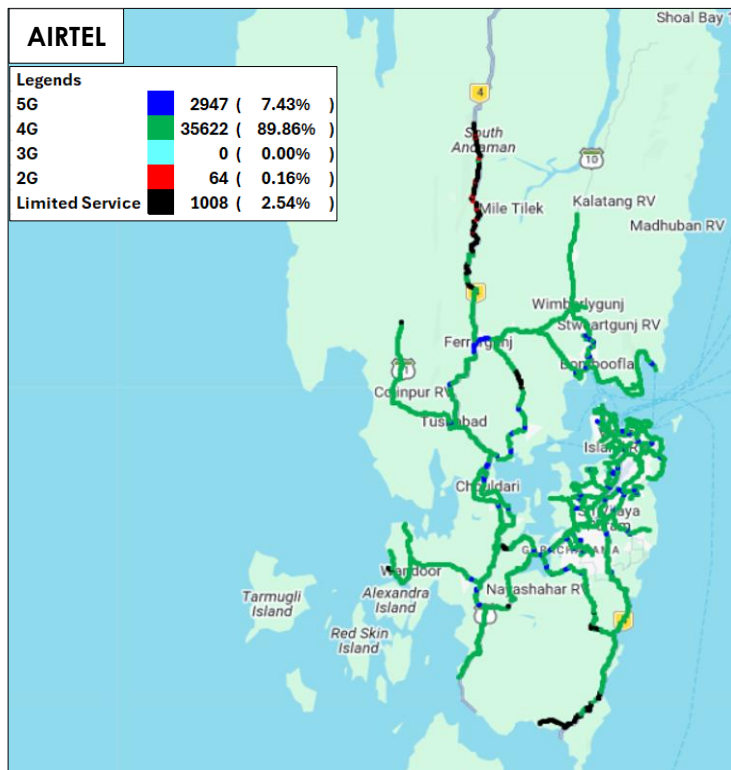


Figure-24: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

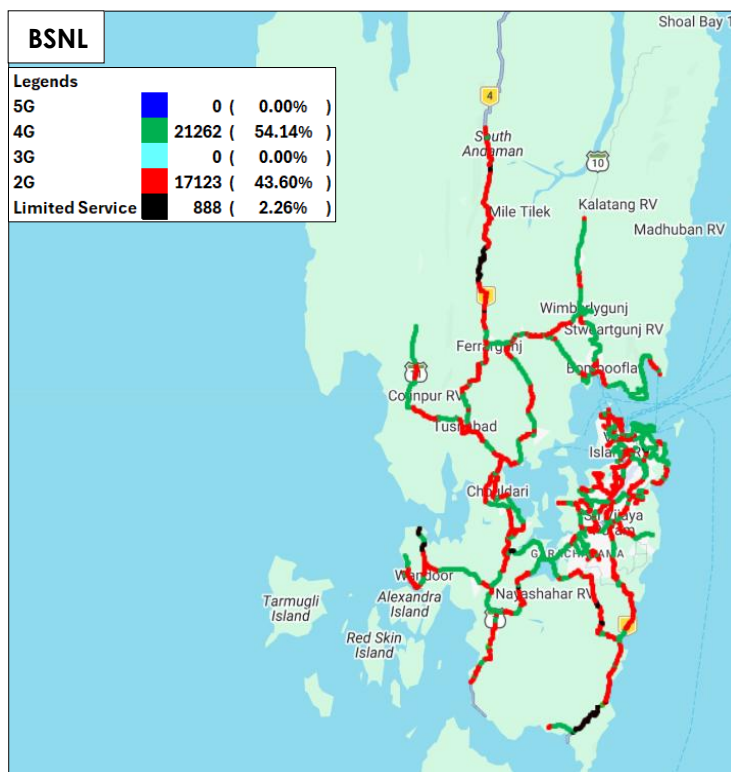


Figure-25: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

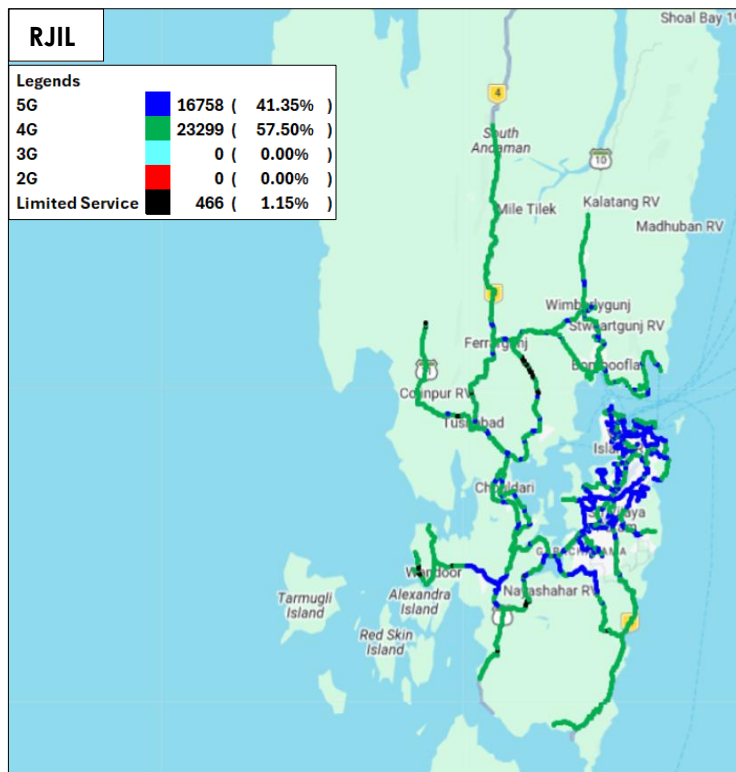


Figure-26: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

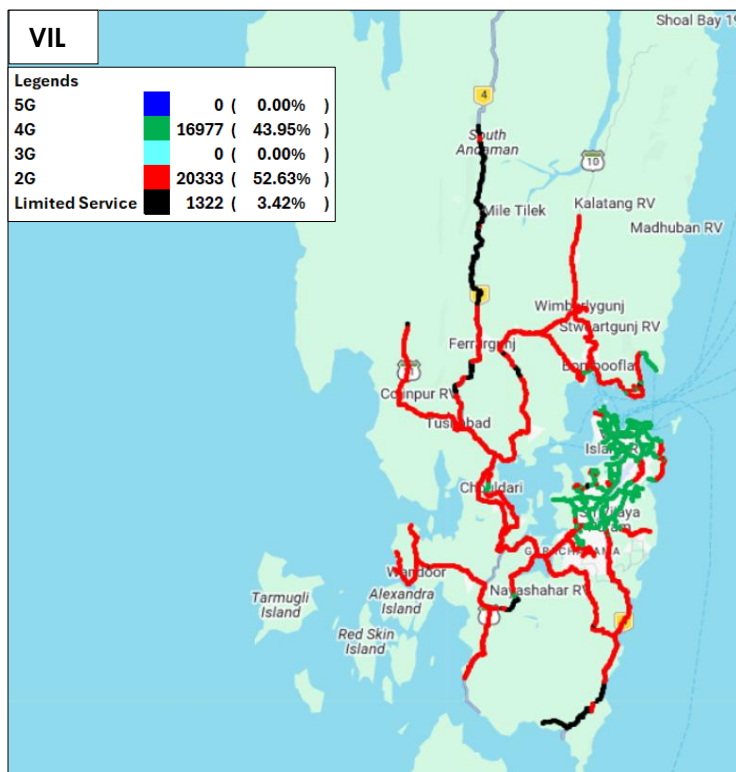


Figure-27: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice VIL.

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) voice. (Refer figure-87, 88, 89 & 90 for map view)

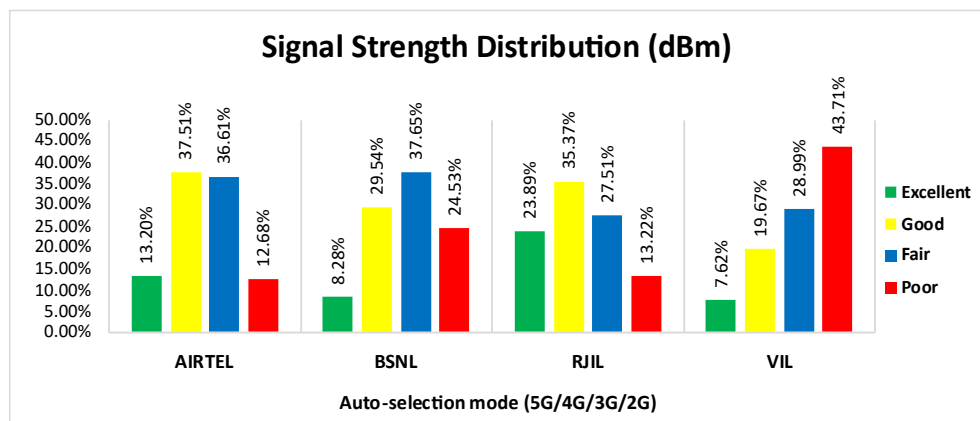


Figure-28: Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

Observations:

- Airtel has 13% of samples falling in the excellent signal strength category.
- BSNL has 8% of samples falling in the excellent signal strength category.
- RJIL has 24% of samples falling in the excellent signal strength category.
- VIL has 8% of samples falling in the excellent signal strength category.

(h) Coverage Gap observed

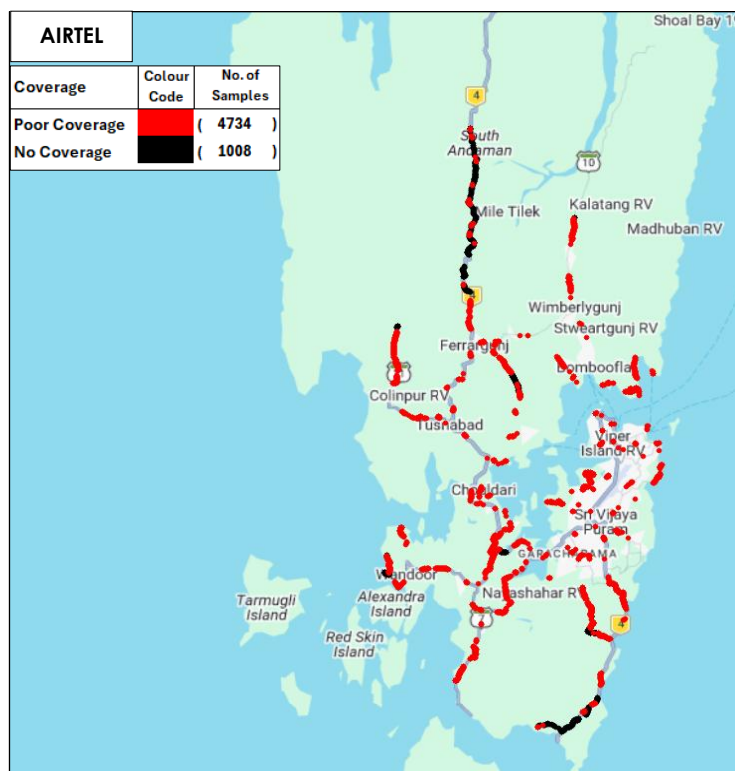


Figure-29: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice-Airtel.

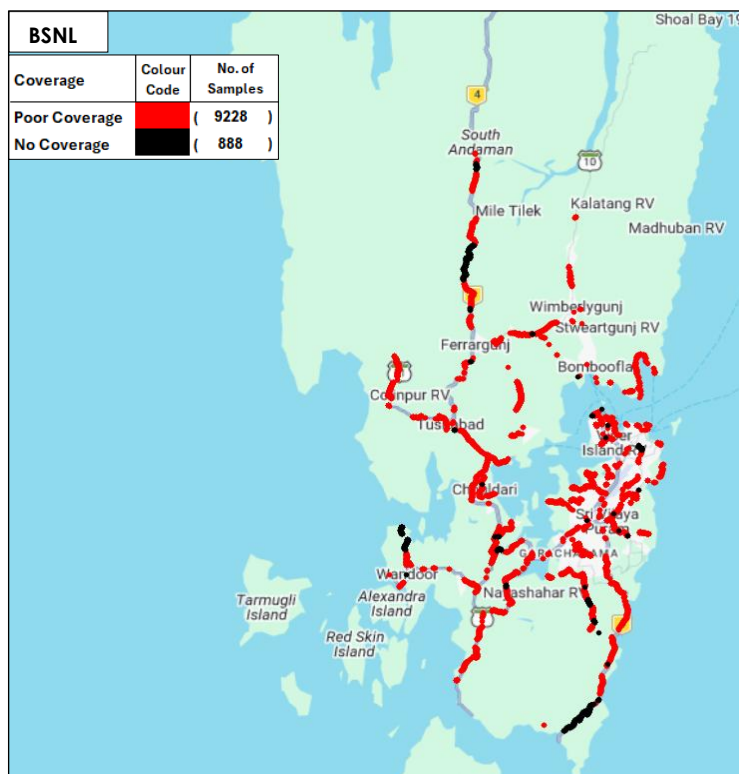


Figure-30: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice-BSNL.

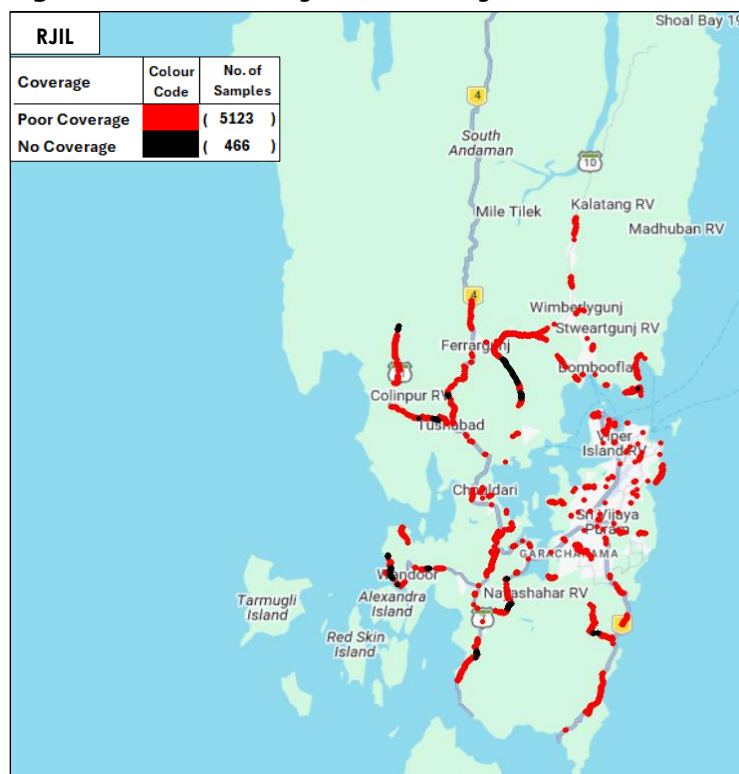


Figure-31: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice-RJIL.

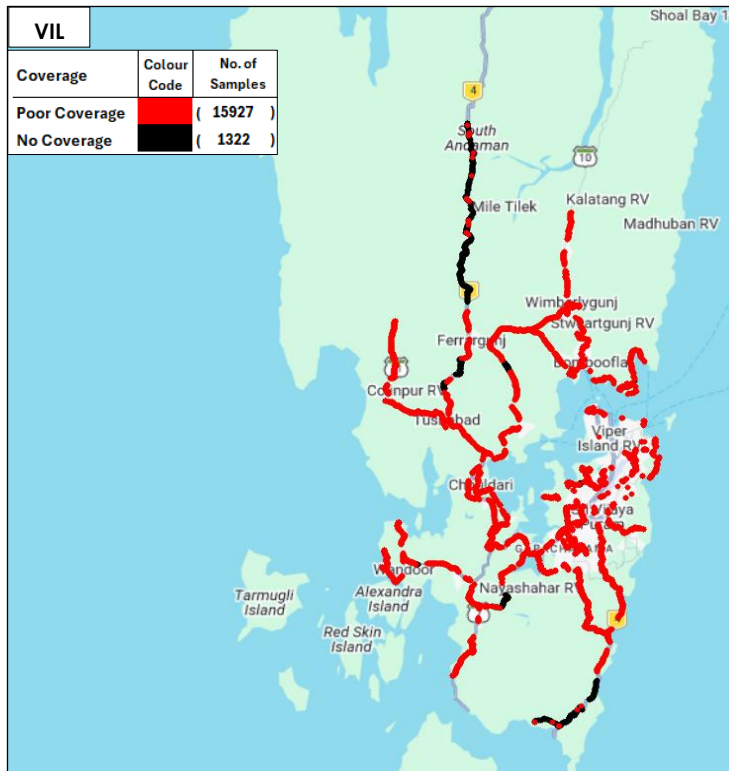


Figure-32: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice-VIL.

4.2.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	67.06	7.18	77.61	26.54
	80 th Percentile	113.73	11.05	156.85	38.95
	20 th Percentile	17.69	2.49	5.96	4.45
Upload Throughput (Mbits/s)	Average	18.01	6.13	20.28	10.84
	80 th Percentile	33.29	10.58	32.20	21.03
	20 th Percentile	3.62	1.65	2.57	0.07
Latency (ms)	50 th Percentile	88.80	46.24	43.75	62.87

Table-19: Summary of Data performance in network auto-selection mode.

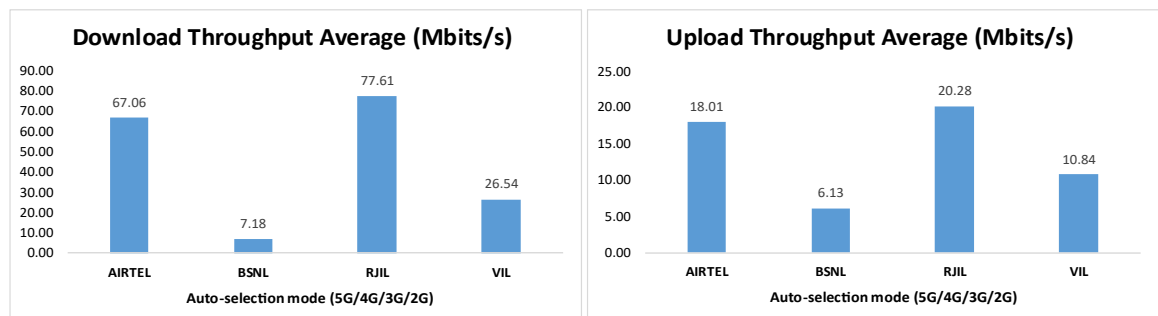


Figure- 33: Download & Upload throughput.

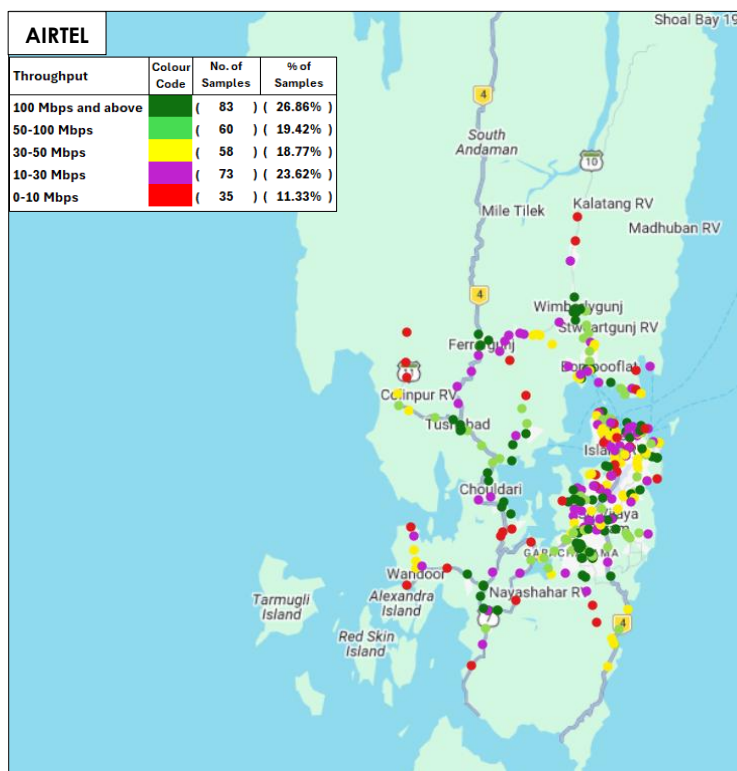


Figure-34: Download throughput distribution auto-selection mode (5G/4G/3G/2G) – AIRTEL.

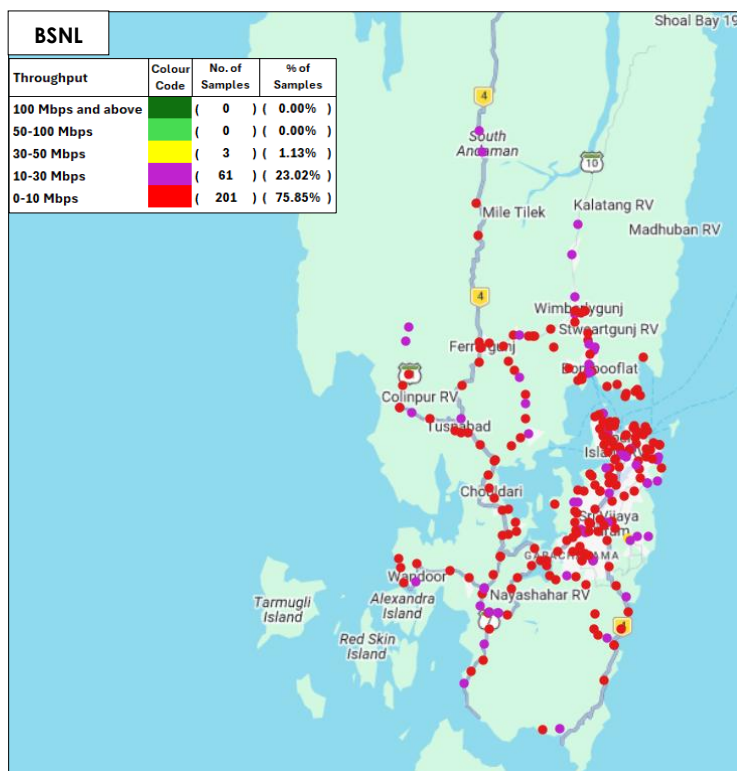


Figure-35: Download throughput distribution auto-selection mode (5G/4G/3G/2G) – BSNL.

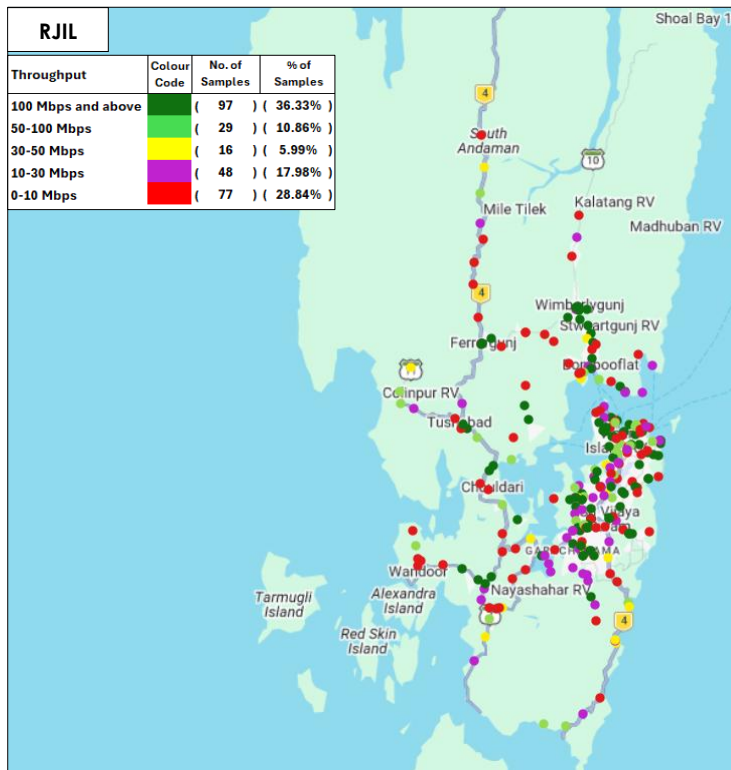


Figure-36: Download throughput distribution auto-selection mode (5G/4G/3G/2G) – RJIL.

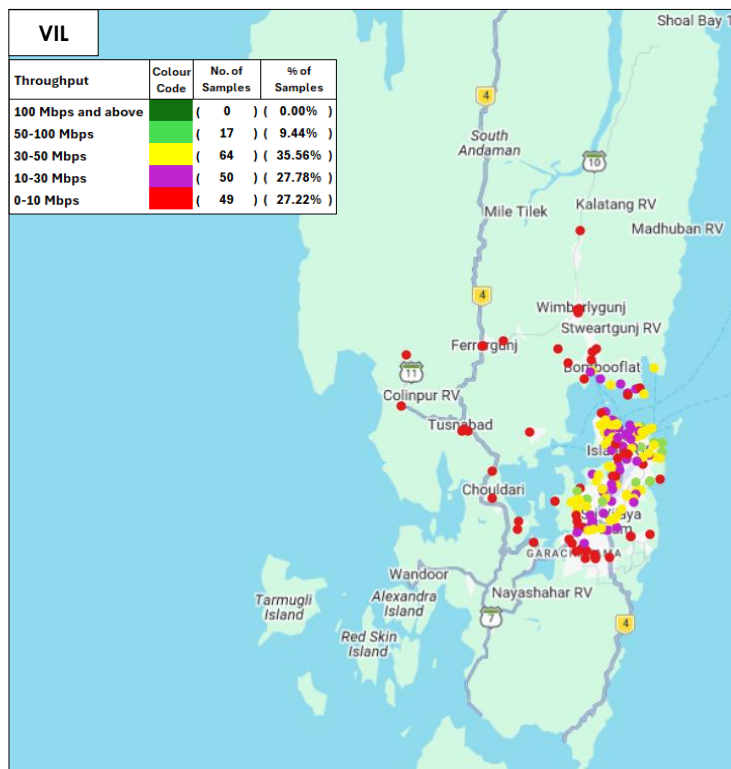


Figure-37: Download throughput distribution auto-selection mode (5G/4G/3G/2G) – VIL.

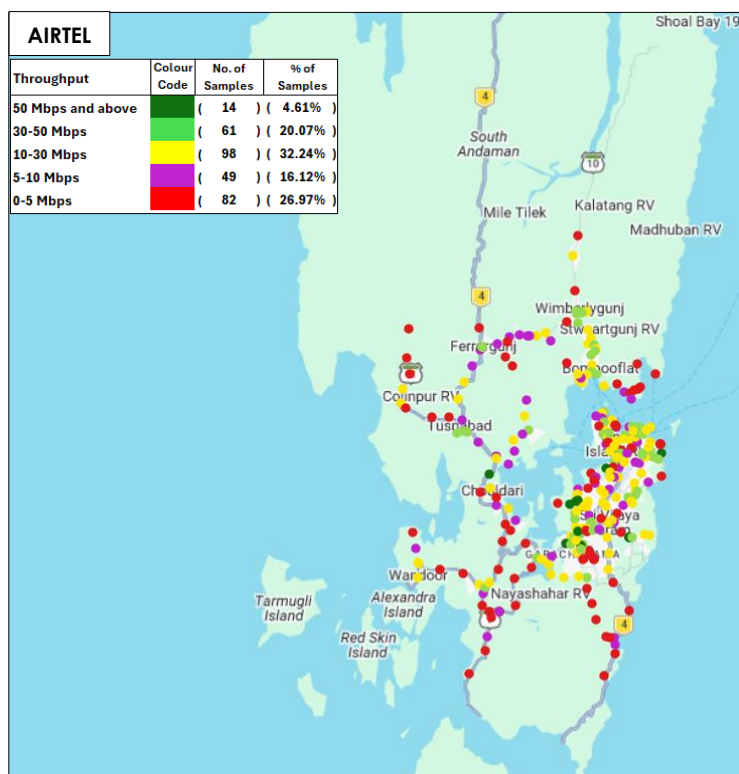


Figure-38: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) – AIRTEL.

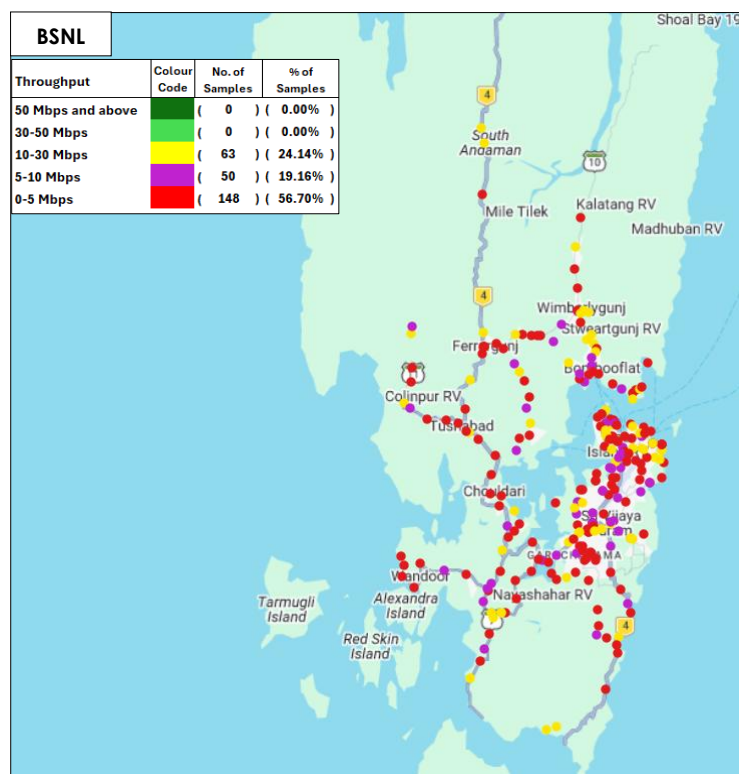


Figure-39: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) – BSNL.

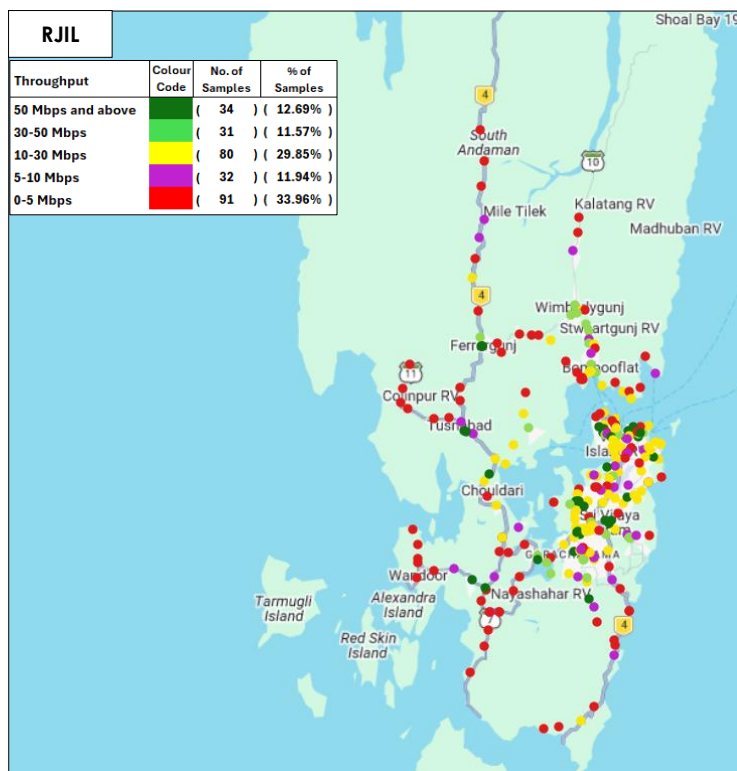


Figure-40: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) – RJIL.

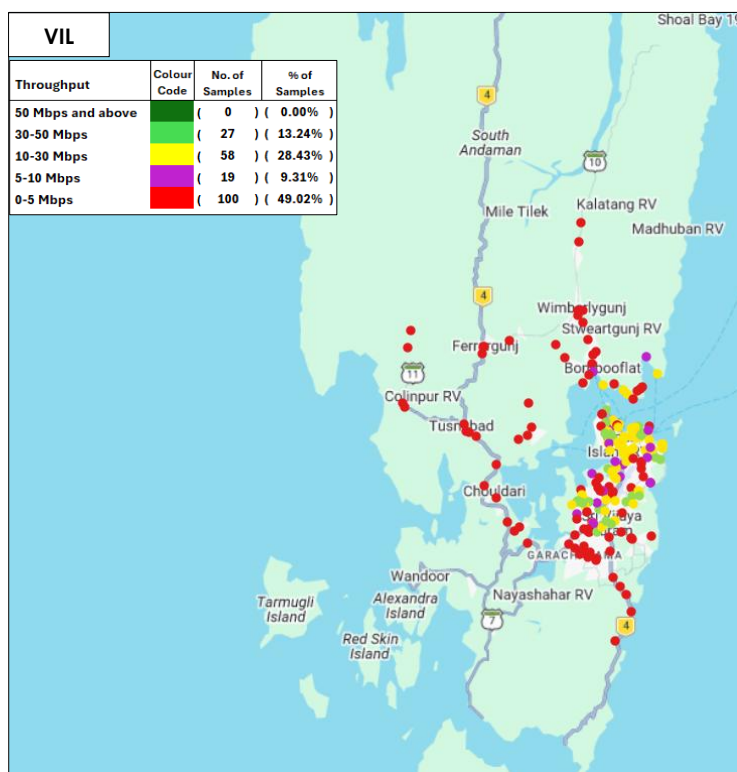


Figure-41: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) – VIL.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	56.17%	NA	70.22%	NA
4G	40.42%	95.26%	28.82%	50.84%
3G	NA	0.00%	NA	NA
2G	1.02%	2.21%	NA	45.86%
Limited Service	2.39%	2.53%	0.96%	3.29%

Table-20: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

Note-

- NA- Service provider doesn't provide services in respective technology.

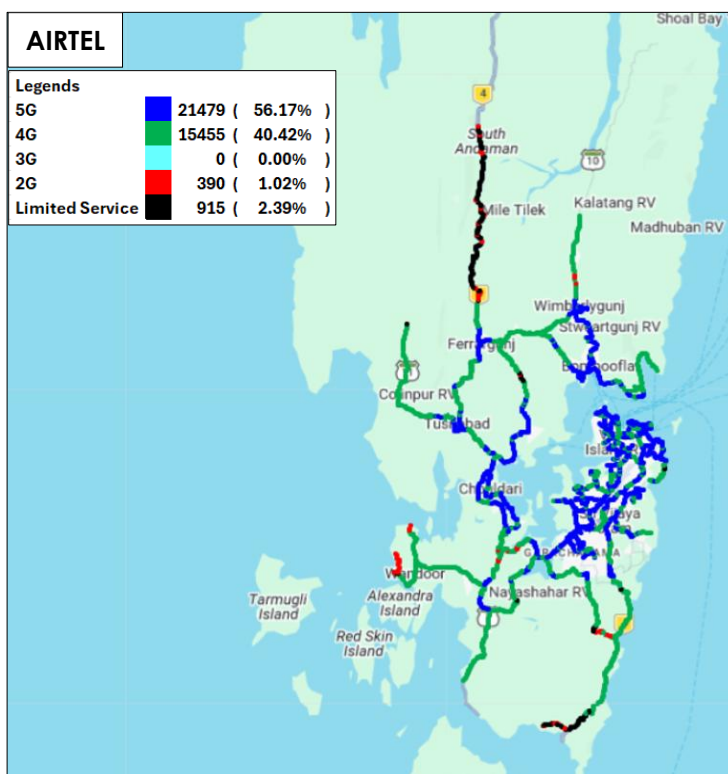


Figure-42: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data – AIRTEL.

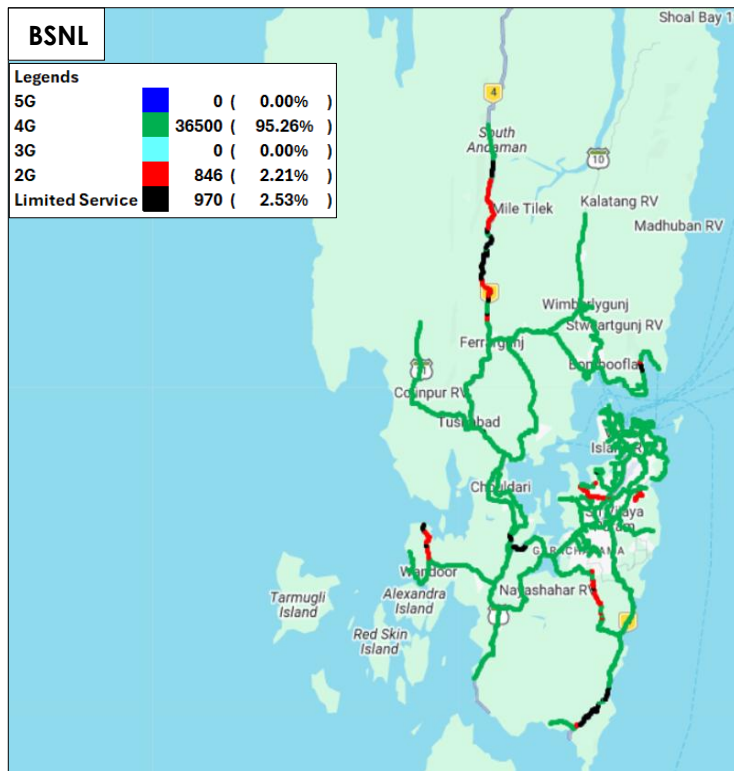


Figure-43: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data – BSNL.

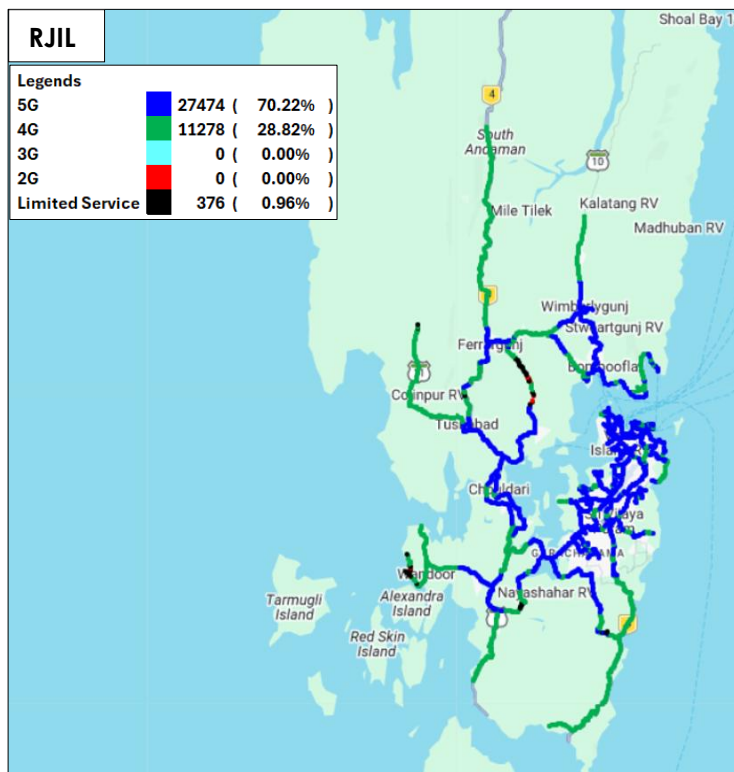


Figure-44: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data – RJIL.

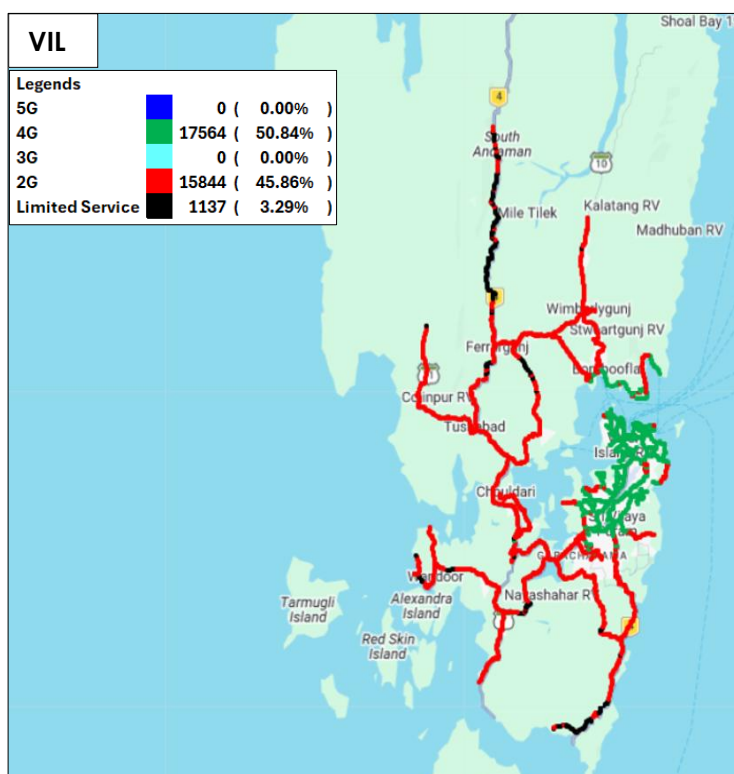


Figure-45: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data – VIL.

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-91, 92, 93 & 94 for map view)

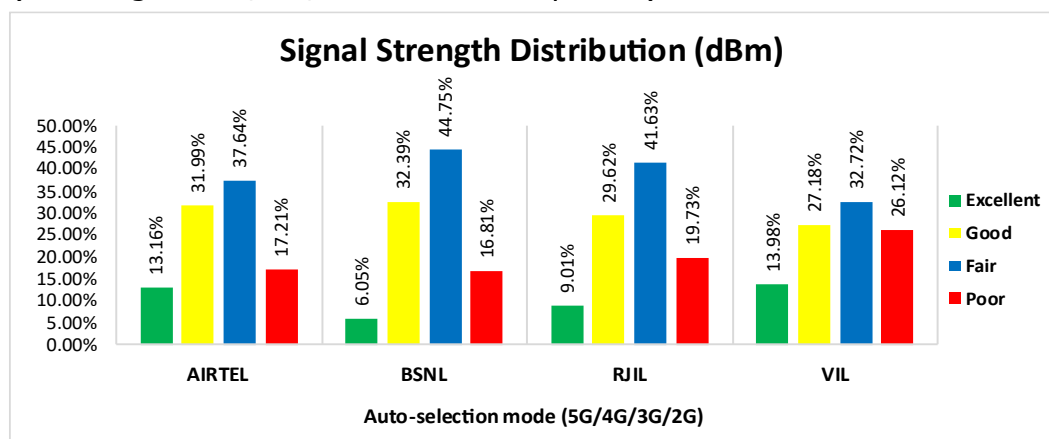


Figure-46: Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

Observations:

- Airtel has 13% of samples falling in the excellent signal strength category.
- BSNL has 6% of samples falling in the excellent signal strength category.
- RJIL has 9% of samples falling in the excellent signal strength category.
- VIL has 14% of samples falling in the excellent signal strength category.

4.3 Hotspots

Hotspot testing has been done from 17th August 2026 to 21st August 2026. Ten locations have been tested in South Andaman District. (Refer Table-1)

4.3.1 Locations

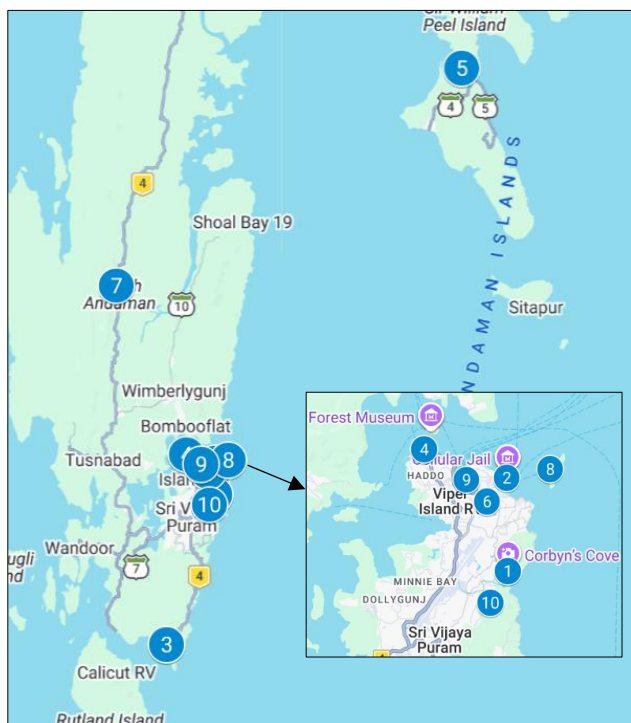


Figure- 47: Hotspot locations.

4.3.2 Hotspot covered

1. Carvins Cove Beach
2. Cellular Jail
3. Chidiyatapu Sunset Point - Sri Vijaya Puram
4. Haddo Jetty - Chatham Jetty Haddo - Sri Vijaya Puram
5. Havelock Jetty
6. Head Post Office Port Blair - Aberdeen Bazar Shadipur - Sri Vijaya Puram
7. Jirkatang Check Post
8. NSCB Island Jetty - Ross Island Rd
9. Phoenix Bay Jetty - Sri Vijaya Puram
10. Pondicherry University Port Blair Campus - Chakargaon Junglighat - Sri Vijaya Puram

4.3.3 Voice performance

Overall Voice Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	100	100	100	100
Call Setup Success Rate %	80.00	95.00	100.00	74.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	2.11	7.50	0.79	1.44

Table-21: Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Carvins Cove Beach				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	2.01	7.70	0.61	0.98

Table-22: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Cellular Jail				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	70.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	2.36	8.22	0.65	0.99

Table-23: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Chidiyatapu Sunset Point - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	0.00	100.00	100.00	0.00
Drop Call Rate %	-	0.00	0.00	-
Call Setup Time-Average (Second)	-	7.47	0.68	-

Table-24: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Note- "-Call setup time & drop call rate have not been reported as all calls were failed at this location.

Haddo Jetty - Chatham Jetty Haddo - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	2.55	7.71	0.88	1.33

Table-25: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Havelock Jetty				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	40.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	2.02	7.60	0.78	9.07

Table-26: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Head Post Office Port Blair - Aberdeen Bazar Shadipur - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	90.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.89	7.41	0.66	0.91

Table-27: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Jirkatang Check Post				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	0.00	100.00	100.00	0.00
Drop Call Rate %	-	0.00	0.00	-
Call Setup Time-Average (Second)	-	7.41	0.68	-

Table-28: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Note--"Call setup time & drop call rate have not been reported as all calls were failed at this location.

NSCB Island Jetty - Ross Island Rd				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	2.06	4.68	0.95	1.00

Table-29: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Phoenix Bay Jetty - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.97	8.17	1.01	0.93

Table-30: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Pondicherry University Port Blair Campus - Chakargaon Junglighat - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	90.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	2.03	8.99	0.99	0.91

Table-31: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	48.79	8.83	47.15	39.10
Download Throughput 80 th Percentile (Mbit/s)	74.96	11.32	74.21	49.41
Download Throughput 20 th Percentile (Mbit/s)	16.19	3.12	5.16	27.01
Download Session Setup Success Rate %	80.00	94.00	100.00	64.00
Upload Throughput Average (Mbits/s)	11.06	6.48	9.97	11.06
Upload Throughput 80 th Percentile (Mbit/s)	19.95	9.69	17.39	18.22
Upload Throughput 20 th Percentile (Mbit/s)	2.20	2.29	1.50	2.51
Upload Session Setup Success Rate %	80.00	98.00	100.00	68.00
Web Browsing Delay (Second)	6.42	3.46	3.91	2.79
Youtube Initial Buffer Delay (Second)	5.99	2.33	1.70	1.70
Latency (ms) – 50 th Percentile	92.56	48.42	49.04	63.15
Jitter (ms)	22.33	6.82	12.86	92.35
Packet Loss Rate%	67.34	23.47	15.09	41.09
Packet Loss Rate- 90 th percentile	100.00	76.24	57.94	100.00

Table-32: Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Carvins Cove Beach				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	40.75	29.37	91.48	40.09
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	9.95	8.99	13.32	12.93
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	7.02	5.91	3.30	3.17
Youtube Initial Buffer Delay (Second)	1.44	0.72	0.43	1.55
Latency (ms) – 50 th Percentile	99.57	54.84	40.70	61.45
Jitter (ms)	20.11	4.38	17.96	23.17
Packet Loss Rate%	51.50	0.20	2.20	2.60

Table-33: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Cellular Jail				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	101.96	2.78	12.91	54.11
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	6.48	2.41	9.39	10.98
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	7.61	3.73	3.08	3.85
Youtube Initial Buffer Delay (Second)	7.16	3.09	0.67	1.47
Latency (ms) – 50 th Percentile	114.29	51.09	43.38	62.52
Jitter (ms)	21.25	19.60	9.52	12.59
Packet Loss Rate%	84.00	3.30	1.60	0.10

Table-34: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Chidiyatapu Sunset Point - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	-	11.80	56.39	-
Download Session Setup Success Rate %	0.00	100.00	100.00	0.00
Upload Throughput Average (Mbits/s)	-	10.68	5.15	-
Upload Session Setup Success Rate %	0.00	100.00	100.00	0.00
Web Browsing Delay (Second)	-	4.53	3.16	-
Youtube Initial Buffer Delay (Second)	-	1.05	0.85	-
Latency (ms) – 50 th Percentile	-	40.90	43.18	-
Jitter (ms)	-	2.27	6.21	-
Packet Loss Rate%	100.00	28.70	28.50	100.00

Table-35: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- “-” Respective tests were failed.

Haddo Jetty - Chatham Jetty Haddo - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	102.27	7.65	3.73	4.07
Download Session Setup Success Rate %	100.00	100.00	100.00	40.00
Upload Throughput Average (Mbits/s)	14.83	2.22	1.70	1.53
Upload Session Setup Success Rate %	100.00	100.00	100.00	40.00
Web Browsing Delay (Second)	5.95	1.59	8.14	0.00
Youtube Initial Buffer Delay (Second)	12.19	2.07	6.75	-
Latency (ms) – 50 th Percentile	79.93	49.03	62.53	123.69
Jitter (ms)	7.07	9.57	36.72	556.18
Packet Loss Rate%	37.00	34.70	47.60	88.00

Table-36: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- “-” Youtube tests were failed.

Havelock Jetty				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	9.73	4.88	32.95	-
Download Session Setup Success Rate%	100.00	100.00	100.00	0.00
Upload Throughput Average (Mbits/s)	1.40	3.93	5.50	0.07
Upload Session Setup Success Rate %	100.00	100.00	100.00	40.00
Web Browsing Delay (Second)	5.78	2.71	1.56	-
Youtube Initial Buffer Delay (Second)	-	1.78	0.75	-
Latency (ms)- 50 th Percentile	96.83	76.39	41.48	-
Jitter (ms)	28.87	9.03	7.30	-
Packet Loss Rate%	96.70	5.40	3.00	100.00

Table-37: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- “-” Respective tests were failed.

Head Post Office Port Blair - Aberdeen Bazar Shadipur - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	48.99	2.85	153.84	55.79
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	24.13	5.28	33.21	20.61
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	7.21	2.09	2.67	1.57
Youtube Initial Buffer Delay (Second)	6.84	5.80	0.42	1.18
Latency (ms) – 50 th Percentile	88.04	41.51	48.75	57.50
Jitter (ms)	21.51	4.14	3.85	3.77
Packet Loss Rate%	47.50	1.30	0.10	0.30

Table-38: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Jirkatang Check Post				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	-	7.76	10.99	-
Download Session Setup Success Rate%	0.00	100.00	100.00	0.00
Upload Throughput Average (Mbits/s)	-	12.56	3.03	-
Upload Session Setup Success Rate %	0.00	100.00	100.00	0.00
Web Browsing Delay (Second)	-	2.11	4.01	-
Youtube Initial Buffer Delay (Second)	-	0.95	1.30	-
Latency (ms)- 50 th Percentile	-	41.93	75.46	-
Jitter (ms)	-	4.32	6.15	-
Packet Loss Rate%	100.00	8.00	6.80	100.00

Table-39: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Respective tests were failed.

NSCB Island Jetty - Ross Island Rd				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	22.73	5.08	13.00	32.28
Download Session Setup Success Rate %	100.00	60.00	100.00	100.00
Upload Throughput Average (Mbits/s)	2.97	0.98	1.63	4.52
Upload Session Setup Success Rate %	100.00	80.00	100.00	100.00
Web Browsing Delay (Second)	3.62	5.74	3.13	2.65
Youtube Initial Buffer Delay (Second)	2.32	9.63	1.86	3.41
Latency (ms) – 50 th Percentile	95.62	-	58.89	63.78
Jitter (ms)	67.62	-	20.22	6.62
Packet Loss Rate%	53.90	100.00	3.60	1.60

Table-40: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Ping tests were failed.

Phoenix Bay Jetty - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	42.47	4.78	87.52	36.65
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	26.61	10.89	25.53	20.45
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	6.30	2.24	3.08	2.70
Youtube Initial Buffer Delay (Second)	-	2.91	0.54	1.20
Latency (ms) – 50 th Percentile	62.47	40.45	35.06	58.05
Jitter (ms)	2.81	2.41	13.83	20.25
Packet Loss Rate%	43.90	45.40	41.90	5.50

Table-41: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube tests were failed.

Pondicherry University Port Blair Campus - Chakargaon Junglighat - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	21.43	10.08	8.69	29.72
Download Session Setup Success Rate %	100.00	80.00	100.00	100.00
Upload Throughput Average (Mbits/s)	2.13	5.76	1.22	5.11
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	8.20	4.84	9.20	2.67
Youtube Initial Buffer Delay (Second)	-	0.89	4.52	1.41
Latency (ms) – 50 th Percentile	89.97	53.70	62.22	67.09
Jitter (ms)	6.11	4.84	7.17	28.54
Packet Loss Rate%	58.90	7.70	15.60	12.80

Table-42: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube tests were failed.

4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)

Overall Data Performance					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	52.23	-	58.84	-
	Upload Throughput Average (Mbits/s)	10.89	-	11.31	-
4G	Download Throughput Average (Mbits/s)	25.54	9.42	33.20	28.21
	Upload Throughput Average (Mbits/s)	4.23	6.37	5.02	10.65

Table-43: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Carvins Cove Beach					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	177.60	-
	Upload Throughput Average (Mbits/s)	-	-	10.06	-
4G	Download Throughput Average (Mbits/s)	42.48	29.75	40.63	26.69
	Upload Throughput Average (Mbits/s)	7.41	10.16	5.24	13.76

Table-44: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Cellular Jail					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	78.38	-	20.22	-
	Upload Throughput Average (Mbits/s)	7.55	-	11.50	-
4G	Download Throughput Average (Mbits/s)	39.18	3.08	30.11	41.59
	Upload Throughput Average (Mbits/s)	5.13	3.29	1.98	11.21

Table-45: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Chidiyatapu Sunset Point - Sri Vijaya Puram					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	-	-
	Upload Throughput Average (Mbits/s)	-	-	-	-
4G	Download Throughput Average (Mbits/s)	-	9.87	78.05	-
	Upload Throughput Average (Mbits/s)	-	14.41	12.57	-

Table-46: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Haddo Jetty - Chatham Jetty Haddo - Sri Vijaya Puram					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	100.21	-	4.52	-
	Upload Throughput Average (Mbits/s)	18.61	-	1.73	-
4G	Download Throughput Average (Mbits/s)	19.98	2.66	3.72	13.32
	Upload Throughput Average (Mbits/s)	3.55	1.54	1.09	1.25

Table-47: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Havelock Jetty					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	32.17	-
	Upload Throughput Average (Mbits/s)	-	-	5.82	-
4G	Download Throughput Average (Mbits/s)	16.86	5.82	15.30	-
	Upload Throughput Average (Mbits/s)	1.82	3.46	0.59	-

Table-48: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Head Post Office Port Blair - Aberdeen Bazar Shadipur - Sri Vijaya Puram					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	18.37	-	49.78	-
	Upload Throughput Average (Mbits/s)	16.56	-	24.94	-
4G	Download Throughput Average (Mbits/s)	13.41	3.78	38.71	31.60
	Upload Throughput Average (Mbits/s)	3.45	3.26	15.31	19.18

Table-49: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Jirkatang Check Post					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	-	-
	Upload Throughput Average (Mbits/s)	-	-	-	-
4G	Download Throughput Average (Mbits/s)	-	25.61	57.46	-
	Upload Throughput Average (Mbits/s)	-	14.28	3.40	-

Table-50: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

NSCB Island Jetty - Ross Island Rd					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	18.91	-	11.05	-
	Upload Throughput Average (Mbits/s)	2.75	-	10.62	-
4G	Download Throughput Average (Mbits/s)	14.98	3.47	17.04	23.26
	Upload Throughput Average (Mbits/s)	1.73	0.45	2.53	1.55

Table-51: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Phoenix Bay Jetty - Sri Vijaya Puram					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	49.21	-	168.94	-
	Upload Throughput Average (Mbits/s)	15.53	-	19.86	-
4G	Download Throughput Average (Mbits/s)	49.61	4.76	44.48	24.25
	Upload Throughput Average (Mbits/s)	8.82	9.61	6.85	19.21

Table-52: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Pondicherry University Port Blair Campus - Chakargaon Junglighat - Sri Vijaya Puram					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	48.32	-	6.46	-
	Upload Throughput Average (Mbits/s)	2.73	-	5.95	-
4G	Download Throughput Average (Mbits/s)	7.80	4.30	6.53	36.73
	Upload Throughput Average (Mbits/s)	1.92	2.01	0.70	8.39

Table-53: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

4.4 Walk Test

Walk test has been conducted on 19th August 2026. Two locations have been tested in Port Blair (Sri Vijaya Puram). (Refer Table-1)

4.4.1 Walk test locations

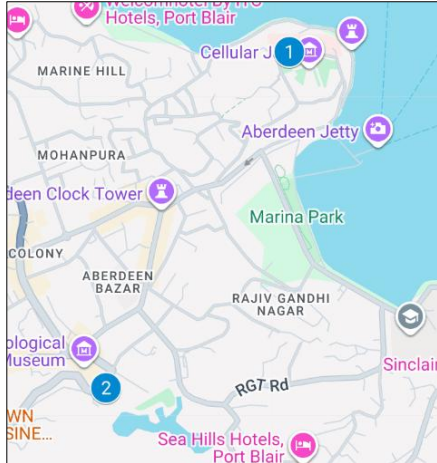


Figure-48: Walk Test locations.

4.4.2 Walk Test Covered

1. G. B. Pant Hospital - Atlanta Point - Sri Vijaya Puram
2. High Court and DC Office - Sri Vijaya Puram

4.4.3 Voice Performance

i) G. B. Pant Hospital - Atlanta Point - Sri Vijaya Puram

(a) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

G. B. Pant Hospital - Atlanta Point - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	12	12	13	12
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	7.69	0.00
Call Setup Time-Average (Second)	1.98	9.25	0.94	0.91
Handover Success Rate %	100.00	100.00	100.00	100.00

Table-54: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

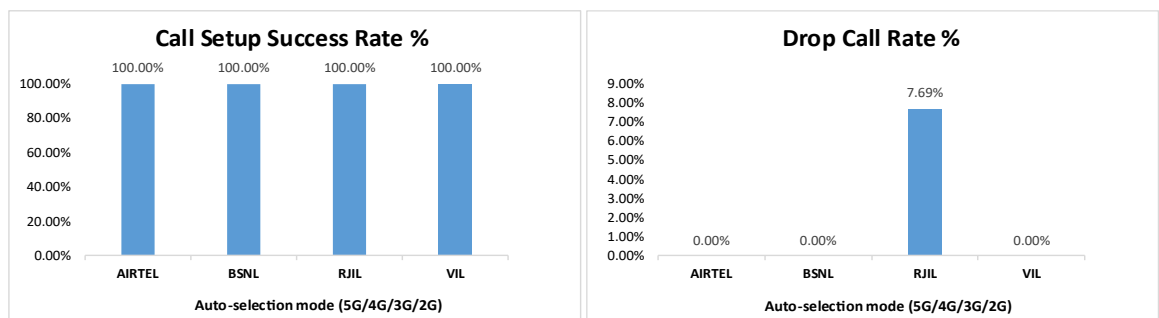


Figure- 49: Performance for call setup success rate and drop call rate.

(b) Network Technology: This section represents time spent on various network technologies.

G. B. Pant Hospital - Atlanta Point - Sri Vijaya Puram				
Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	1.50%	NA	0.00%	NA
4G	98.50%	49.24%	98.91%	100.00%
3G	NA	0.00%	NA	NA
2G	0.00%	50.48%	NA	0.00%
Limited service	0.00%	0.28%	1.09%	0.00%

Table-55: Time spent on technology during walk test.

(c) Network Signal Strength distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G).

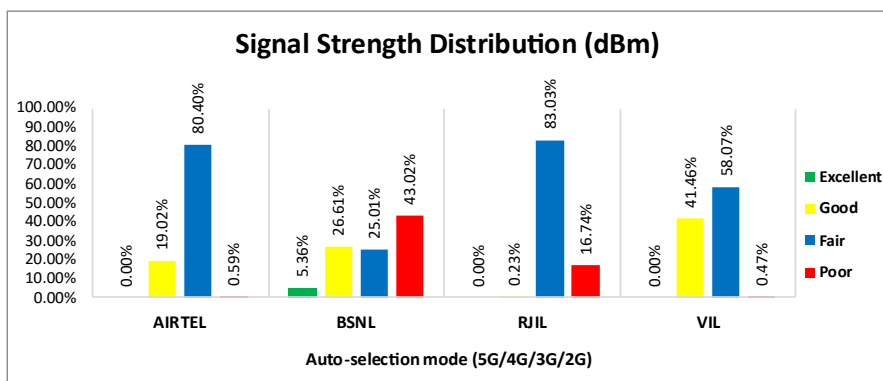


Figure-50: Signal strength distribution auto-selection mode (5G/4G/3G/2G).

ii) High Court and DC Office - Sri Vijaya Puram

(a) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

High Court and DC Office - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	12	12	12	12
Call Setup Success Rate %	100.00	91.67	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	2.03	7.69	0.67	0.98
Handover Success Rate %	100.00	100.00	100.00	100.00

Table-56: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

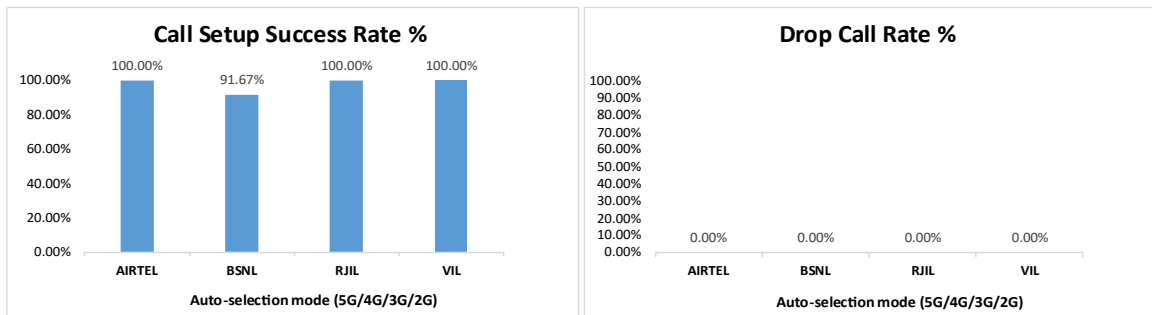


Figure- 51: Performance for call setup success rate and drop call rate.

(b) Network Technology: This section represents time spent on various network technologies.

High Court and DC Office - Sri Vijaya Puram				
Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	4.04%	NA	10.45%	NA
4G	95.96%	100.00%	89.55%	98.56%
3G	NA	0.00%	NA	NA
2G	0.00%	0.00%	NA	1.44%
Limited service	0.00%	0.00%	0.00%	0.00%

Table-57: Time spent on technology during walk test.

(c) Network Signal Strength distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G).

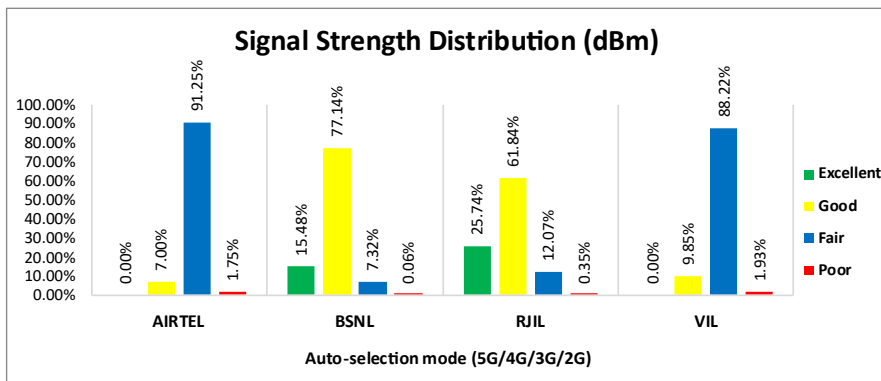


Figure-52: Signal strength distribution auto-selection mode (5G/4G/3G/2G).

4.4.4 Data Performance

i) G. B. Pant Hospital - Atlanta Point - Sri Vijaya Puram

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

G. B. Pant Hospital - Atlanta Point - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	62.48	5.47	10.71	59.27
Download Throughput 80th Percentile	93.08	6.92	21.16	97.84
Download Throughput 20th Percentile	24.00	3.79	3.67	36.54
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	10.38	4.94	1.14	26.70
Upload Throughput 80th Percentile	10.59	8.18	1.48	31.88
Upload Throughput 20th Percentile	6.32	1.60	0.80	21.67
Upload Session Setup Success Rate %	100.00	93.33	100.00	100.00
Latency (ms)-50th Percentile	90.67	49.89	61.18	59.29

Table-58: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

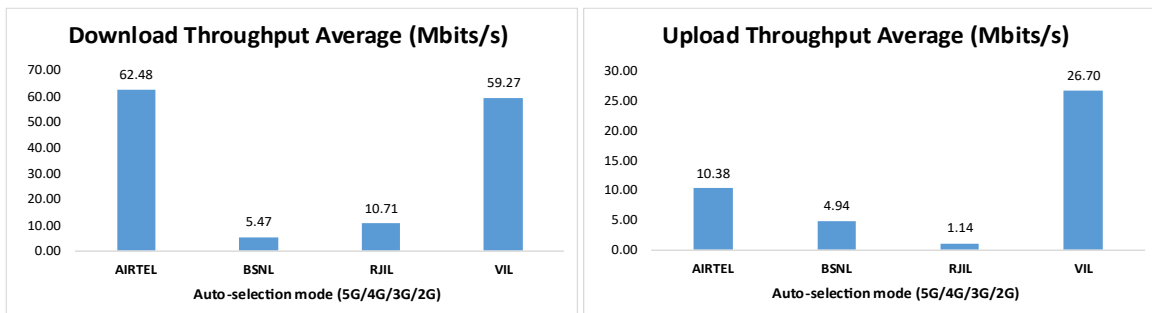


Figure- 53: Download and Upload throughput.

ii) High Court and DC Office - Sri Vijaya Puram

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

High Court and DC Office - Sri Vijaya Puram				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	31.79	13.44	31.10	32.88
Download Throughput 80th Percentile	51.54	20.45	44.52	35.49
Download Throughput 20th Percentile	6.17	5.52	1.04	31.50
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	8.40	14.67	7.52	8.12
Upload Throughput 80th Percentile	13.78	17.10	9.20	9.83
Upload Throughput 20th Percentile	3.30	13.66	2.42	3.93
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms)-50th Percentile	108.77	42.14	60.37	57.73

Table-59: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

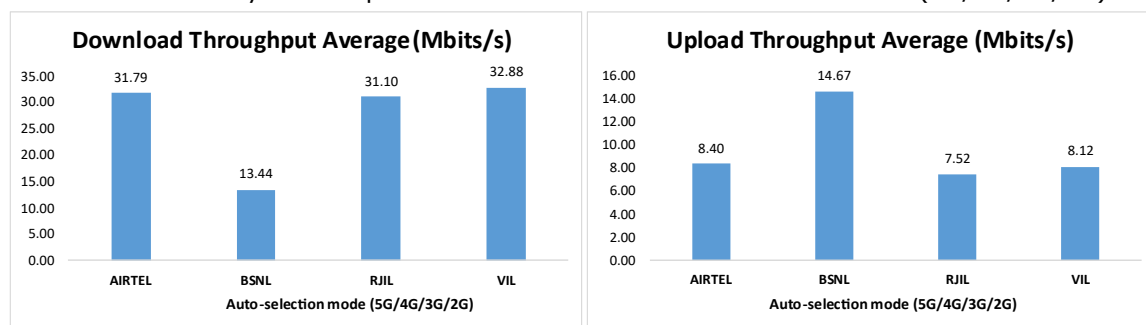


Figure- 54: Download and Upload throughput.

4.5 Coastal

Drive test has been conducted on 20th August 2026 covering one Coastal route.
(Refer Table-1)

4.5.1 Drive test route

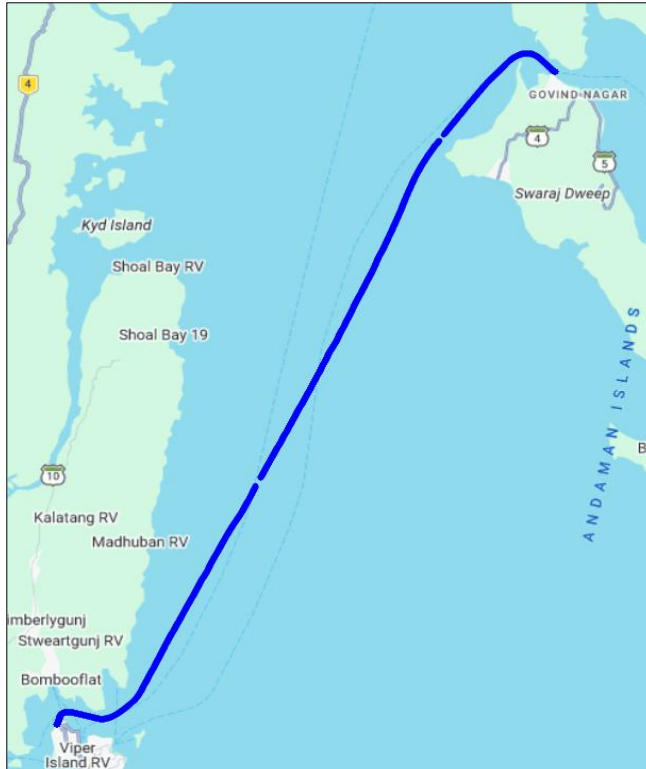


Figure-55: Drive test route Coastal.

4.5.2 Routes Covered

Port Blair (Sri Vijaya Puram) to Havelock (Swaraj Dweep)

4.5.3 Voice performance

(a) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	38	53	40	48
Call Setup Success Rate %	97.37	54.72	90.00	56.25
Drop Call Rate %	2.70	3.45	5.56	0.00
Call Setup Time Average (Second)	2.38	7.96	2.56	3.12
Handover Success Rate %	100.00	98.65	99.24	100.00

Table-60: Summary of voice call performance in network auto-selection mode.

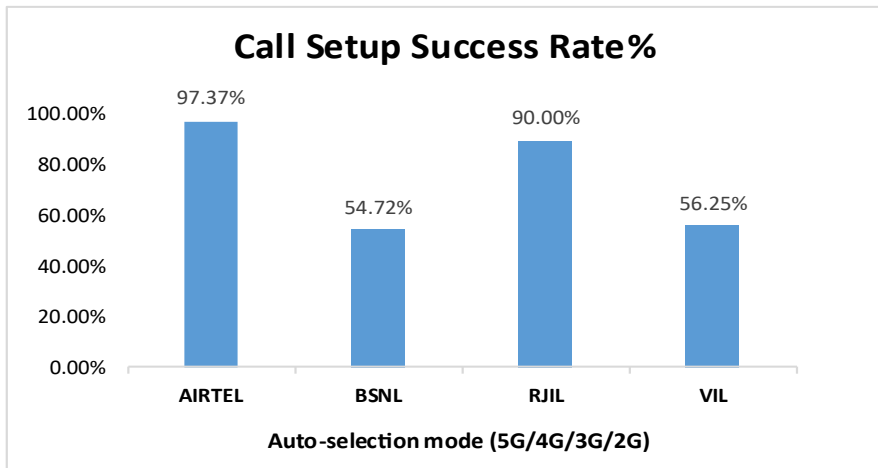


Figure-56: Performance for call setup success rate.

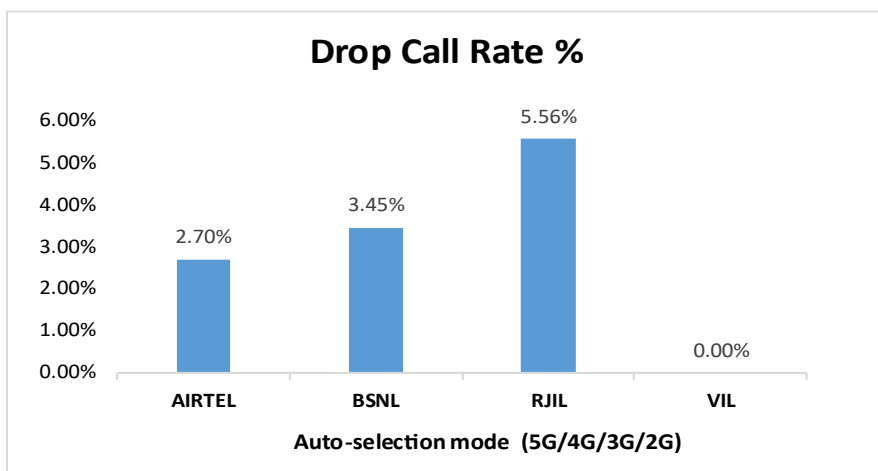


Figure-57: Performance for drop call rate.

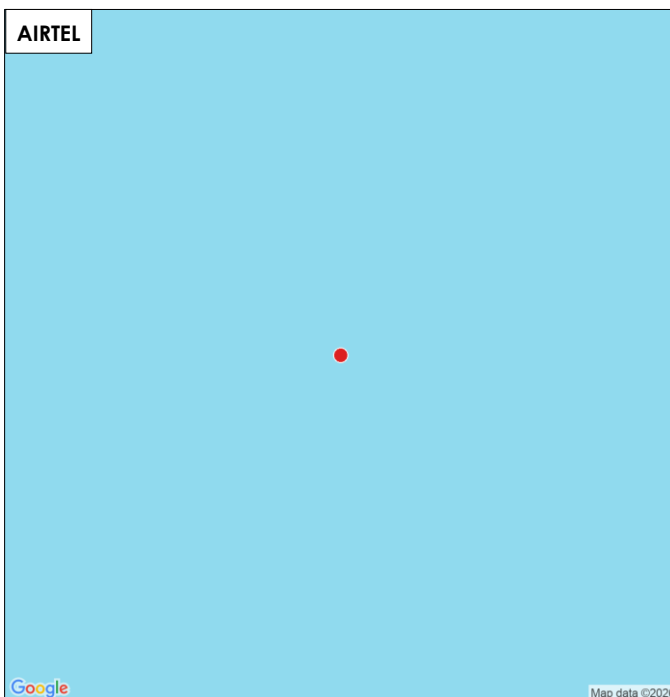


Figure-58: Drop call locations in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

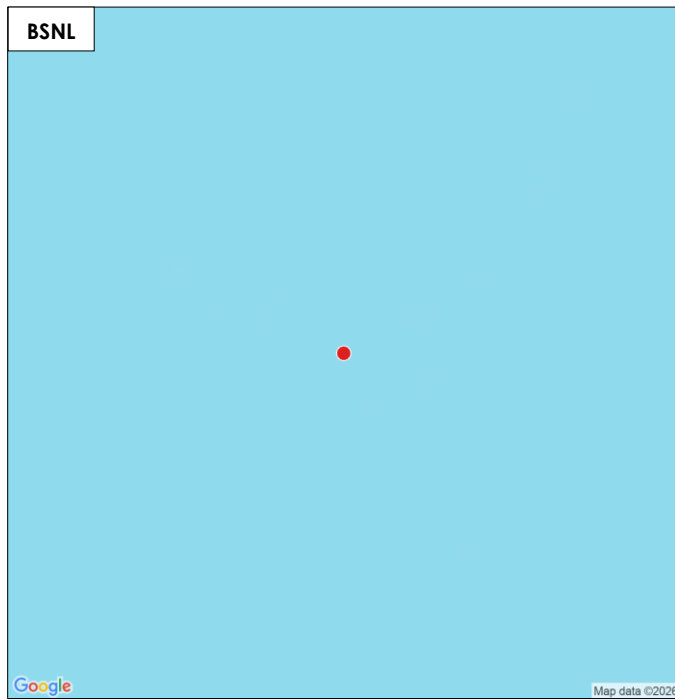


Figure-59: Drop call locations in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

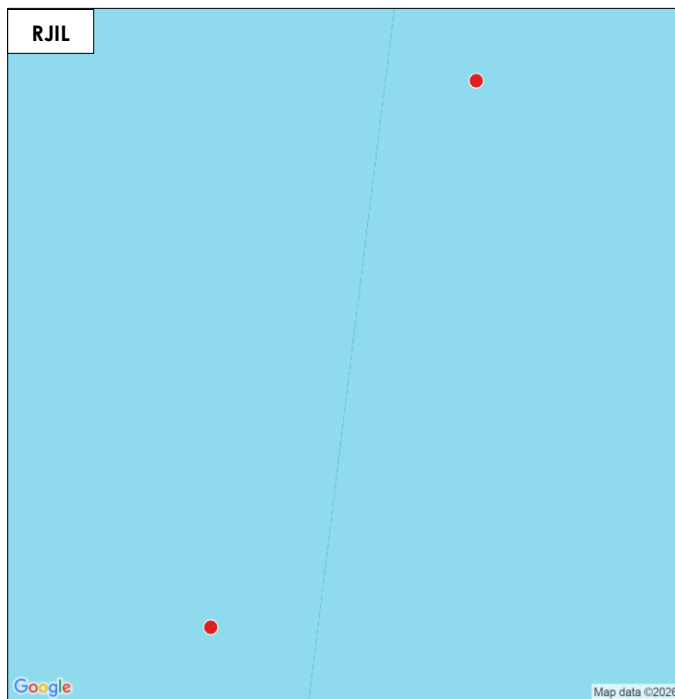


Figure-60: Drop call locations in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	1.02%	NA	24.22%	NA
4G	98.98%	89.30%	74.50%	37.59%
3G	NA	0.00%	NA	NA
2G	0.00%	8.95%	NA	54.20%
Limited Service	0.00%	1.75%	1.28%	8.21%

Table-61: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice.

Note-

- NA- Service provider doesn't provide services in respective technology.

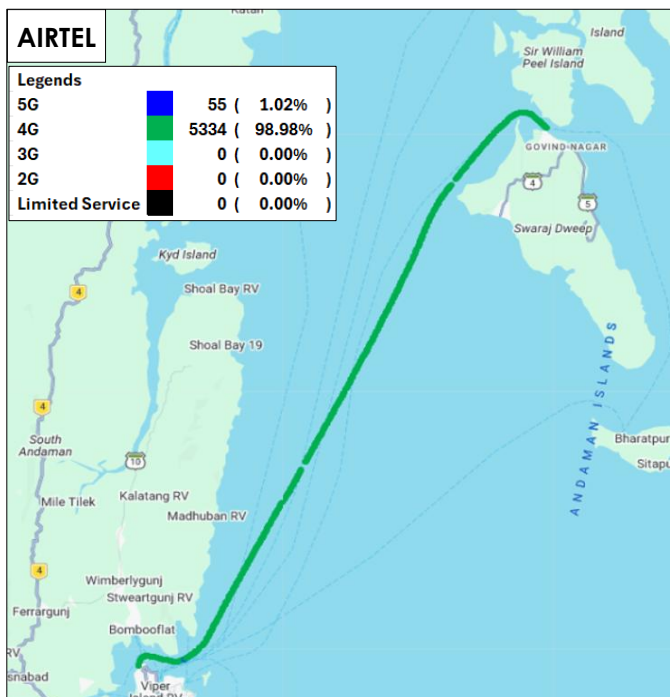


Figure-61: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

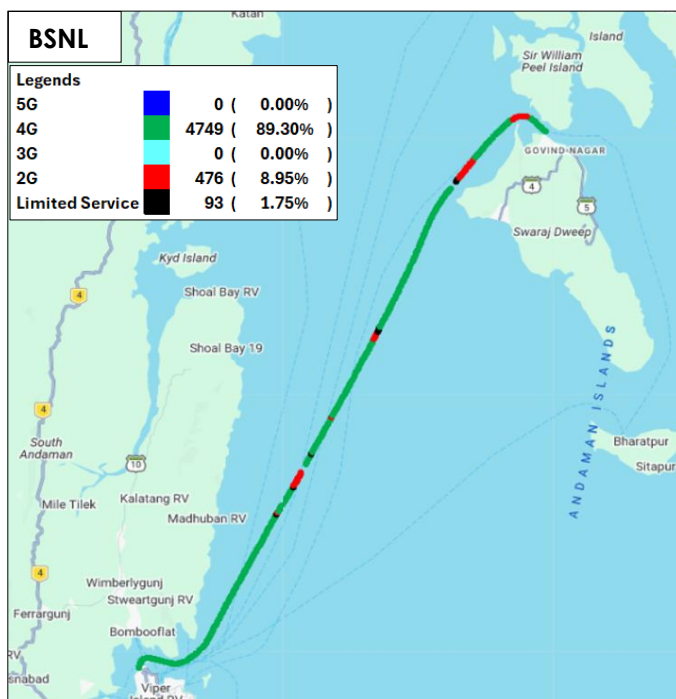


Figure-62: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

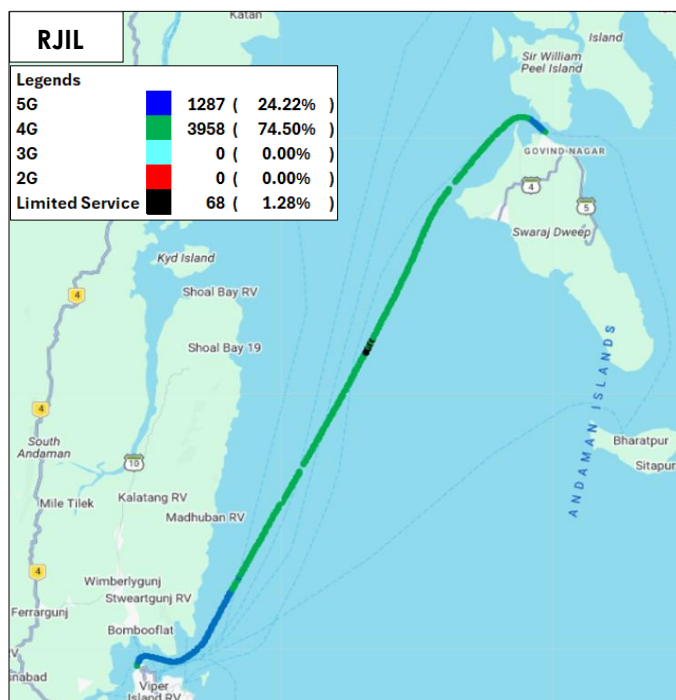


Figure-63: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

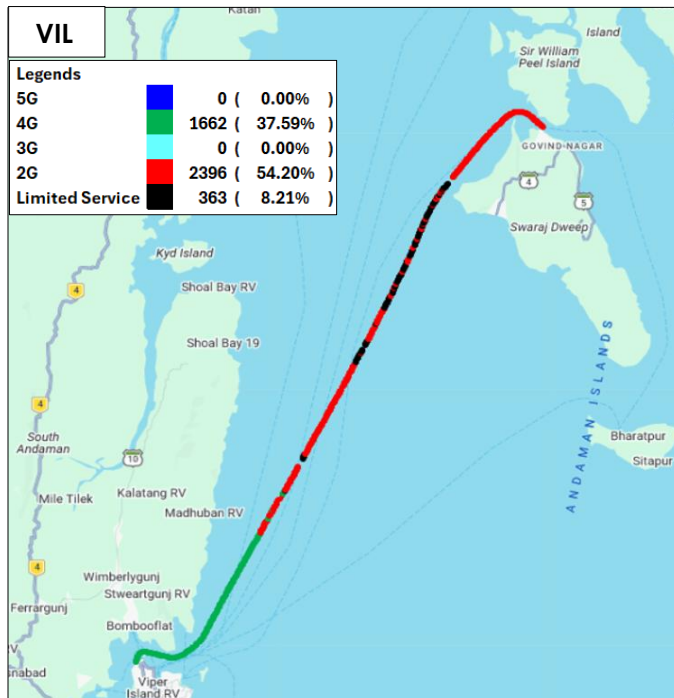


Figure-64: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - VIL.

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) voice. (Refer figure-95, 96, 97 & 98 for map view)

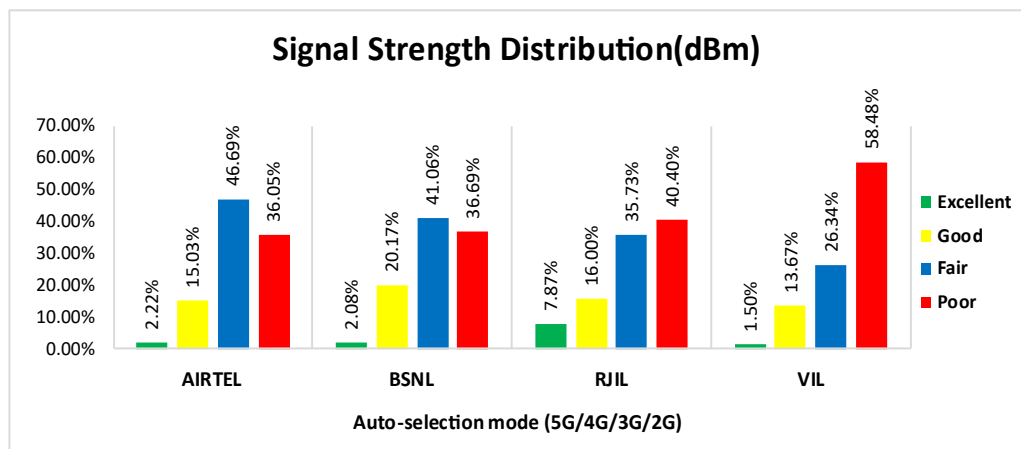


Figure-65: Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

Observations:

- Airtel has 2% of samples falling in the excellent signal strength category.
- BSNL has 2% of samples falling in the excellent signal strength category.
- RJIL has 8% of samples falling in the excellent signal strength category.
- VIL has 2% of samples falling in the excellent signal strength category.

(d) Coverage Gap observed

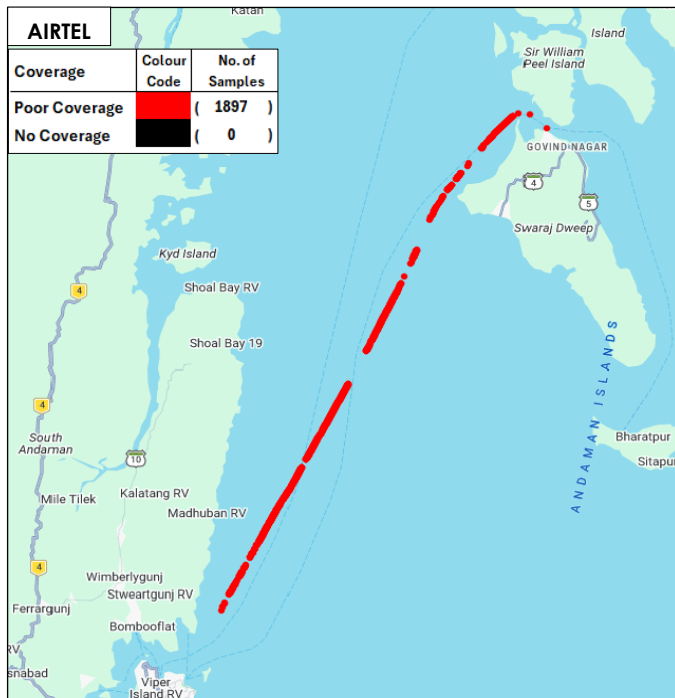


Figure-66: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice-Airtel.

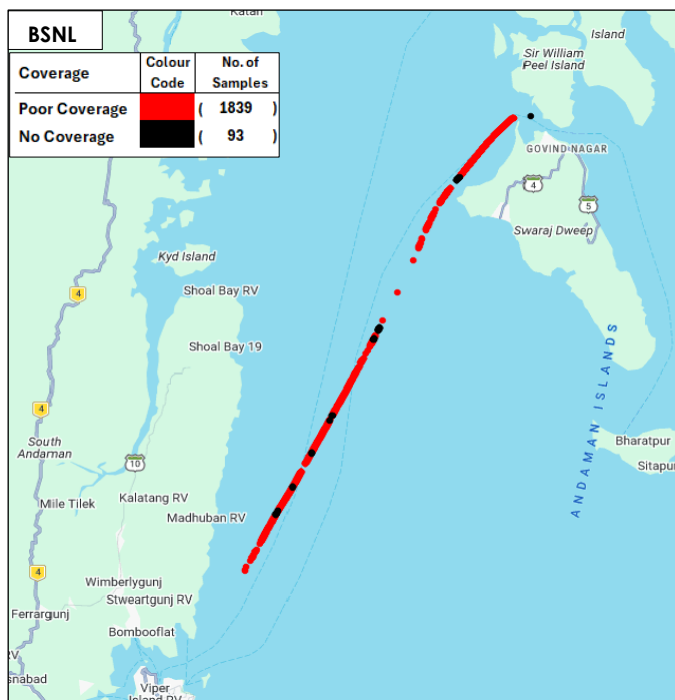


Figure-67: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice-BSNL.

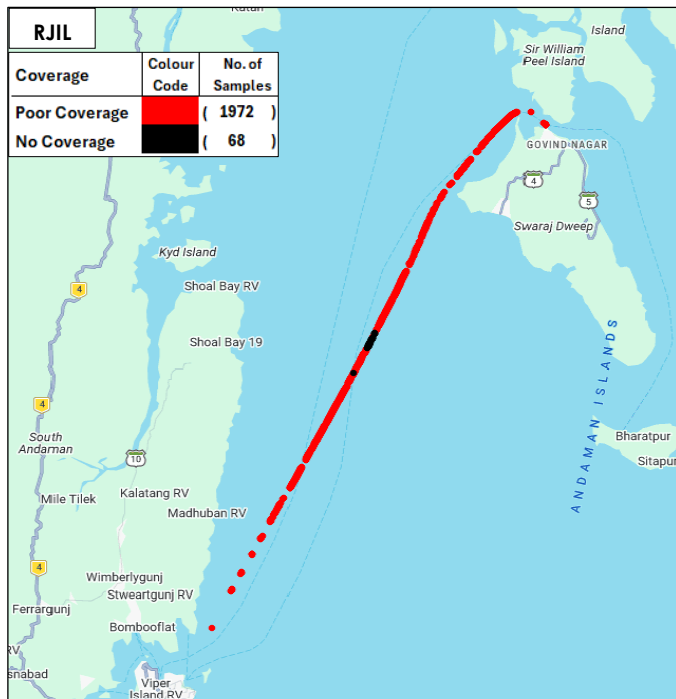


Figure-68: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice-RJIL.



Figure-69: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice-VIL.

4.5.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	17.07	4.03	34.93	28.99
	80 th Percentile	22.87	5.05	37.67	36.57
	20 th Percentile	6.31	1.65	2.81	24.12
Upload Throughput (Mbits/s)	Average	5.27	4.46	7.95	10.93
	80 th Percentile	7.36	8.17	9.96	26.68
	20 th Percentile	1.15	1.34	1.24	1.59
Latency (ms)	50 th Percentile	109.40	50.67	52.44	60.68

Table-62: Summary of Data performance in network auto-selection mode.

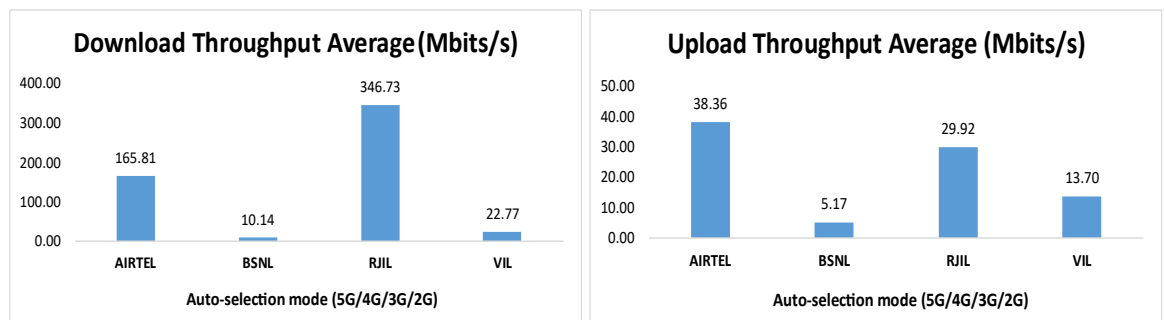


Figure-70: Download & Upload throughput.

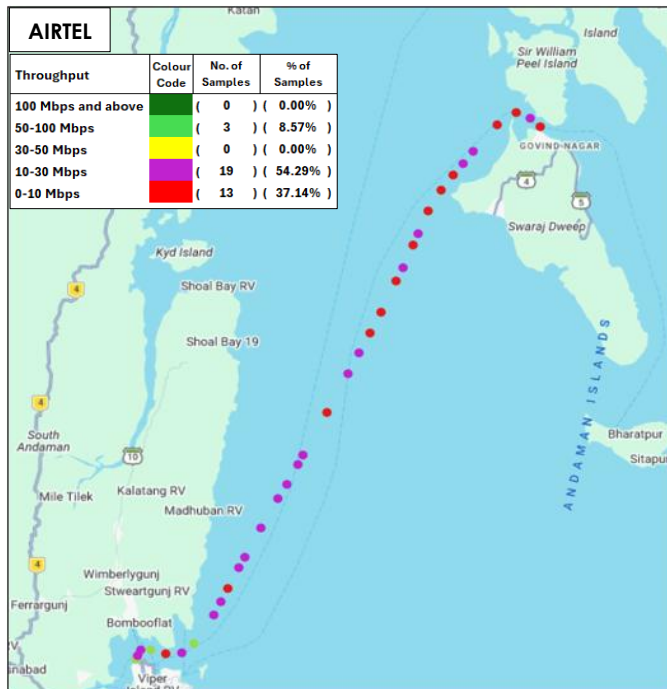


Figure-71: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - AIRTEL.

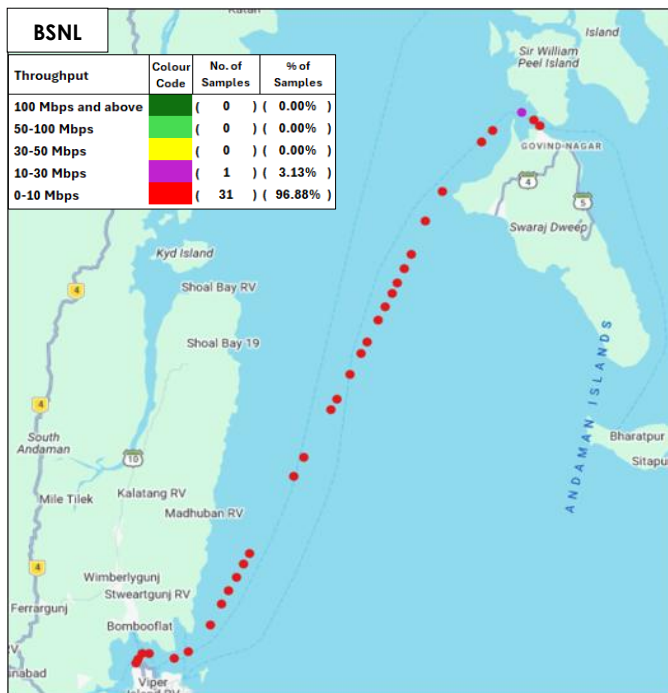


Figure-72: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - BSNL.

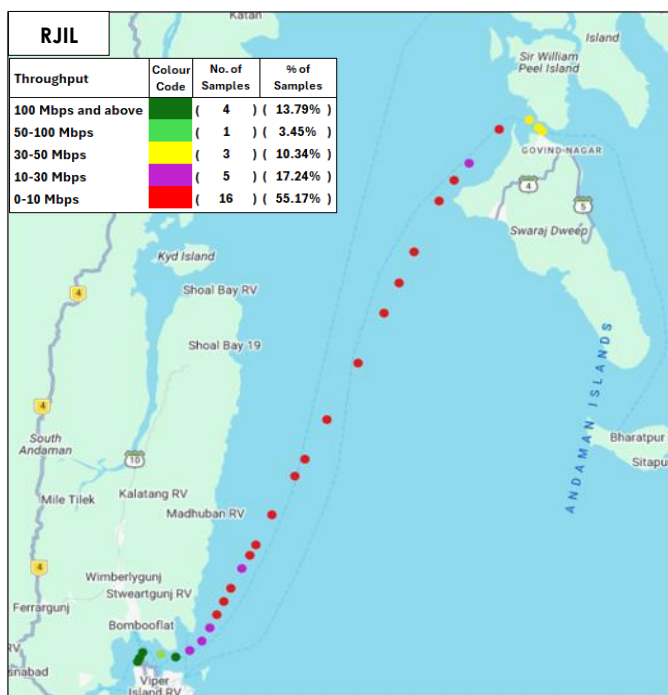


Figure-73: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - RJIL.

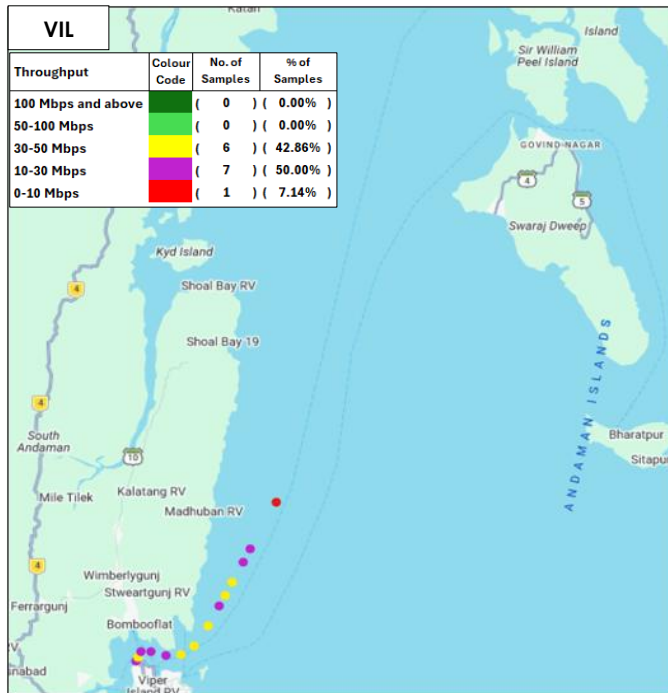


Figure-74: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - VIL.

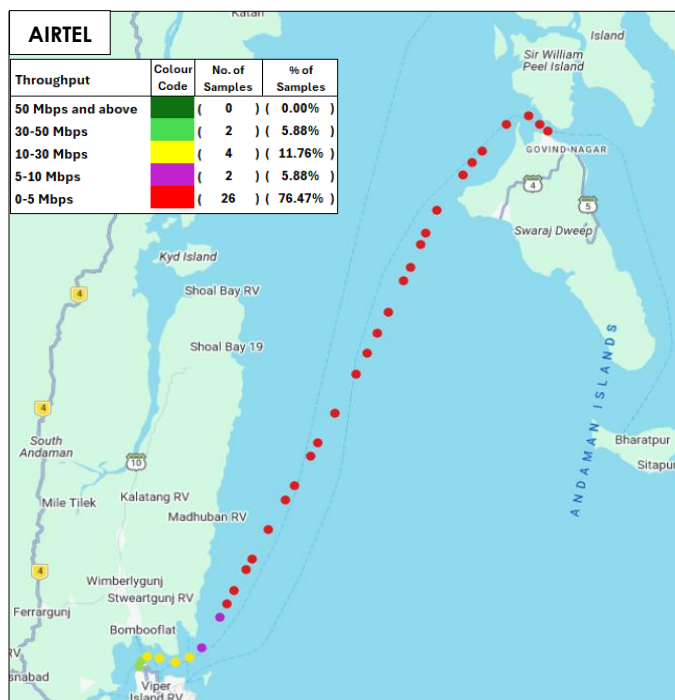


Figure-75: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) - AIRTEL.

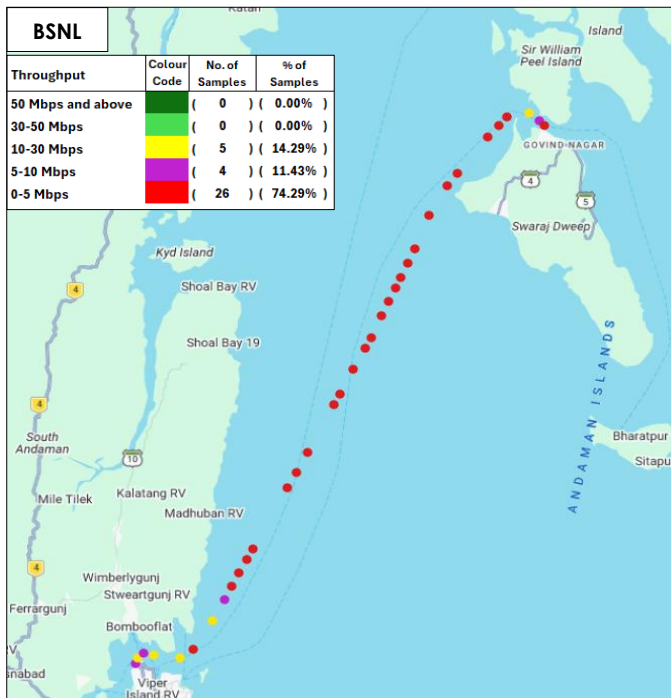


Figure-76: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) – BSNL.

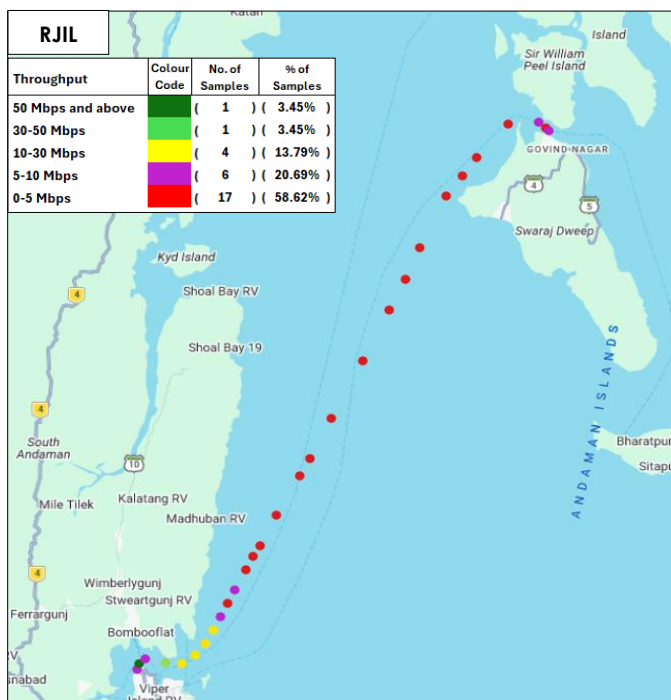


Figure-77: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) – RJIL.

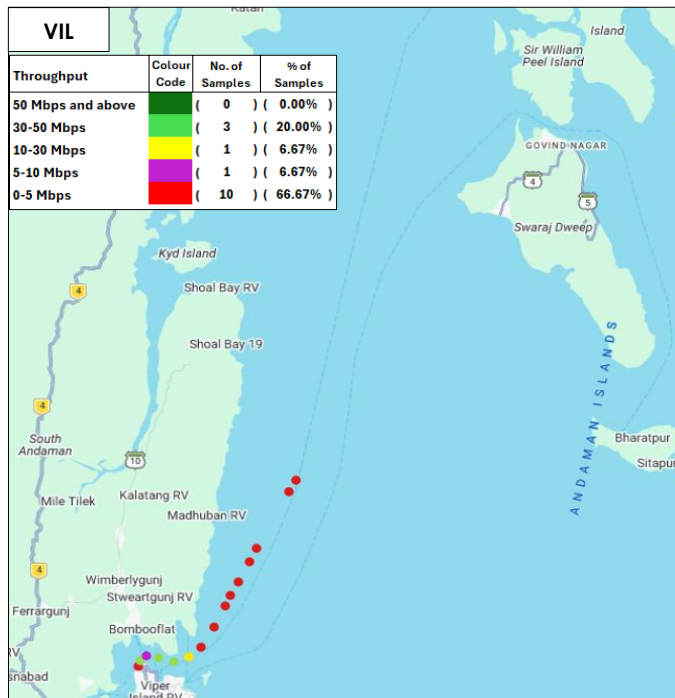


Figure-78: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) – VIL.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	12.18%	NA	29.44%	NA
4G	87.82%	94.91%	70.56%	40.61%
3G	NA	0.00%	NA	NA
2G	0.00%	4.08%	NA	54.07%
Limited Service	0.00%	1.00%	0.00%	5.32%

Table-63: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

Note-

- NA- Service provider doesn't provide services in respective technology.

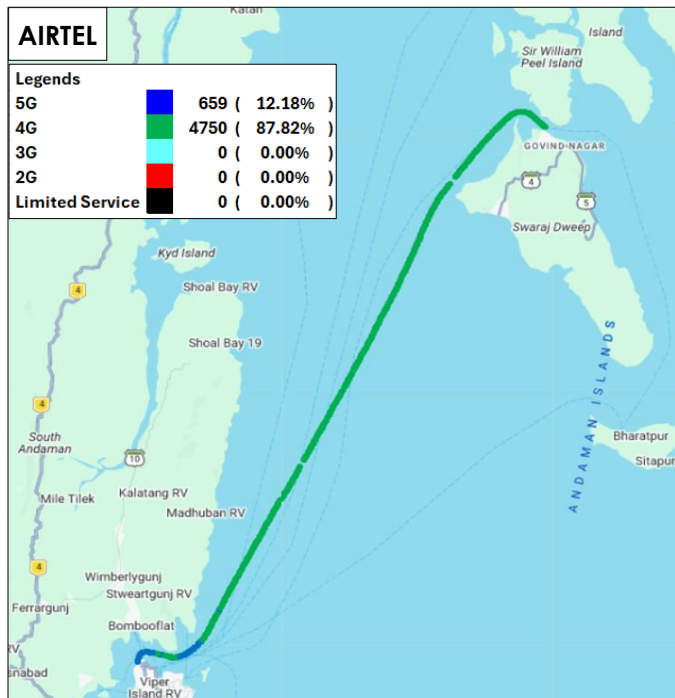


Figure-79: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data – AIRTEL

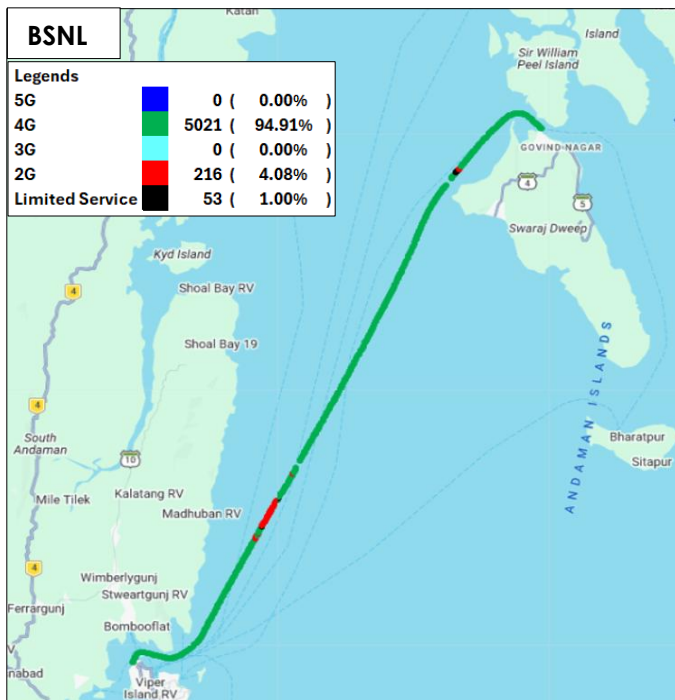


Figure-80: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - BSNL.

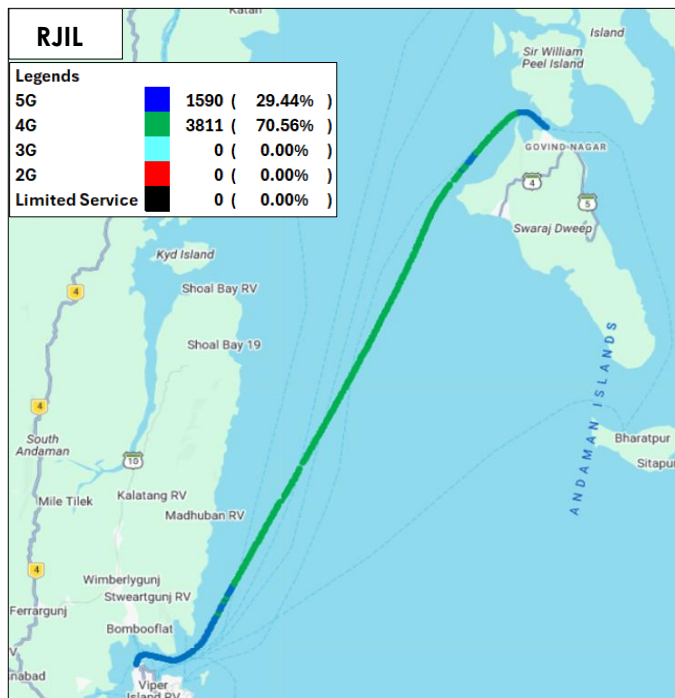


Figure-81: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - RJIL.

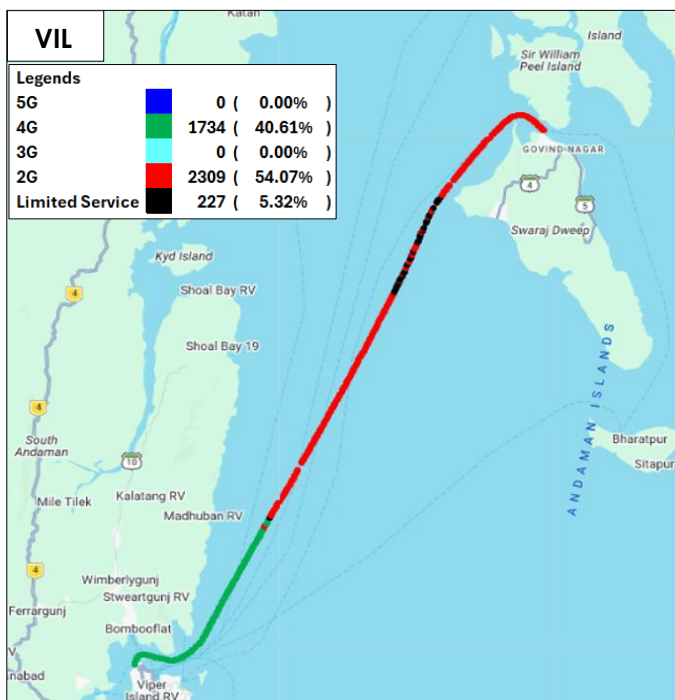


Figure-82: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - VIL.

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-99, 100, 101 & 102 for map view)

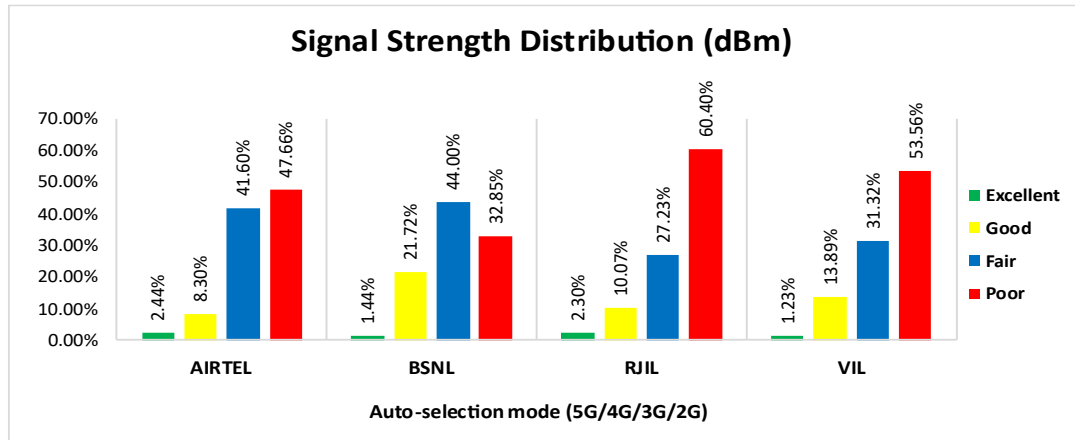


Figure-83: Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

Observations:

- Airtel has 2% of samples falling in the excellent signal strength category.
- BSNL has 1% of samples falling in the excellent signal strength category.
- RJIL has 2% of samples falling in the excellent signal strength category.
- VIL has 1% of samples falling in the excellent signal strength category.

5. Voice & Data Key findings

5.1 Overall Voice

1. Call Setup Success Rate:

- a) Airtel, BSNL and VIL have 86.47%, 85.62% and 90.20% call setup success rate respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL have 88.10%, 81.21%, 96.33% and 81.13% call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- c) Airtel had a 100.00% call setup success when calling BSNL & RJIL whereas call blocking was observed when calling VIL. (refer table-9)
- d) BSNL had a 100.00% call setup success when calling Airtel & RJIL whereas call blocking was observed when calling VIL. (refer table-9)
- e) RJIL & VIL have 100.00% call setup success rate while calling on peer service provider's network for inter-operator calls. (refer table-9)

2. Call Setup Time:

- a) Airtel, BSNL and VIL call setup time is 4.86, 9.37 & 4.85 seconds respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL & VIL call setup time is 2.10, 8.16, 1.17 & 2.75 seconds respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

3. Call Silence/Mute Rate:

In packet switched network (4G/5G) Airtel, BSNL, RJIL and VIL have 4.17%, 4.15%, 7.95% and 5.59% silence call rate respectively. Further Airtel, BSNL, RJIL & VIL downlink RTP packet loss is 2.03%, 5.12%, 4.77% and 2.46% respectively. In uplink Airtel, BSNL, RJIL & VIL RTP packet loss is 2.20%, 4.50%, 3.55% & 2.48% respectively. (refer table-6)

4. Drop Call Rate:

- a) Airtel, BSNL and VIL drop call rate is 3.44%, 9.70% and 4.12% respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL drop call rate is 1.47%, 9.40%, 2.69% and 2.07% respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

5.2 Overall Data

1. Data download and upload performance (Overall i.e. LSA):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 59.57 Mbps, 7.27 Mbps, 66.49 Mbps and 30.76 Mbps respectively. (refer table-11)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 15.61 Mbps, 6.27 Mbps, 16.93 Mbps and 11.66 Mbps respectively. (refer table-11)

2. Data download and upload performance (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 48.79 Mbps, 8.83 Mbps, 47.15 Mbps and 39.10 Mbps respectively. (refer table-32)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 11.06 Mbps, 6.48 Mbps, 9.97 Mbps and 11.06 Mbps respectively. (refer table-32)

3. Data session setup success rate (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL have 80.00%, 94.00%, 100.00% and 64.00% download session setup success rate respectively. (refer table-32)

- b) Airtel, BSNL, RJIL and VIL have 80.00%, 98.00%, 100.00% and 68.00% upload session setup success rate respectively. (refer table-32)

5.3 Operator wise Key Findings

1. Airtel:

Voice

- 86.47% call setup success rate and 3.44% drop call rate have been observed in 3G/2G network mode for LSA/city drive. (refer table-3 & 13)
- 88.10% call setup success rate and 1.47% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. (refer table-5)
- 88.67% call setup success rate and 1.88% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. (refer table-15)
- 80.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at both walk test locations. (refer table-54 & 56)
- 97.37% call setup success rate and 2.70% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for coastal drive. (refer table-60)

Data

- Airtel has 59.57 Mbps average download speed & 15.61 Mbps average upload speed for LSA. (refer table-11)
- Airtel has 67.06 Mbps average download speed & 18.01 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 100 Mbps) except Cellular Jail and Haddo Jetty - Chatham Jetty Haddo - Sri Vijaya Puram for auto-selection mode (5G/4G/3G/2G). (refer table-33, 35, 37, 38, 39 40, 41 & 42)
- All hotspot locations have less upload speed (less than 20 Mbps) except Head Post Office Port Blair - Aberdeen Bazar Shadipur - Sri Vijaya Puram and Phoenix Bay Jetty - Sri Vijaya Puram for auto-selection mode (5G/4G/3G/2G). (refer table-33, 34, 35, 36, 37, 39, 40 & 42)
- Both walk test locations have less download speed (less than 100 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-58 & 59)
- Both walk test locations have less upload speed (less than 20 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-58 & 59)
- Airtel has 17.07 Mbps average download speed & 5.27 Mbps average upload speed across the measured routes for coastal drive. (refer table-62)

2. BSNL:

Voice

- 85.62% call setup success rate and 9.70% drop call rate have been observed in 3G/2G network mode for LSA/city drive. (refer table-3)
- 81.21% call setup success rate and 9.40% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. (refer table-5)

- 80.24% call setup success rate and 14.18% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. (refer table-15)
- 95.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at G. B. Pant Hospital - Atlanta Point - Sri Vijaya Puram walk test location. (refer table-54)
- 91.67% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at High Court and DC Office - Sri Vijaya Puram walk test location. (refer table- 56)
- 54.72% call setup success rate and 3.45% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for coastal drive. (refer table-60)

Data

- BSNL has 7.27 Mbps average download speed & 6.27 Mbps average upload speed for LSA. (refer table-11)
- BSNL has 7.18 Mbps average download speed & 6.13 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 10 Mbps) except Carvins Cove Beach, Chidiyatapu Sunset Point - Sri Vijaya Puram and Pondicherry University Port Blair Campus - Chakargaon Junglighat - Sri Vijaya Puram for auto-selection mode (5G/4G/3G/2G). (refer table-34, 36, 37, 38, 39, 40 & 41)
- NSCB Island Jetty - Ross Island Rd has less upload speed (less than 2 Mbps) out of total 10 hotspots locations for auto-selection mode (5G/4G/3G/2G). (refer table-40)
- G. B. Pant Hospital - Atlanta Point - Sri Vijaya Puram has less download speed (less than 10 Mbps) out of total 2 Walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-58)
- BSNL has 4.03 Mbps average download speed & 4.46 Mbps average upload speed across the measured routes for coastal drive. (refer table-62)

3. RJIL: Voice

- 96.33% call setup success rate and 2.69% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. (refer table-5)
- 95.64% call setup success rate and 3.16% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. (refer table-21)
- 100.00% call setup success rate and 7.69% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at G. B. Pant Hospital - Atlanta Point - Sri Vijaya Puram walk test location. (refer table-54)

- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at High Court and DC Office - Sri Vijaya Puram walk test location. (refer table-56)
- 90.00% call setup success rate and 5.56% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for coastal drive. (refer table-60)

Data

- RJIL has 66.49 Mbps average download speed & 16.93 Mbps average upload speed for LSA. (refer table-11)
- RJIL has 77.61 Mbps average download speed & 20.28 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 100 Mbps) except Head Post Office Port Blair - Aberdeen Bazar Shadipur - Sri Vijaya Puram for auto-selection mode (5G/4G/3G/2G). (refer table-33, 34, 35, 36, 37, 39, 40, 41 & 42)
- All hotspot locations have less upload speed (less than 20 Mbps) except Head Post Office Port Blair - Aberdeen Bazar Shadipur - Sri Vijaya Puram and Phoenix Bay Jetty - Sri Vijaya Puram for auto-selection mode (5G/4G/3G/2G). (refer table-33, 34, 35, 36, 37, 39, 40 & 42)
- Both walk test locations have less download speed (less than 100 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-58 & 59)
- Both walk test locations have less upload speed (less than 20 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-58 & 59)
- RJIL has 34.93 Mbps average download speed & 7.95 Mbps average upload speed across the measured routes for coastal drive. (refer table-62)

4. VIL: Voice

- 90.20% call setup success rate and 4.12% drop call rate have been observed in 3G/2G network mode for LSA/ city drive. (refer table-3)
- 81.13% call setup success rate and 2.07% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. (refer table-5)
- 85.90% call setup success rate and 3.05% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. (refer table-15)
- 74.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at both walk test locations. (refer table-54 & 56)
- 56.25% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for coastal drive. (refer table-60)

Data

- VIL has 30.76 Mbps average download speed & 11.66 Mbps average upload speed for LSA. (refer table-11)

- VIL has 26.54 Mbps average download speed & 10.84 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Chidiyatapu Sunset Point - Sri Vijaya Puram, Haddo Jetty - Chatham Jetty Haddo - Sri Vijaya Puram, Havelock Jetty and Jirkatang Check Post have less download speed (less than 10 Mbps) out of total 10 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-35, 36, 37 & 39)
- Chidiyatapu Sunset Point - Sri Vijaya Puram, Haddo Jetty - Chatham Jetty Haddo - Sri Vijaya Puram, Havelock Jetty and Jirkatang Check Post have less upload speed (less than 2 Mbps) out of total 10 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-35, 36, 37 & 39)
- VIL has 28.99 Mbps average download speed & 10.93 Mbps average upload speed across the measured routes for coastal drive. (refer table-62)

6. Annexure

6.1 Route wise coverage map

6.1.1 City

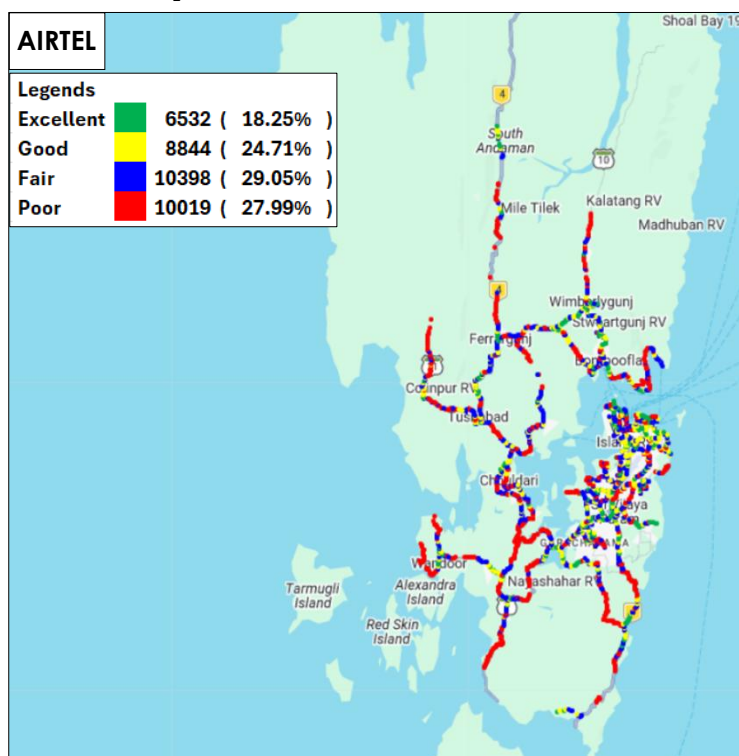


Figure-84: Signal strength 3G/2G network mode voice - AIRTEL.

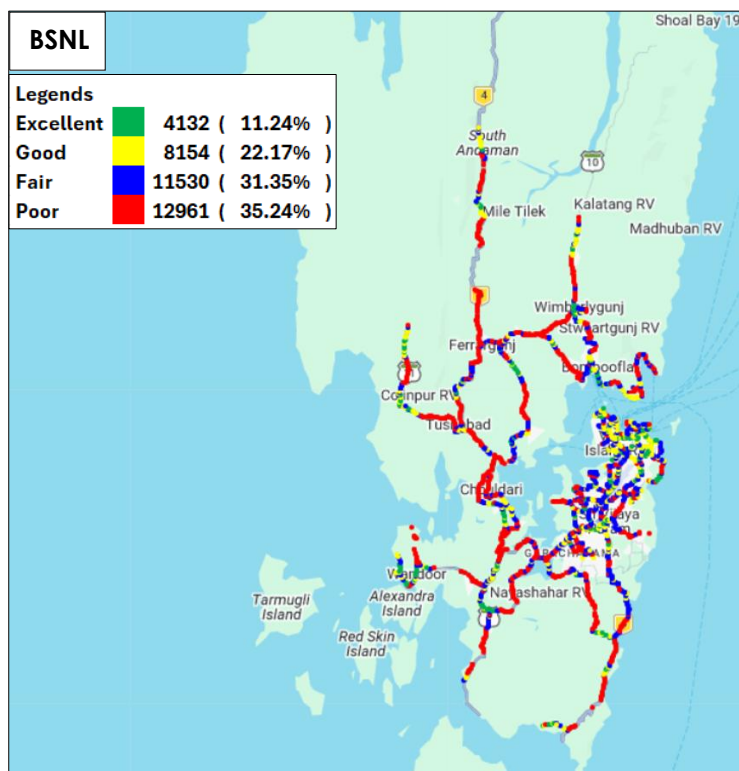


Figure-85: Signal strength 3G/2G network mode voice - BSNL.

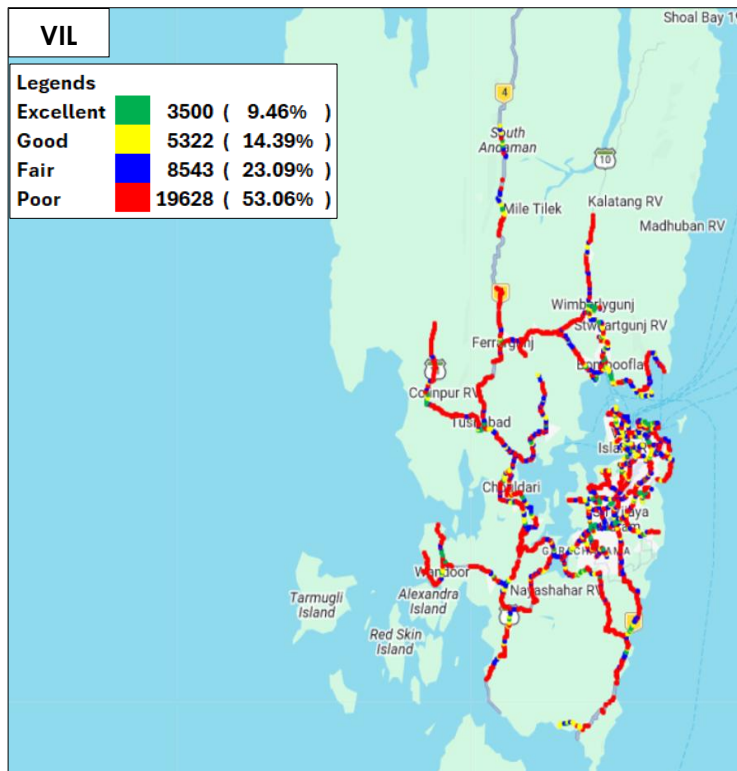


Figure-86: Signal strength 3G/2G network mode voice - VIL.

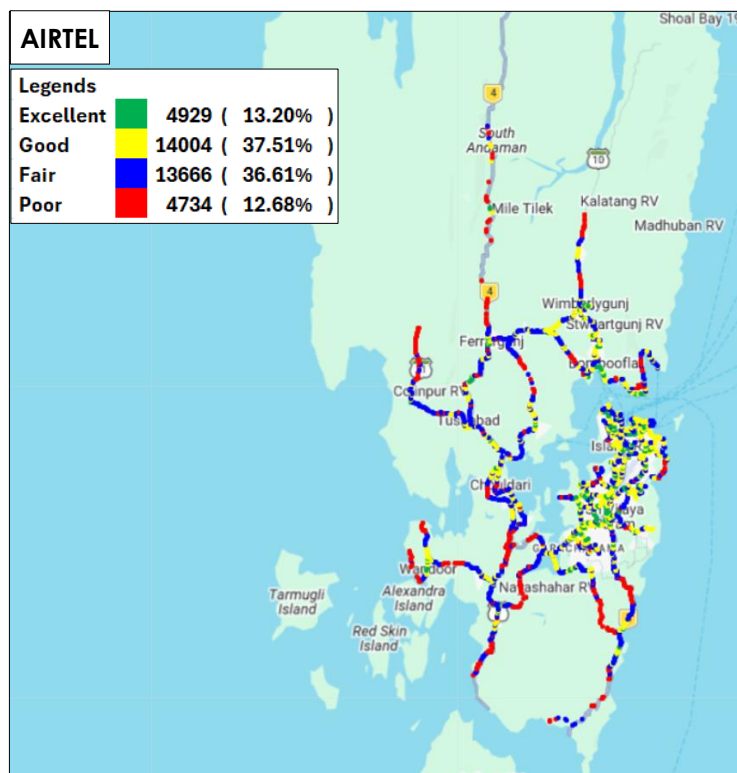


Figure-87: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

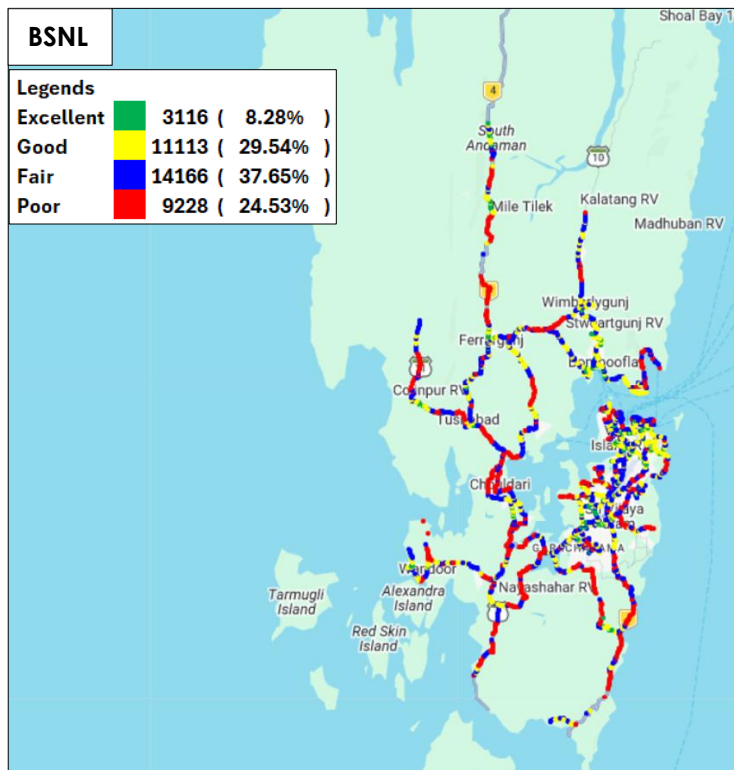


Figure-88: Signal strength auto-selection mode (5G/4G/3G/2G) voice - BSNL.

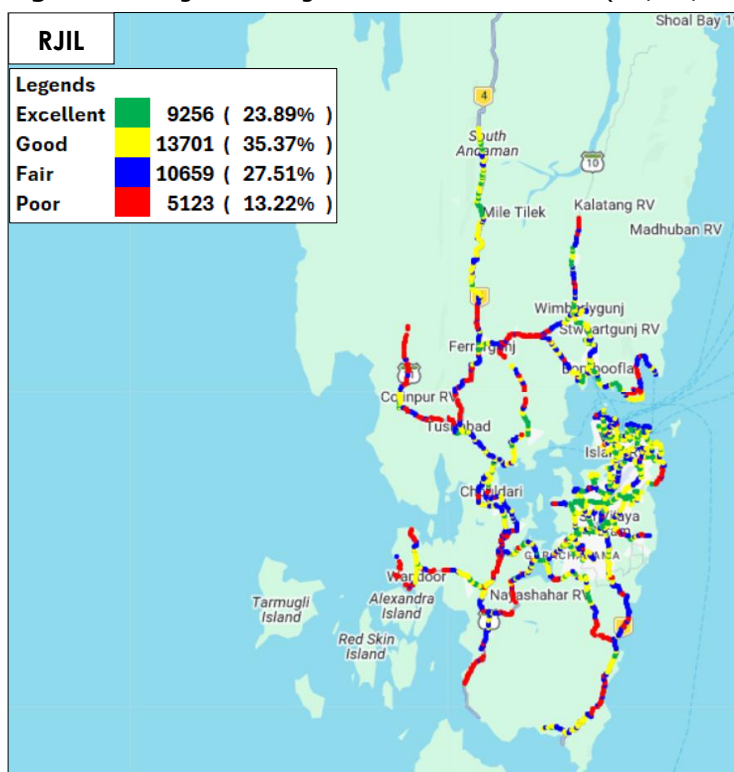


Figure-89: Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

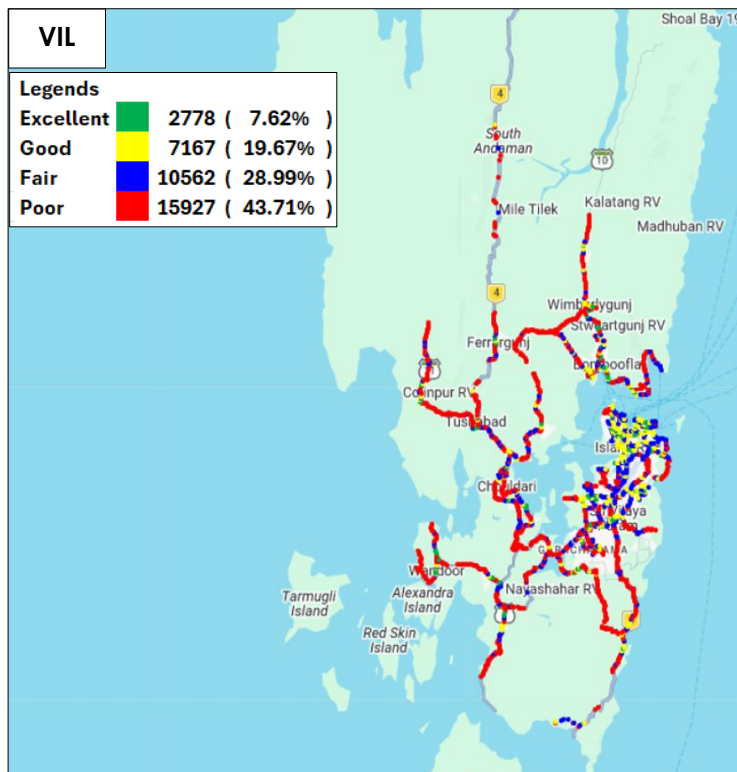


Figure-90: Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.

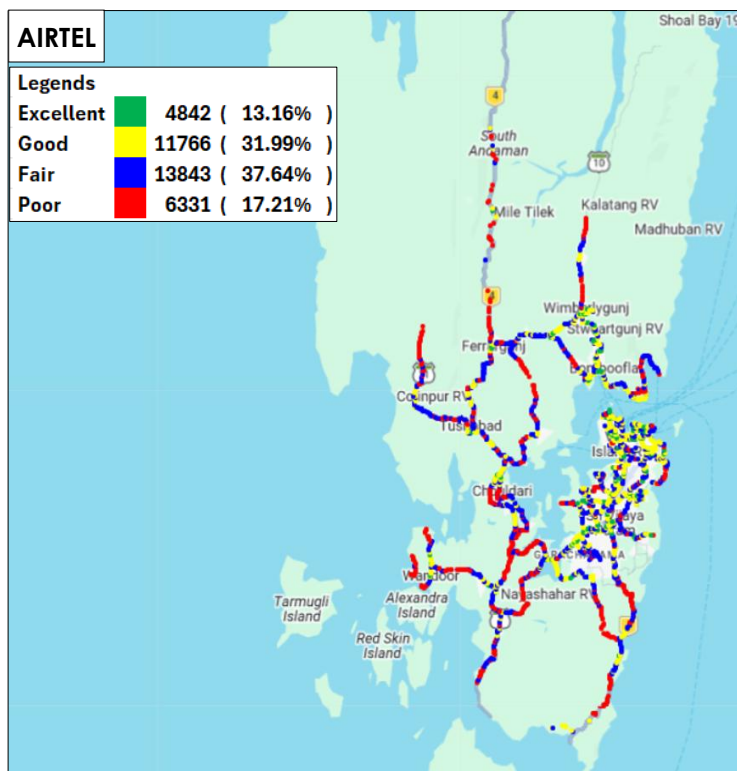


Figure-91: Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

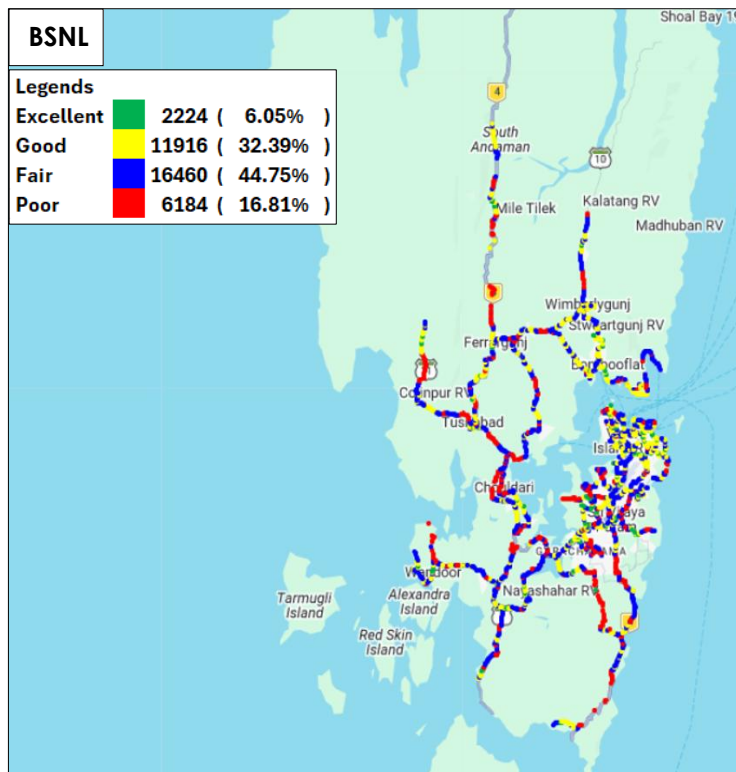


Figure-92: Signal strength auto-selection mode (5G/4G/3G/2G) data - BSNL.

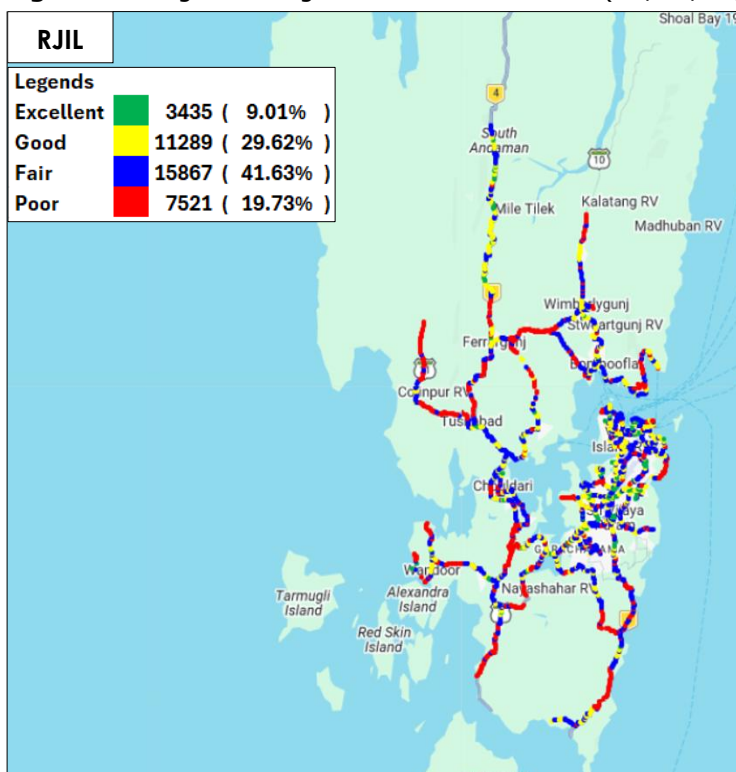


Figure-93: Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

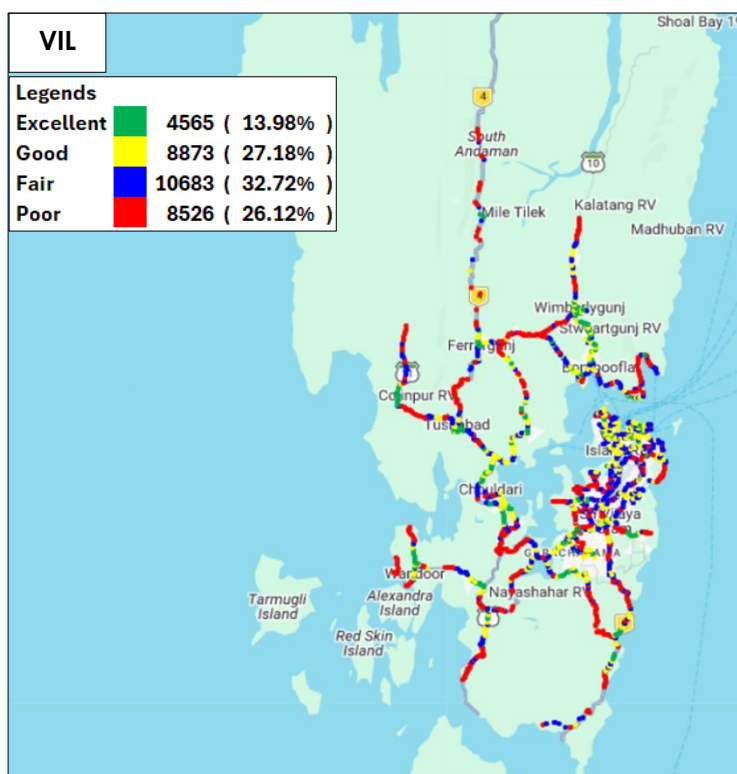


Figure-94: Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

6.1.2 Coastal

i) Port Blair (Sri Vijaya Puram) to Havelock (Swaraj Dweep)

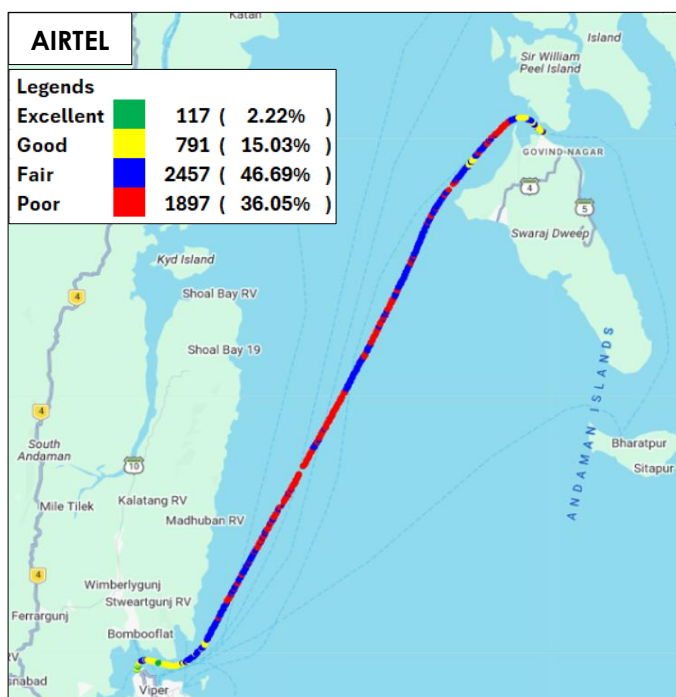


Figure-95: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

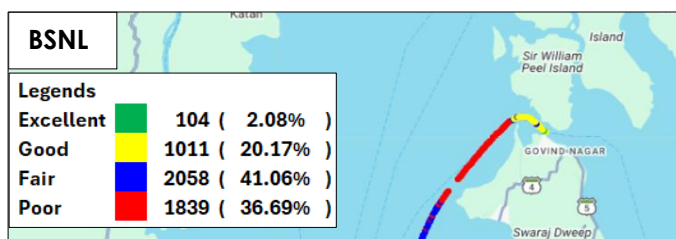


Figure-96: Signal strength auto-selection mode (5G/4G/3G/2G) voice - BSNL.

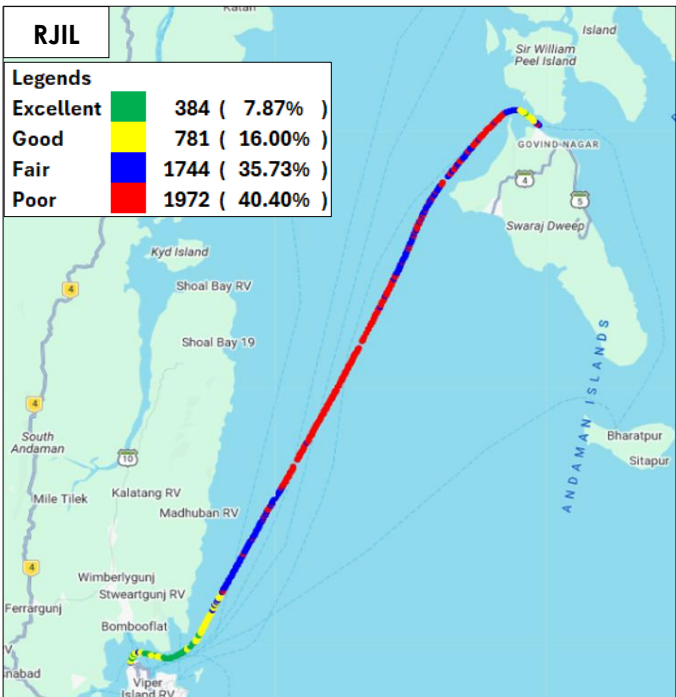


Figure-97: Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

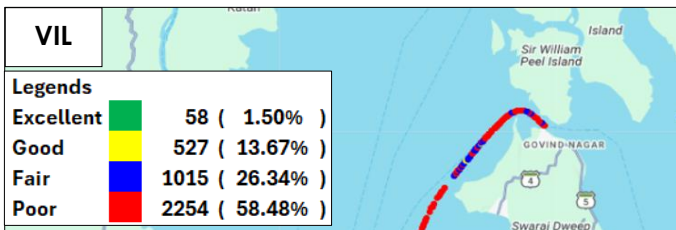


Figure-98: Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.

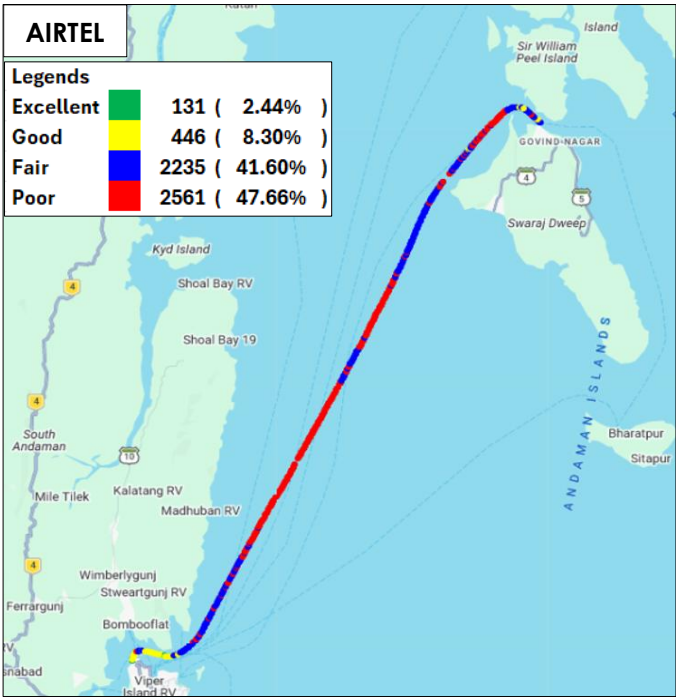


Figure-99: Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

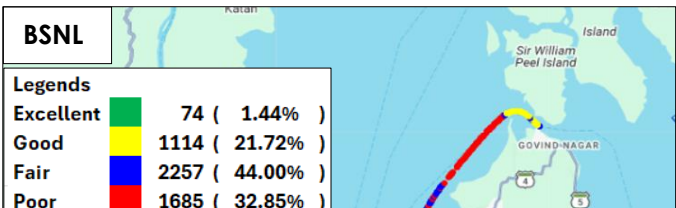


Figure-100: Signal strength auto-selection mode (5G/4G/3G/2G) data - BSNL.

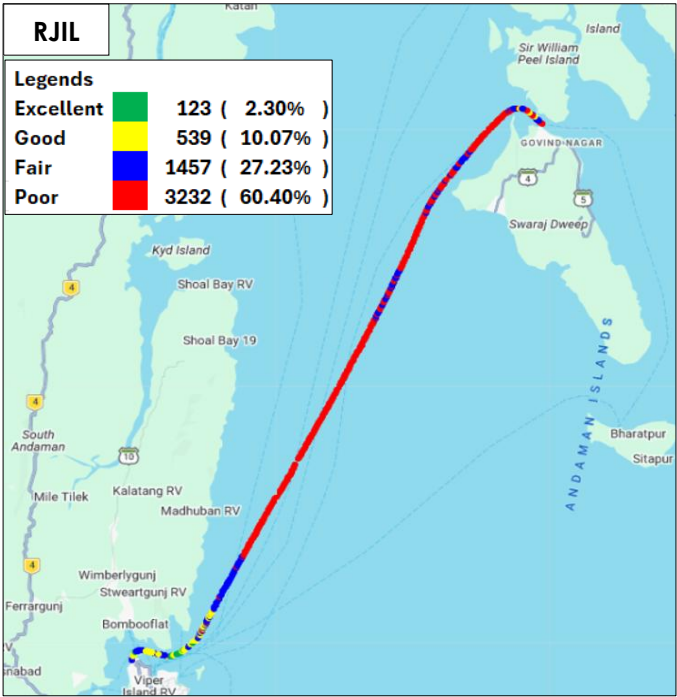


Figure-101: Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

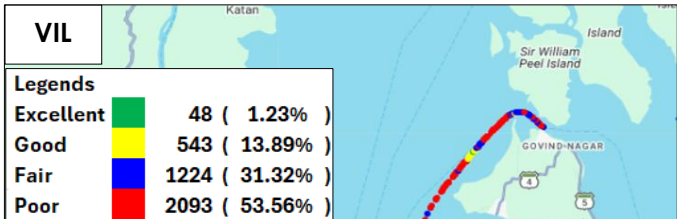


Figure-102: Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions may be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

7.1 Appendix-I

7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	• 3G/2G auto mode- switch Call • 5G/4G/3G/2G auto mode- switch Call • 5G/4G MOS Call	30 Sec
Call Duration		120 seconds
Wait/ Guard Time		15 Sec

Table-64: Voice test detail

Note-

- There is 15 sec wait time after locking and before starting first call in 3G/2G call.
- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.
- Speech quality (MOS) has been measured only in city drive & highway by making Mobile to Mobile call.

Data Test		
Test Type	Technology	Detail
FTP/HTTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
FTP/HTTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)
Web Browsing		3 popular websites (www.google.co.in , www.irctc.co.in , www.sbi.bank.in) 20 sec timeout (only at Hotspot)

Latency & Jitter (TWAMP-UDP)		25 count- Dynamic 500 count- Hotspot Payload- 512 bytes in all drive
Packet Loss Rate (TWAMP-UDP & TCP)		500 counts (TWAMP-UDP) 500 counts (TCP) at each hotspot Payload- 512 bytes in all drive

Table-65: Data test detail

Note-

- 5 Data iteration to be done at each hotspot location.
- Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance.
- TWAMP-UDP & TCP test to be performed only once at hotspot location.
- Youtube & Web browsing test to be performed at static location only.
- All values are taken up to two decimal places with round off.
- Delhi-based TRAI server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing for Airtel, BSNL and RJIL.
- VIL server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing, for VIL.

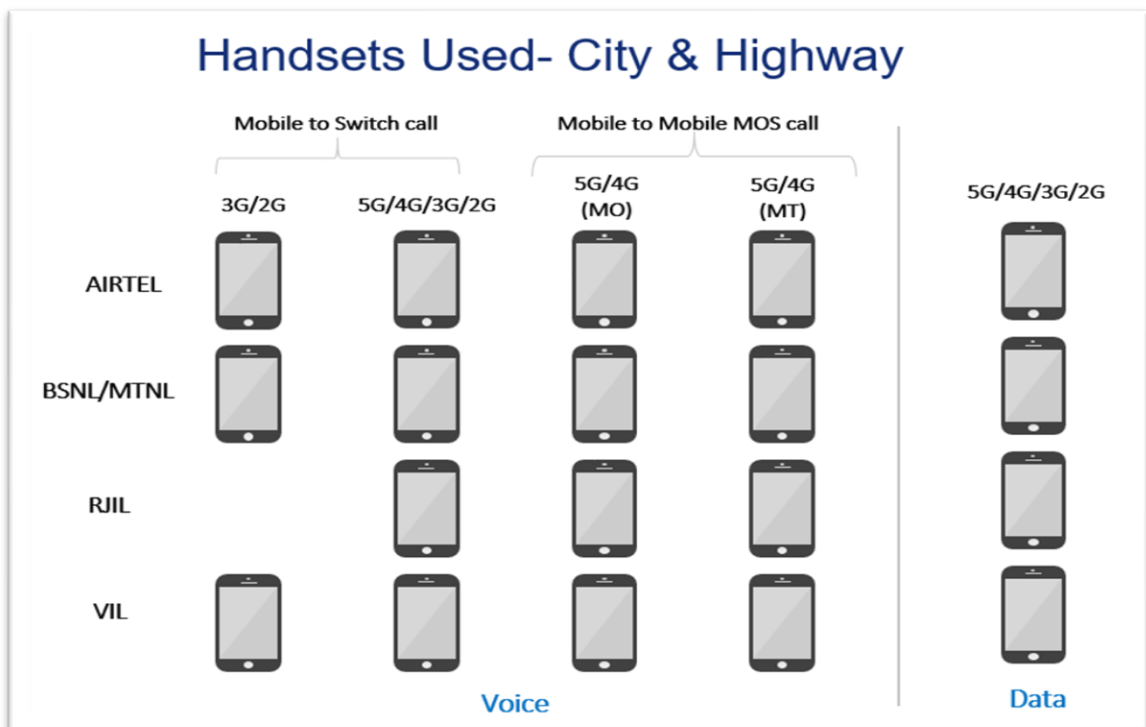


Figure-103: Number of handsets used in city & highway drive

MO: Mobile originating

MT: Mobile terminating

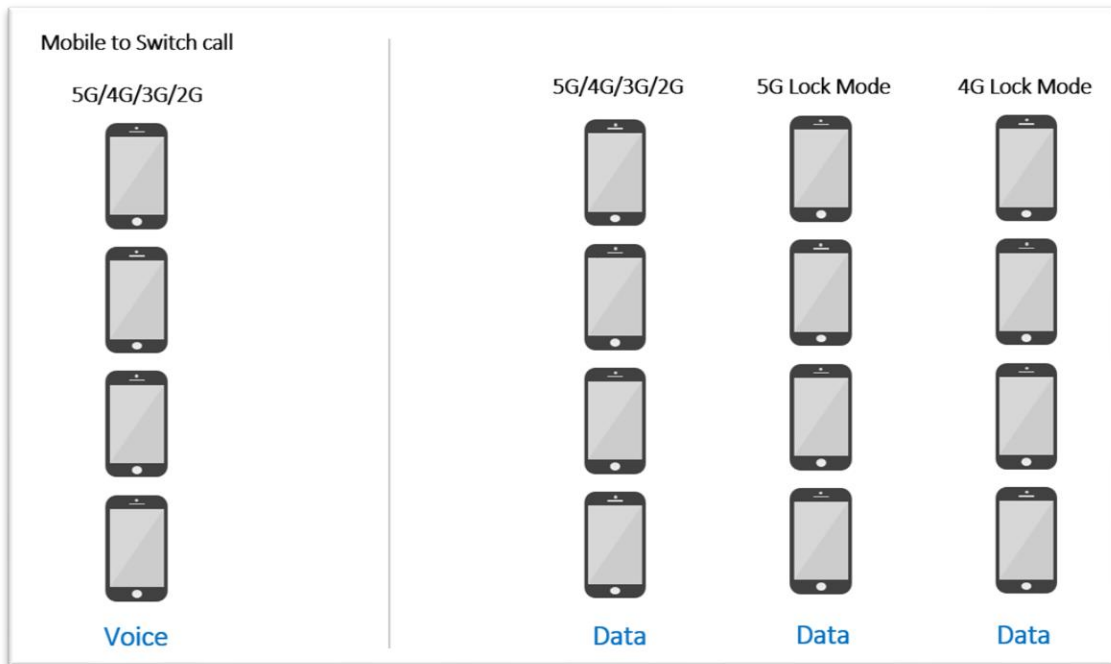


Figure-104: Number of handsets used in railway/metro/walktest/hotspot/ coastal area

Note- 5G & 4G Lock mode testing has been performed at hotspot locations only.

7.1.2 Drive test Methodology

(a) Dynamic voice testing (on the move)

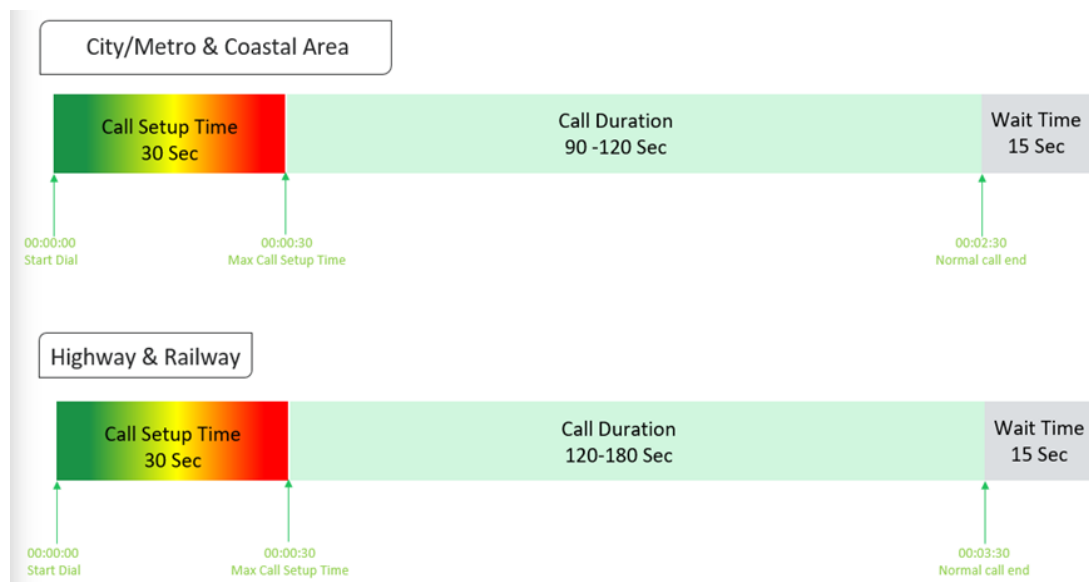


Figure-105: Voice test script for city/railway/metro/highway & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.
- Speech quality (MOS) will be measured only City & Highway drive by making Mobile to Mobile calls.

(b) Hotspot voice testing



Figure-106: Voice test script for walktest/hotspot

- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.

(c) Dynamic Data (internet) test

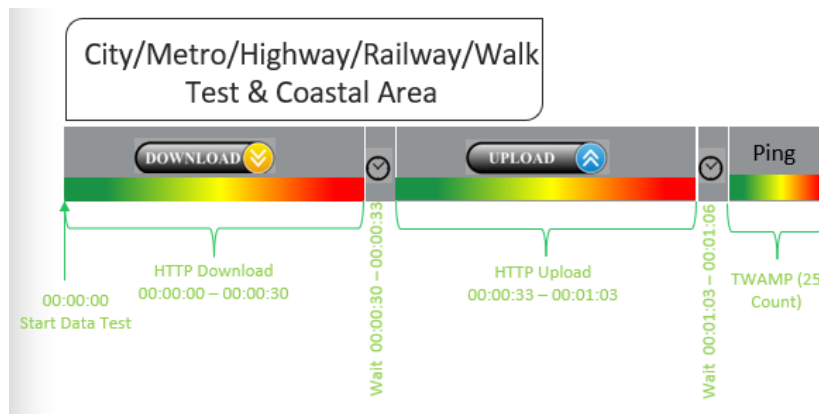


Figure-107: Data test script used in city/metro/railway/highway/walk test & coastal area

(d) Static Data(internet) testing

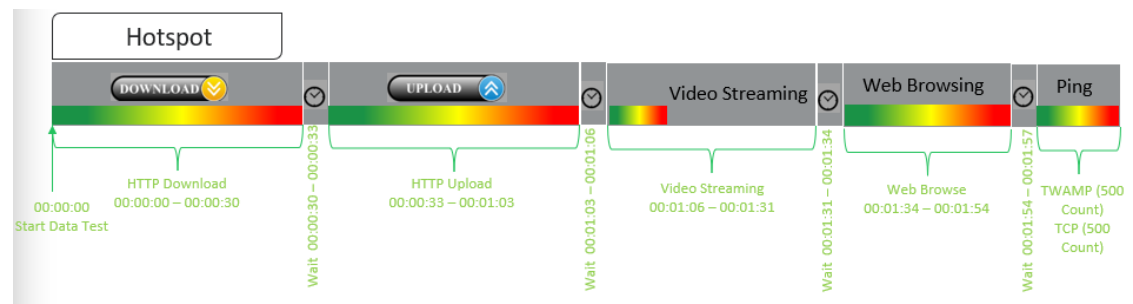


Figure-108: Data test script used at hotspot

- 5 Data iteration done at each hotspot location
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- One ping iteration (with 500 Count of each- TWAMP & TCP) done at hotspot location.

7.2 Appendix-II

7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
Call Setup Success Rate	(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup: (a) Call attempt is made (b) The signaling channel is allocated (c) The call is routed to the outwards path of the terminating network (d) An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement. CSSR = (Total Call Established/ Total Call Attempt) *100 As per QoS Regulation 2024 benchmark value is >=98%
Drop Call Rate	Call drop represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network Drop Call Rate = (Total Call Drop/Total Call Established) *100 As per QoS Regulation 2024 benchmark value is <=2%
Call Setup Time	Time taken from call initiate to call alerting/ringing. Call Setup Time = T2- T1 T2- Ringing (VoLTE/VoNR) & Alerting (for WCDMA & GSM), T1- Invite (VoLTE/VoNR) & CM Service Request (for WCDMA & GSM)
Voice Quality (MOS)	Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as: Excellent: MOS ≥ 4 and < 5 Good : MOS ≥ 3 and < 4 Fair : MOS ≥ 2 and < 3 Poor : MOS ≥ 1 and < 2
Handover Success Rate	Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100 Handover type which are considered- 2G Inter & Intra cell, 3G Soft & IRAT, 4G Inter & Intra frequency & SRVCC, 5G Inter & Intra frequency & 5G to 4G handovers.
Silence Call	A call which has ≥ 4 sec continuous RTP gap is considered as a Silence Call. Silence call rate = (count of silence call / Total calls established) *100 If a call observes multiple silence count ≥ 4 sec in a particular established call it has been taken as one silent event.

Jitter	The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If S_i is the RTP timestamp from packet i, and R_i is the time of arrival in RTP timestamps units for packet i, then for two packets i and j the inter-arrival jitter D can be expressed as: $D(i,j) = (R_j - R_i) - (S_j - S_i)$ The interarrival jitter is calculated continuously as each data packet i is received from source $SSRC_n$, using this difference D for that packet and the previous packet $i-1$ in order of arrival (not necessarily in sequence), according to the formula $J(i) = J(i-1) + (D(i-1,i) - J(i-1))/16$ or 8																																		
Downlink Packet Drop Rate	Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE)																																		
Uplink Packet Drop Rate	Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).																																		
Signal Strength	Signal strength is the signal power level received by the wireless user. <table><tr><th rowspan="2">Parameter Name</th><th rowspan="2">Technology</th><th colspan="4">Signal Strength (dBm)</th></tr><tr><th>Excellent</th><th>Good</th><th>Fair</th><th>Poor</th></tr><tr><td>Rx Level</td><td>GSM</td><td>0 to ≥ -65</td><td><-65 to ≥ -75</td><td><-75 to ≥ -85</td><td><-85 to min</td></tr><tr><td>RSCP</td><td>WCDMA</td><td>0 to ≥ -70</td><td><-70 to ≥ -80</td><td><-80 to ≥ -90</td><td><-90 to min</td></tr><tr><td>RSRP</td><td>LTE</td><td>0 to ≥ -80</td><td><-80 to ≥ -95</td><td><-95 to ≥ -110</td><td><-110 to min</td></tr><tr><td>SS_RSRP</td><td>NR</td><td>0 to ≥ -80</td><td><-80 to ≥ -95</td><td><-95 to ≥ -110</td><td><-110 to min</td></tr></table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to ≥ -65	<-65 to ≥ -75	<-75 to ≥ -85	<-85 to min	RSCP	WCDMA	0 to ≥ -70	<-70 to ≥ -80	<-80 to ≥ -90	<-90 to min	RSRP	LTE	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min	SS_RSRP	NR	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to ≥ -65	<-65 to ≥ -75	<-75 to ≥ -85	<-85 to min																														
RSCP	WCDMA	0 to ≥ -70	<-70 to ≥ -80	<-80 to ≥ -90	<-90 to min																														
RSRP	LTE	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min																														
SS_RSRP	NR	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min																														

Table-66: Network performance parameter and definition voice

7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
Download Speed (Mbps)	The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device. Download Speed = Total bytes transferred during download / Total time for transfer 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for download throughput in dynamic drive and Hotspot combine data
Upload Speed (Mbps)	The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server. Upload Speed = Total bytes transferred during upload / Total time for transfer. 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for upload throughput in dynamic drive and Hotspot combine data.
Download Session Setup Success Rate	(total download session established (successfully connected to server)/ total download session attempt) *100. This KPI has been calculated for Hotspot only.

Upload Session Setup Success Rate	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
Web Page Download Time	Web browsing test is used to measure performance in terms of opening a web/HTTP page. Time taken to open the web page successfully is considered as web browsing delay/web page download time.
Video Streaming Delay	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
Latency (TWAMP-UDP)	Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again. The Latency is measured in milliseconds (ms). To calculate the one-way latency, we just do half of the round-trip time. 50th percentile of one-way latency has been reported.
Jitter (TWAMP-UDP)	Measure of variation in time in arrival of packets from a source to destination The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL $IPDV(i) = D(i) - D(i-1)$ then Stdvs of IPDV is considered as jitter.
Packet Loss Rate (TWAMP-UDP & TCP)	Number of packets lost out of total packet transferred during test. Packet loss rate = (Total packet lost / Total packet sent) *100 * Packet delay (using TWAMP-UDP & TCP) >90 ms considered as packet loss and included in packet loss rate. * Packet loss rate is calculated based on TWAMP-UDP & TCP. *90th percentile for Packet loss rate has been reported in overall Hotspot performance summary.

Table-67: Network performance parameter and definition Data

Disclaimer: The observations presented above and, in the reports, represent the performance of the service providers on the area/route under test on the day/time of conducting the drive test and no inference whatsoever may be drawn regarding the quality of the telecom service by the service providers in the whole city/state/licensed service area.

Hardik
Rajeshbhai
Patel

Digitally signed by
Hardik Rajeshbhai Patel
Date: 2026.09.11
10:06:16 +05'30'