



TELECOM REGULATORY AUTHORITY OF INDIA

Independent Drive Test Report

Karnataka LSA

August 2026

Contents

1. Introduction	3
2. Executive Summary (LSA)	3
2.1 Drive test details	3
2.2 Drive test routes	4
2.3 Summary of areas covered	4
2.4 Telecom service providers detected frequency bands	5
2.5 Key findings of Independent Drive Test.....	6
3. QoS performance analysis-LSA level.....	8
3.1 Overview.....	9
3.2 Voice performance.....	9
3.3 Data performance.....	12
4. Detailed QoS performance analysis	14
4.1 Overview.....	14
4.2 City	14
4.2.1 Drive test route.....	14
4.2.2 Areas covered	14
4.2.3 Voice performance.....	14
4.2.4 Data performance.....	28
4.3 Hotspots	36
4.3.1 Locations.....	36
4.3.2 Hotspot covered	36
4.3.3 Voice performance.....	36
4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)	39
4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)	44
4.4 Walk Test	47
4.4.1 Walk test locations	47
4.4.2 Walk Test Covered.....	47
4.4.3 Voice Performance.....	47
4.4.4 Data Performance.....	48
4.5 Highway	50
4.5.1 Drive test route.....	50
4.5.2 Routes Covered.....	50
4.5.3 Voice performance.....	50
4.5.4 Data performance.....	63

5. Voice & Data Key findings	71
5.1 Overall Voice.....	71
5.2 Overall Data	71
5.3 Operator wise Key Findings.....	72
6. Annexure	76
6.1 Route wise coverage map	76
6.1.1 City	76
6.1.2 Highway	81
7. Appendix	87
7.1 Appendix-I	87
7.1.1 Drive test setup	87
7.1.2 Drive test Methodology	89
7.2 Appendix-II	91
7.2.1 Network Performance Parameters for Voice calls	91
7.2.2 Network Performance Parameters Data tests	92

1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet the required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interests of the consumers of telecommunications services.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

2. Executive Summary (LSA)

2.1 Drive test details

This report covers the findings of the IDT undertaken in Karnataka License Service Area (LSA) during the month of August-2026 under the supervision of TRAI Regional Office (RO) Bengaluru. Details of route/area covered during the IDT are as given below:

S. No	Drive test route	Type of route	Distance covered (KMs)	From date	To date
1	Vijayanagara District	City	439.8	11-Aug-2026	13-Aug-2026
2	Hosapete	Inter Operator Calling	1 Location	14-Aug-2026	14-Aug-2026
3	Vijayanagara District	Hotspot	13 Locations	11-Aug-2026	14-Aug-2026
4	Hosapete & Hampi	Walk test	7.6	11-Aug-2026	12-Aug-2026
5	Hosapete to Banavikallu via NH-50	Highway	74.0	11-Aug-2026	11-Aug-2026

Table-1: Drive test summary.

2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, Inter-operator call test, hotspots, walk test and highway as per the legends shown on the map.

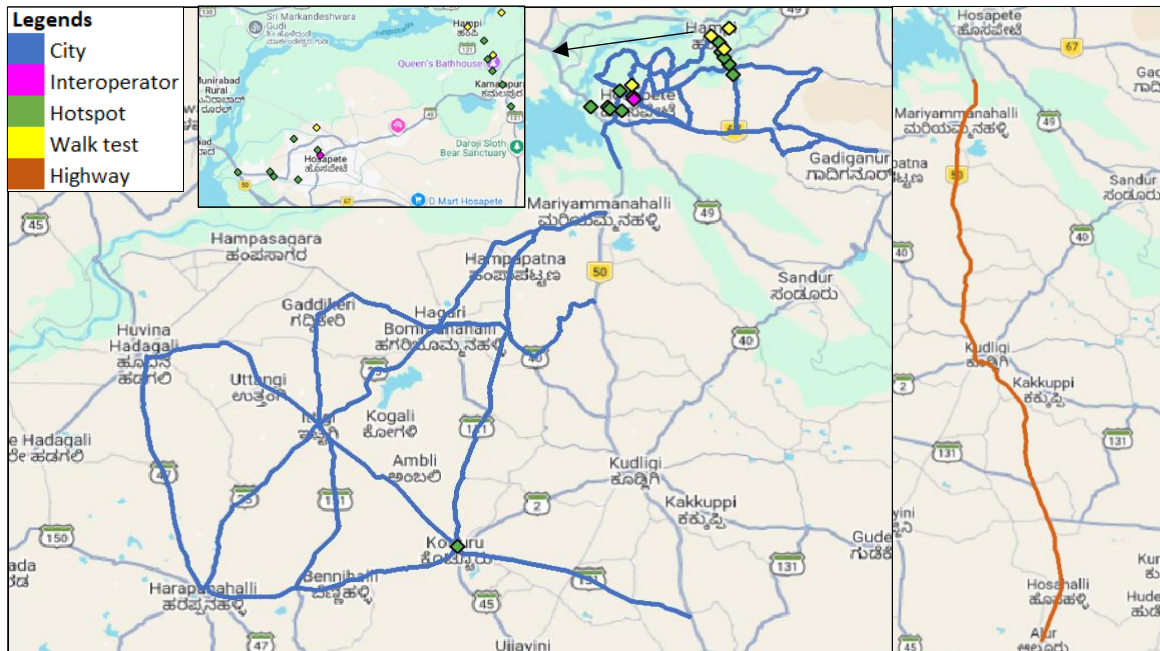


Figure-1: Drive test routes.

2.3 Summary of areas covered

a) City- Hampi, Kamalapura, Hosapete, Anekal, Mariyammanahalli, Chilakanahatti, Hampapatna, Hagaribommanahalli, Dharmasagara, Holagundi, Kotturu, Banavikallu, Gaddikeri, Alabur, Chigateri, Ittigi, Harapanahalli, and Haregondanahalli etc.

b) Hotspot

1. Achyutaraya Temple Complex Hampi
2. District Court Complex Hosapete
3. Government CHC Kamlapura
4. Hampi Utsav Grounds and Tourist Parking Area
5. Hosapete APMC Yard
6. Hosapete City Municipal Council Office
7. Kamalapura Archaeological Museum (ASI Museum)
8. Karnataka One Centre Hosapete
9. Kotturu Bus Stand
10. Queen's Bath Hampi
11. Superintendent Of Police Office Hosapete
12. Tungabhadra Dam Entrance & Garden
13. Vijayanagara Deputy Commissioner Office Hosapete

c) Walk Test

1. Hosapete Junction Railway Station
2. Lotus Mahal - Hampi
3. Vijaya Vitthal Temple
4. Virupaksha Temple Complex

d) Highway- Hosapete to Banavikallu passing through Mariyammanahalli, Danayakanakere, Chilakanahatti, Thimplapura, Shivapura, Kudligi and Kakuppi etc.

2.4 Telecom service providers detected frequency bands

Technologies covered during the IDT and frequency bands in use are summarised in table below:

S.no.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	900
2	Bharti Airtel Ltd.	4G	900,1800,2100,2300
3	Bharti Airtel Ltd.	5G	3500
4	BSNL	2G	900
5	BSNL	3G	2100
6	BSNL	4G	700,2100
7	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
8	Reliance JIO Infocomm Ltd.	5G	700,3500
9	Vodafone Idea Ltd.	2G	900,1800
10	Vodafone Idea Ltd.	4G	900,1800,2100

Table-2: Telecom service provider (TSP) covered in IDT.

2.5 Key findings of Independent Drive Test

1. Drive Test Area: The overall mobile network performance across Vijayanagara city (Karnataka LSA) for the key Parameters has been summarized below:

a) Coverage Gap - The signal strength observed during voice testing on the drive test route in auto-selection mode (5G/4G/3G/2G). (refer figure- 29 to 32)

Parameter	AIRTEL	BSNL	RJIL	VIL
Total Number of Samples captured on Drive test route	52309	48469	52578	51328
Number of Samples having poor signal strength	3067	18387	2750	8930
Number of Samples having limited service (No Coverage)	148	1938	0	194

b) Dropped Calls - The TSP-wise details of dropped calls in auto selection mode (5G/4G/3G/2G). (refer figure-15 to 18)

Parameter	AIRTEL	BSNL	RJIL	VIL
Number of successful Calls Established	471	425	478	467
Number of dropped Calls	1	37	2	8

c) Call Silence Instance - The TSP-wise details of Call silence instance in Auto-selection mode (5G/4G). (refer figure-19 to 22)

Parameter	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider network)	533	367	459	453
Number of silences calls for >3 Sec	13	33	10	59
Total number of silence instances for >3 Sec	20	45	12	100

d) Packet loss rate Downlink & Uplink- The TSP-wise details of packet loss rate in downlink & uplink for Auto-selection mode (5G/4G).

Parameter	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider network)	533	367	459	453
Packet loss Rate Downlink %	1.22	5.16	1.50	2.67
Packet loss Rate Uplink %	0.83	4.19	0.66	2.40

e) Data Download and Upload Throughput:

i) Data Download Throughput: The TSP-wise details of **Average Download (DL) throughput** against declared typical DL Throughput for month, in Auto-selection mode (5G/4G/3G/2G). (refer figure- 34 to 37)

Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 4G)
Typical Download Throughput declared by TSP	(Mbits/s)	23.00	10.58	15.00	15.00
Average Download Throughput measured during IDT	(Mbits/s)	87.50	10.47	151.30	22.09

ii) Data Upload Throughput - The TSP-wise details of **Average Upload (UL) throughput** against declared typical UL Throughput for month, in Auto-selection mode (5G/4G/3G/2G). (refer figure- 38 to 41)

Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 4G)
Typical Upload Throughput declared by TSP	(Mbits/s)	10.00	3.23	7.00	8.00
Average Upload Throughput measured during IDT	(Mbits/s)	20.69	5.41	14.00	10.77

- 2. Drive Test Route:** The overall mobile network performance on Hosapete to Banavikallu highway route via NH-50 (Karnataka LSA) for the key Parameters has been summarized below:

- a) Coverage Gap-** The signal strength observed during voice testing on the drive test route in auto-selection mode (5G/4G/3G/2G). (refer figure- 69 to 72)

Parameter	AIRTEL	BSNL	RJIL	VIL
Total Number of Samples captured on Drive test route	5431	4759	5409	5303
Number of Samples having poor signal strength	208	1512	152	1063
Number of Samples having limited service (No Coverage)	0	481	0	8

- b) Dropped Calls-** The TSP-wise details of dropped calls in auto selection mode (5G/4G/3G/2G). (refer figure-58 & 59)

Parameter	AIRTEL	BSNL	RJIL	VIL
Number of successful Calls Established	27	23	27	28
Number of dropped Calls	0	3	0	3

- c) Call Silence Instance-** The TSP-wise details of Call silence instance in Auto-selection mode (5G/4G). (refer figure-60, 61 & 62)

Parameter	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider network)	23	21	21	23
Number of silences calls for >3 Sec	0	4	1	1
Total number of silence instances for >3 Sec	0	6	1	4

- d) Packet loss rate Downlink & Uplink-** The TSP-wise details of packet loss rate in downlink & uplink for Auto-selection mode (5G/4G).

Parameter	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider network)	23	21	21	23
Packet loss Rate Downlink %	0.55	4.89	1.43	0.50
Packet loss Rate Uplink %	0.54	5.02	0.39	0.39

- e) Data Download and Upload Throughput:**

- i) Data Download Throughput:** The TSP-wise details of **Average Download (DL) throughput** against declared typical DL Throughput for month, in Auto-selection mode (5G/4G/3G/2G). (refer figure- 74 to 77)

Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 4G)
Typical Download Throughput declared by TSP	(Mbits/s)	23.00	10.58	15.00	15.00
Average Download Throughput measured during IDT	(Mbits/s)	109.91	6.12	269.09	31.44

- ii) Data Upload Throughput:** The TSP-wise details of **Average Upload (UL) throughput** against declared typical UL Throughput for month, in Auto-selection mode (5G/4G/3G/2G). (refer figure- 78 to 81)

Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 4G)
Typical Upload Throughput declared by TSP	(Mbits/s)	10.00	3.23	7.00	8.00
Average Upload Throughput measured during IDT	(Mbits/s)	21.98	2.73	19.29	15.20

QoS Performance Analysis- Karnataka LSA

3. QoS performance analysis-LSA level

3.1 Overview

This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the Karnataka LSA during the month of August-2026 covering city drive, hotspots, walk test and highway. (Refer Table 1)

3.2 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	482	706	482
Call Setup Success Rate %	99.17	48.16	99.17
Drop Call Rate %	0.21	6.18	1.88
Call Setup Time-Average (Second)	4.16	2.61	4.12
Handover Success Rate %	99.25	99.61	97.29

Table-3: Summary of voice call performance in 3G/2G network mode only.

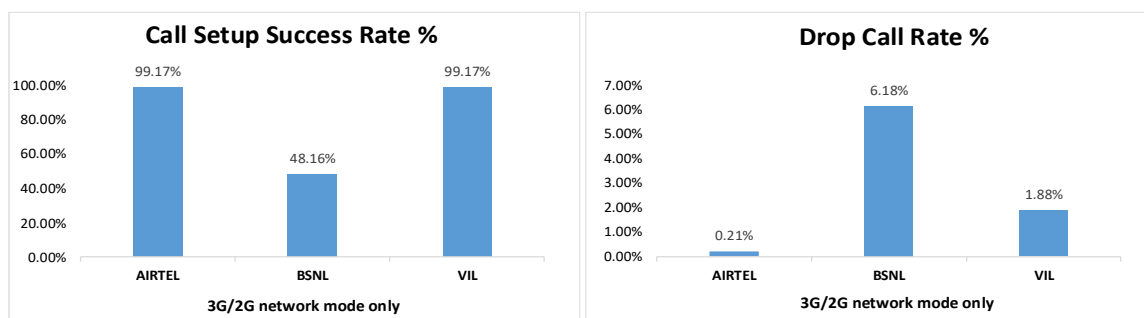


Figure-2: Call setup success rate and drop call rate performance.

Number of unique cell Id's covered in Voice test- Technology wise			
Technology	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
3G	NA	83	NA
2G	376	83	256

Table-4: Technology wise number of network cell Id's latched during drive test.

Note-

- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.

(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	709	791	708	721
Call Setup Success Rate %	98.87	82.05	99.86	94.31
Drop Call Rate %	0.14	6.16	0.57	1.76
Call Setup Time-Average (Second)	0.40	1.49	0.69	1.31
Handover Success Rate %	99.85	99.93	99.73	99.86

Table-5: Summary of voice call performance in network auto-selection mode.

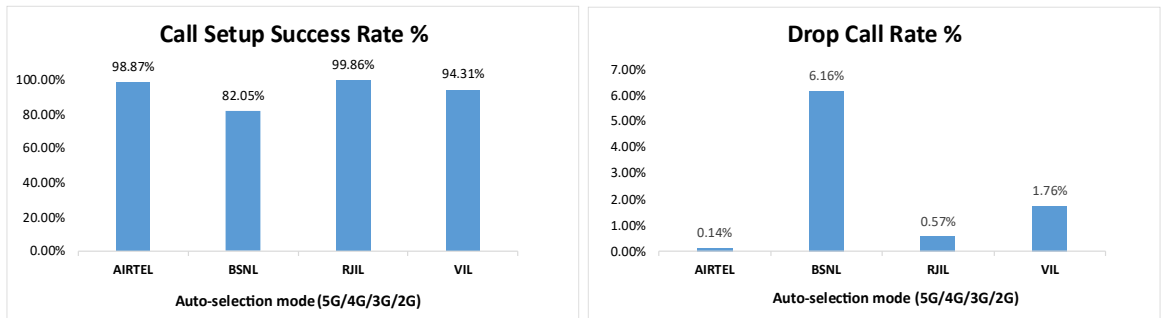


Figure-3: Performance for call setup success rate and drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G – Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	556	388	480	476
Number of silences call for >4 Sec	10	24	6	36
Silence Call Rate %	1.80	6.19	1.25	7.56
Number of silence instances for >4 Sec	13	32	7	48
Number of silence instances for >3 Sec	20	51	13	104
Number of silence instances for >2 sec	43	72	26	142
RTP Jitter (4G & 5G) in ms	3.79	5.82	11.27	14.16
Packet loss Rate Downlink %	1.19	5.14	1.50	2.57
Packet loss Rate Uplink %	0.81	4.24	0.64	2.32

Table-6: Summary of silence instances & packet loss rate for mobile to mobile calls.

Number of unique cell Id's covered in Voice test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	398	NA
4G	741	232	800	512
3G	NA	66	NA	NA
2G	2	65	NA	71

Table-7: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

(c) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile-to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls table-6	2819	2240	2947	2812
Speech Quality (Average MOS)	3.87	3.36	4.39	3.73
Number of samples with MOS ≥ 4 to < 5 (Excellent)	1858	1164	2508	1645
Number of samples with MOS ≥ 3 to < 4 (Good)	788	234	238	834
Number of samples with MOS ≥ 2 to < 3 (Fair)	108	510	85	150
Number of samples with MOS ≥ 1 to < 2 (Poor)	65	332	116	183
%age of samples with MOS ≥ 4 to < 5 (Excellent)	65.91%	51.96%	85.10%	58.50%
%age of samples with MOS ≥ 3 to < 4 (Good)	27.95%	10.45%	8.08%	29.66%
%age of samples with MOS ≥ 2 to < 3 (Fair)	3.83%	22.77%	2.88%	5.33%
%age of samples with MOS ≥ 1 to < 2 (Poor)	2.31%	14.82%	3.94%	6.51%

Table-8: Summary of speech quality (MOS) samples.

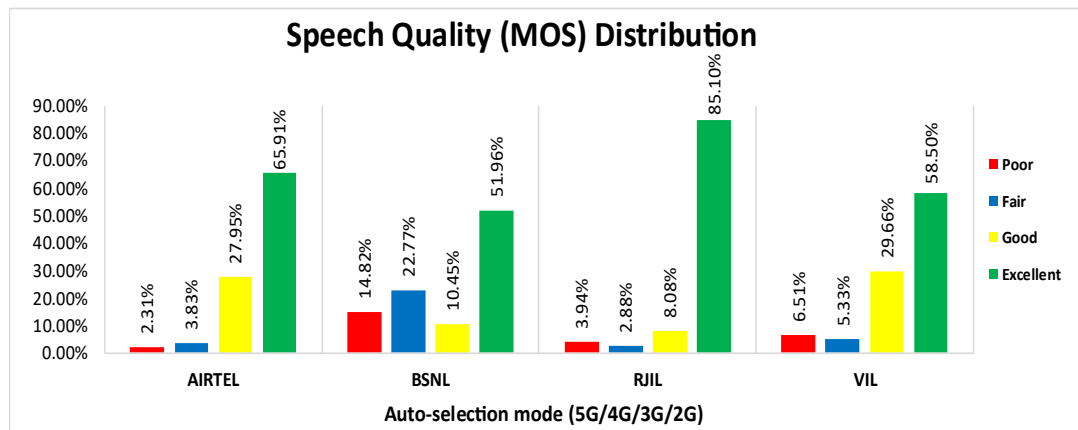


Figure- 4: Distribution of samples in MOS range.

(d) Inter-service provider voice call performance: To check the performance of inter-service providers call setup success rate, total 15 to 16 inter operator calls were attempted at one location which is Municipal Council Office, Hosapete. The call setup success rate and call setup time observation is as below.

Call Setup Success Rate %				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	100.00	100.00	100.00
BSNL	100.00	NA	100.00	100.00
RJIL	100.00	93.75	NA	93.75
VIL	100.00	100.00	100.00	NA

Table-9: Call setup success rate across service providers.

Note-

- NA- Only inter-operator calls were measured during test.

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	2.50	1.17	3.06
BSNL	3.50	NA	2.54	3.18
RJIL	1.57	1.67	NA	1.57
VIL	2.13	1.71	1.71	NA

Table-10: Call setup time across service providers.

Note-

- NA- Only inter-operator calls were measured during test.

3.3 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	90.99	9.18	169.51	23.40
	80 th Percentile	124.88	14.09	335.98	39.17
	20 th Percentile	22.05	2.73	9.48	3.60
Upload Throughput (Mbits/s)	Average	20.87	5.07	15.34	11.29
	80 th Percentile	30.45	8.11	29.59	19.48
	20 th Percentile	3.98	1.23	1.63	2.14
Latency (ms)	50 th Percentile	27.85	60.26	28.49	35.17

Table-11: Summary of data performance in network auto-selection mode.

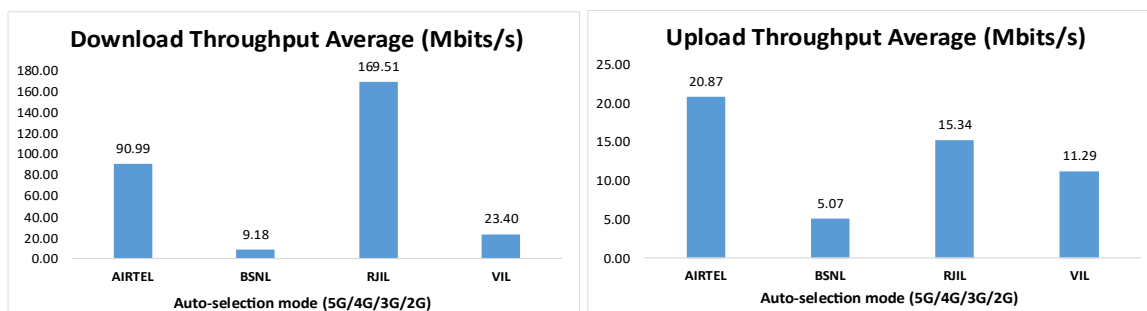


Figure- 5: Download and Upload throughput.

Number of unique cell Id's covered in Data test- Technology wise				
Technology	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	394	NA
4G	896	256	709	474
3G	NA	40	NA	NA
2G	7	41	NA	52

Table-12: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

Detailed QoS Performance Analysis

4. Detailed QoS performance analysis

4.1 Overview

This section covers analysis on performance of various categories of drives like city, hotspots, walk test and highway for all telecom service providers, the results of drive tests conducted are shown individually for respective areas/locations.

4.2 City

Drive test has been conducted from 11th August 2026 to 13th August 2026 in Vijayanagara District. (Refer Table-1)

4.2.1 Drive test route

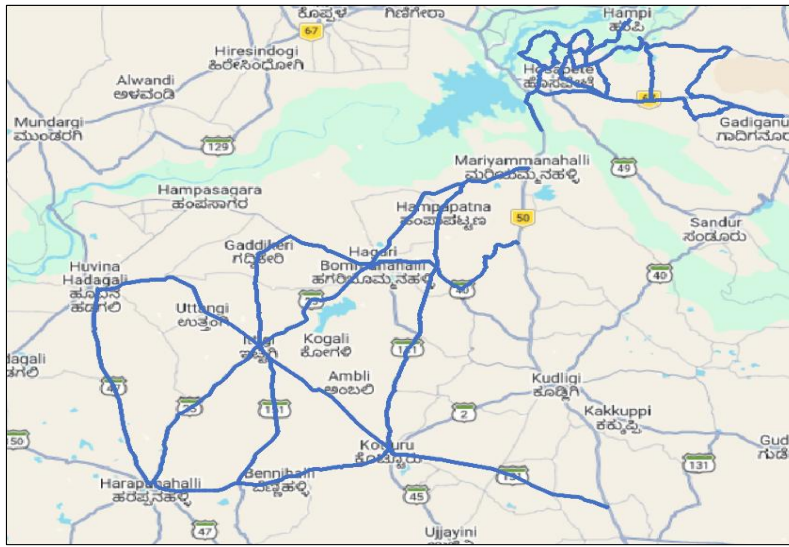


Figure- 6: Drive test routes.

4.2.2 Areas covered

Hampi, Kamalapura, Hosapete, Anekal, Mariyammanahalli, Chilakanahatti, Hampapatna, Hagaribommanahalli, Dharmasagara, Holagundi, Kotturu, Banavikallu, Gaddikeri, Alabur, Chigateri, Ittigi, Harapanahalli, and Haregondanahalli etc.

4.2.3 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	455	655	454
Call Setup Success Rate %	99.12	49.47	99.12
Drop Call Rate %	0.22	6.17	1.11
Call Setup Time-Average (Second)	4.15	2.62	4.12
Handover Success Rate %	99.14	99.64	97.32

Table-13: Summary of voice call performance in 3G/2G network mode only.

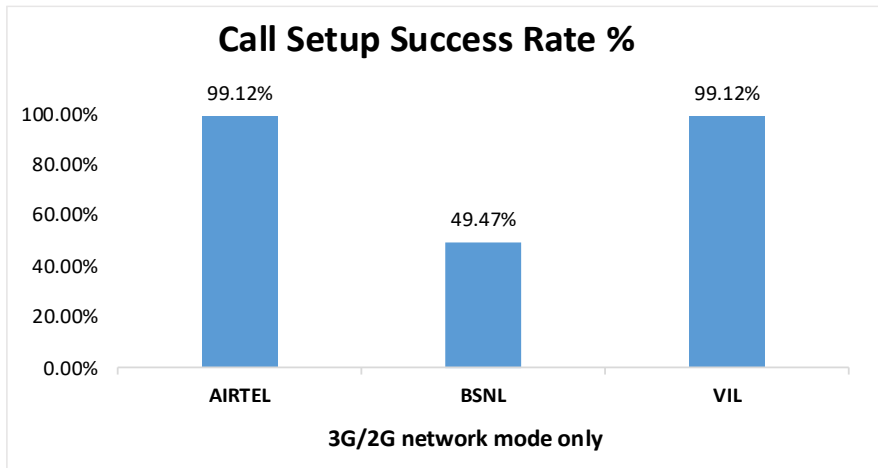


Figure-7: Performance for call setup success rate.

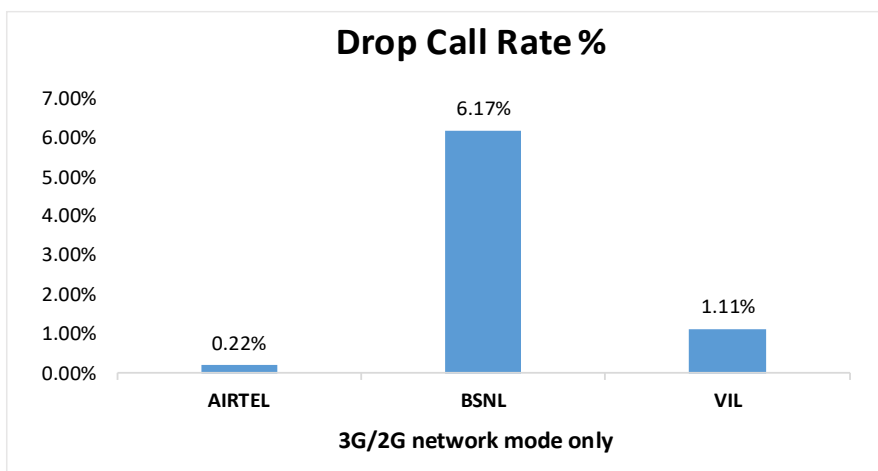


Figure-8: Performance for drop call rate.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	66.87%	NA
2G	100.00%	21.74%	99.99%
Limited Service	0.00%	11.38%	0.01%

Table-14: Time spent on technology during drive test 3G/2G network mode.

Note-

- NA- Service provider doesn't provide services in respective technology.

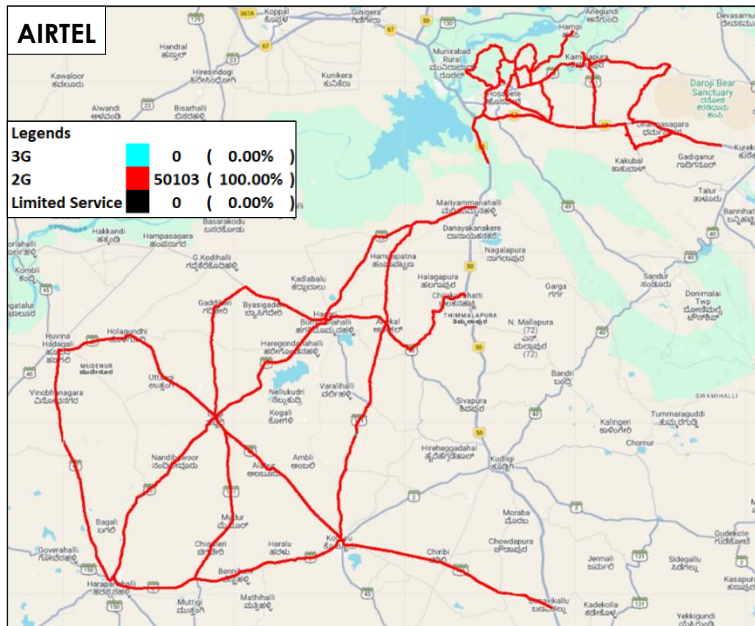


Figure-9: Serving technology plots 3G/2G network mode - AIRTEL.

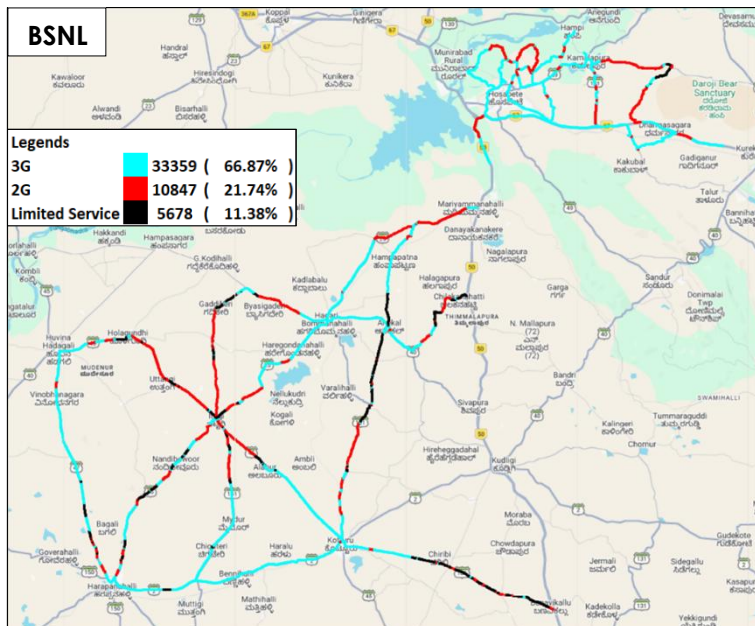


Figure-10: Serving technology plots 3G/2G network mode - BSNL.

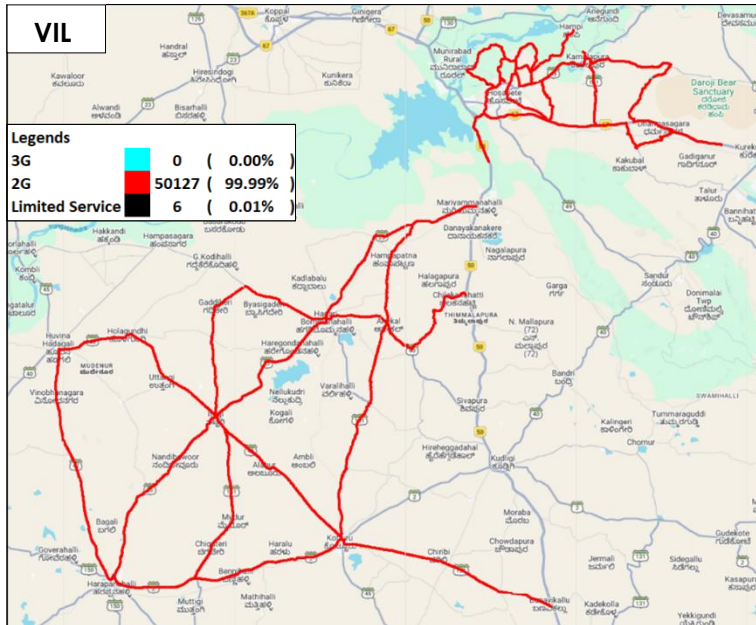


Figure-11: Serving technology plots 3G/2G network mode - VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 87, 88 & 89 for map view)

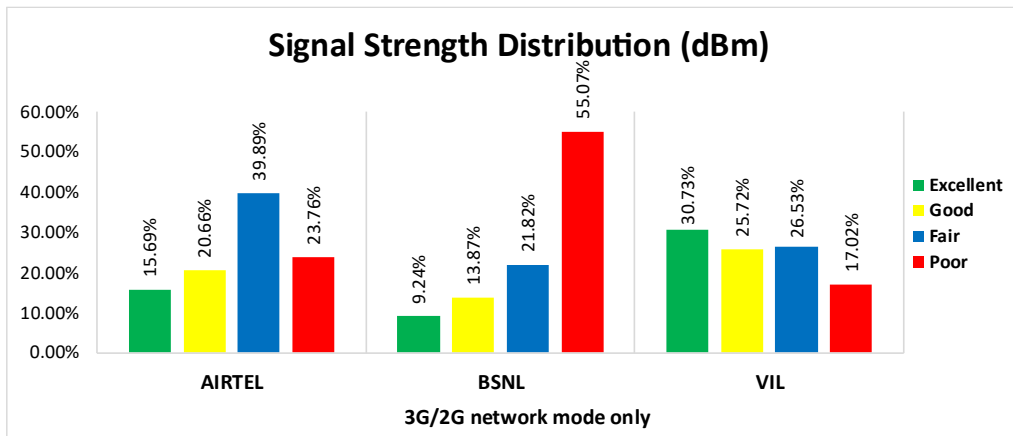


Figure-12: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 16% of samples falling in the excellent signal strength category.
- BSNL has 9% of samples falling in the excellent signal strength category.
- VIL has 31% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	479	545	478	481
Call Setup Success Rate %	98.33	77.98	100.00	97.09
Drop Call Rate %	0.21	8.71	0.42	1.71
Call Setup Time Average (Second)	0.41	1.65	0.75	1.39
Handover Success Rate %	99.83	99.92	99.67	99.83

Table-15: Summary of voice call performance in network auto-selection mode.

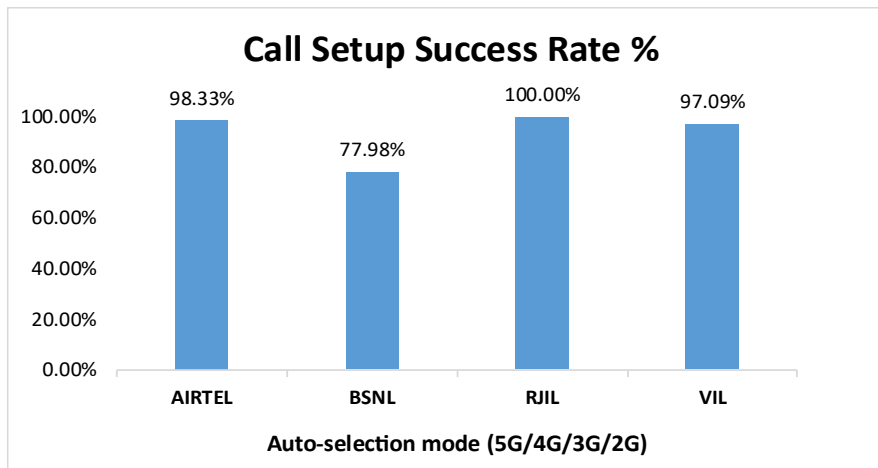


Figure-13: Performance for call setup success rate.

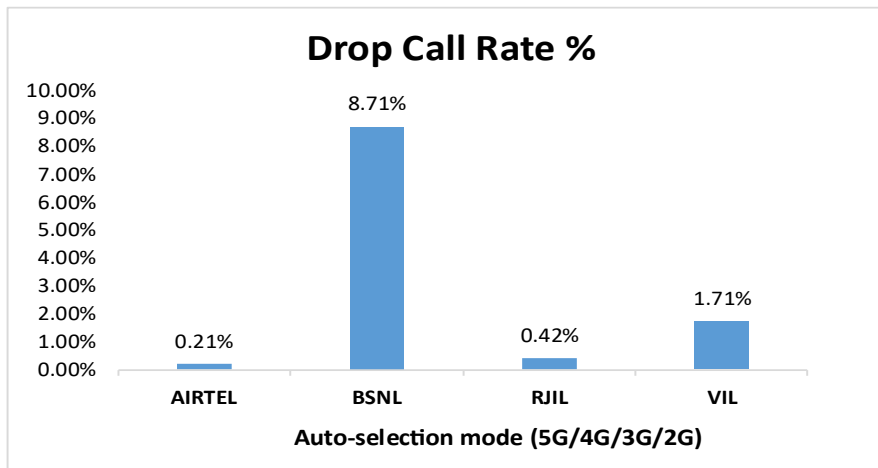


Figure-14: Performance for drop call rate.



Figure-15: Drop call location in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

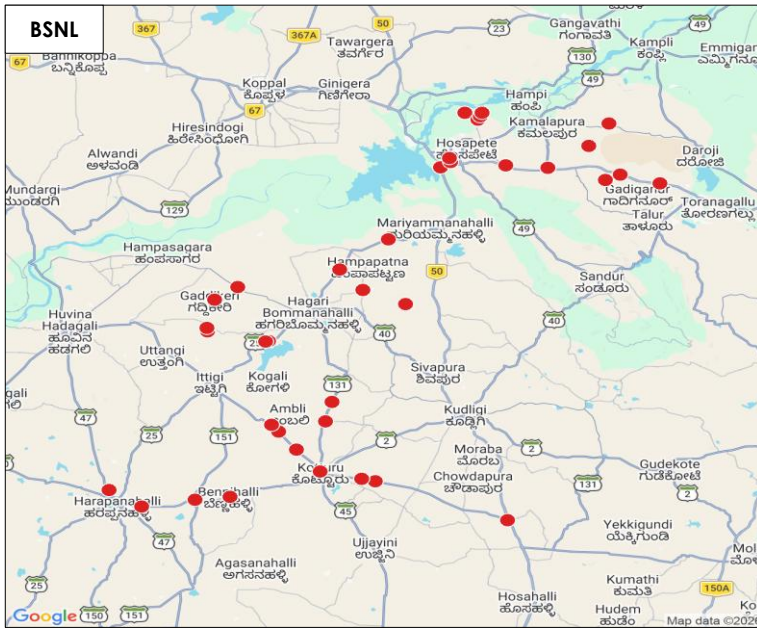


Figure-16: Drop call location in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

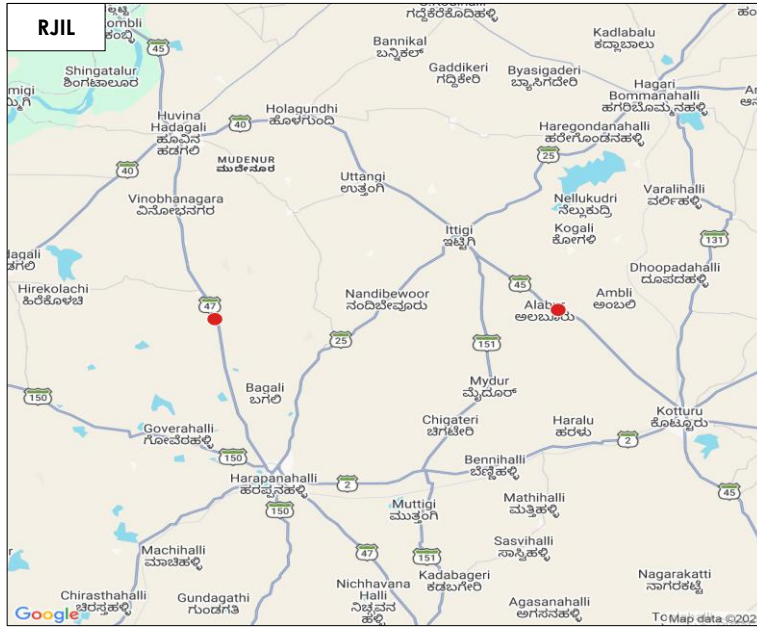


Figure-17: Drop call location in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

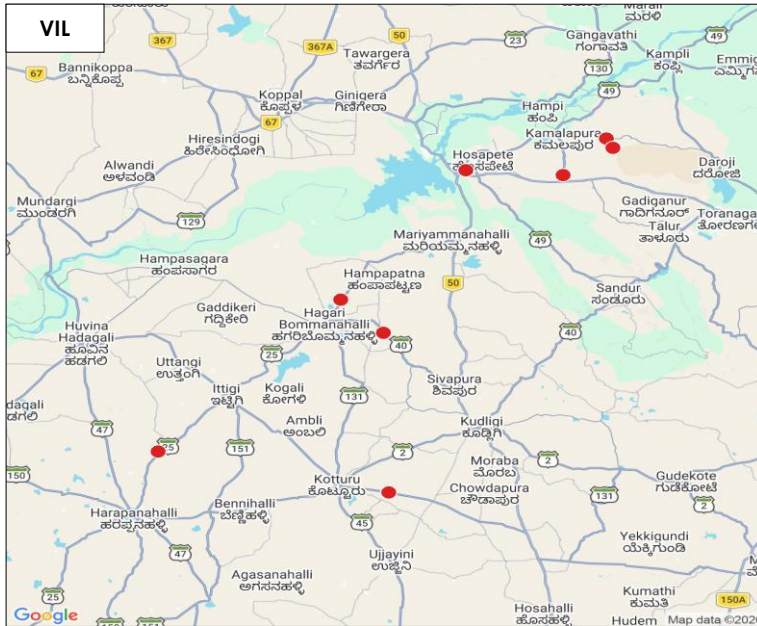


Figure-18: Drop call location in auto-selection mode (5G/4G/3G/2G) voice - VIL.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G – Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	533	367	459	453
Number of silences call for >4 Sec	10	21	5	35
Silence Call Rate %	1.88	5.72	1.09	7.73
Number of silence instances for >4 Sec	13	28	6	46
Number of silence instances for >3 Sec	20	45	12	100
Number of silence instances for >2 sec	39	63	24	138
RTP Jitter (4G & 5G) in ms	3.87	5.89	11.43	14.24
Packet loss Rate Downlink %	1.22	5.16	1.50	2.67
Packet loss Rate Uplink %	0.83	4.19	0.66	2.40

Table-16: Summary of silence instances & packet loss rate for mobile to mobile call.

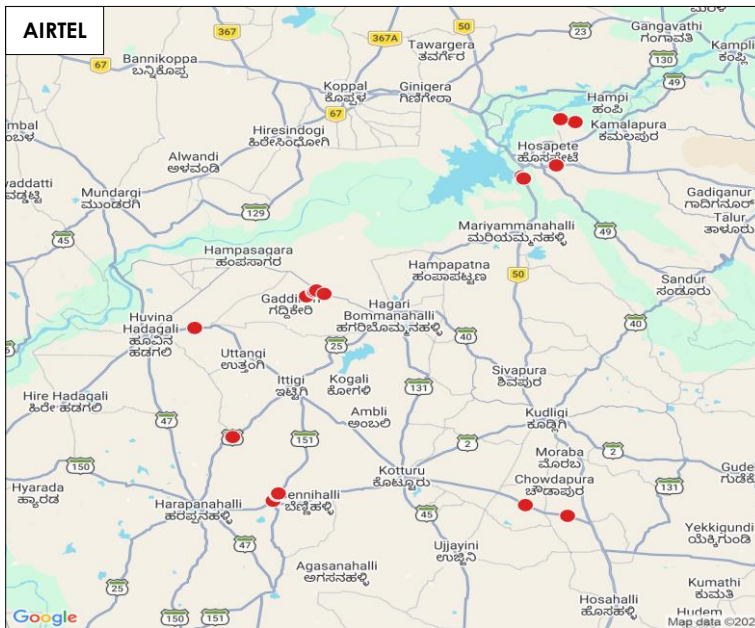


Figure-19: Number of silence instances for >3 Sec Mobile-to-Mobile (5G/4G-Open Mode) - AIRTEL.

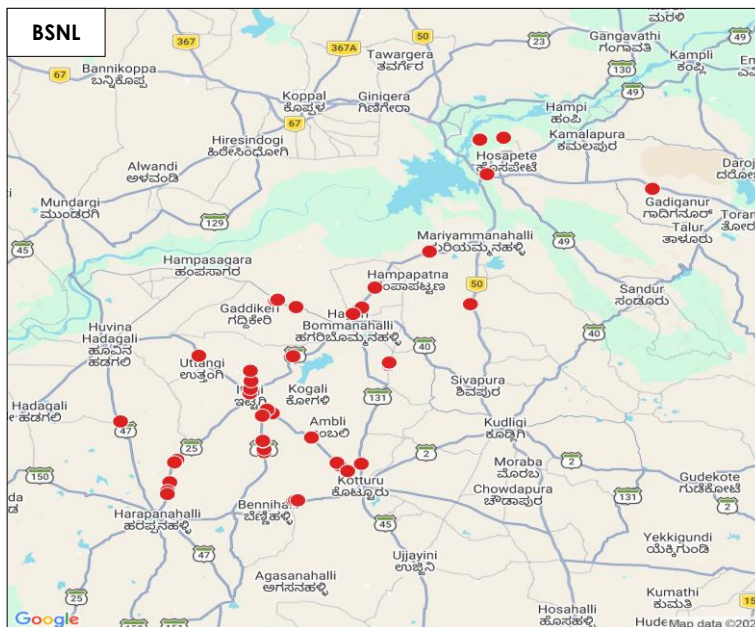


Figure-20: Number of silence instances for >3 Sec Mobile-to-Mobile (5G/4G-Open Mode) - BSNL.

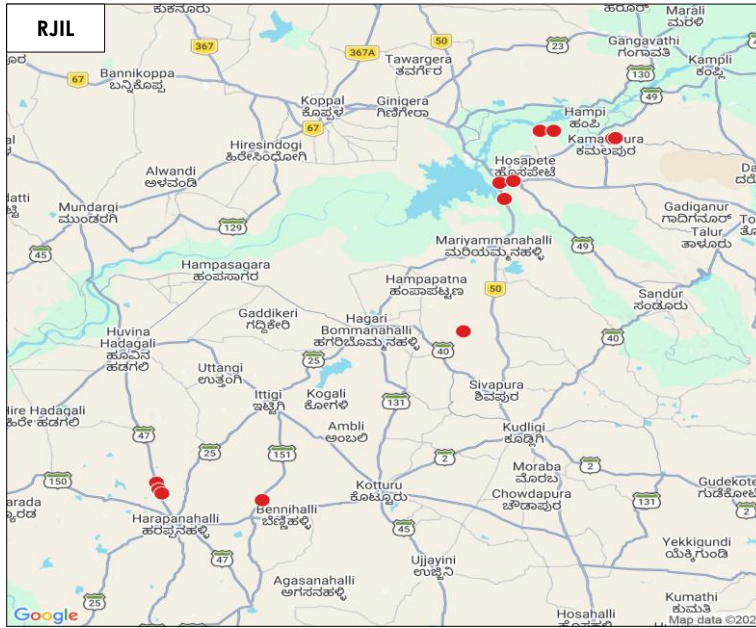


Figure-21: Number of silence instances for >3 Sec Mobile-to-Mobile (5G/4G-Open Mode) - RJIL.

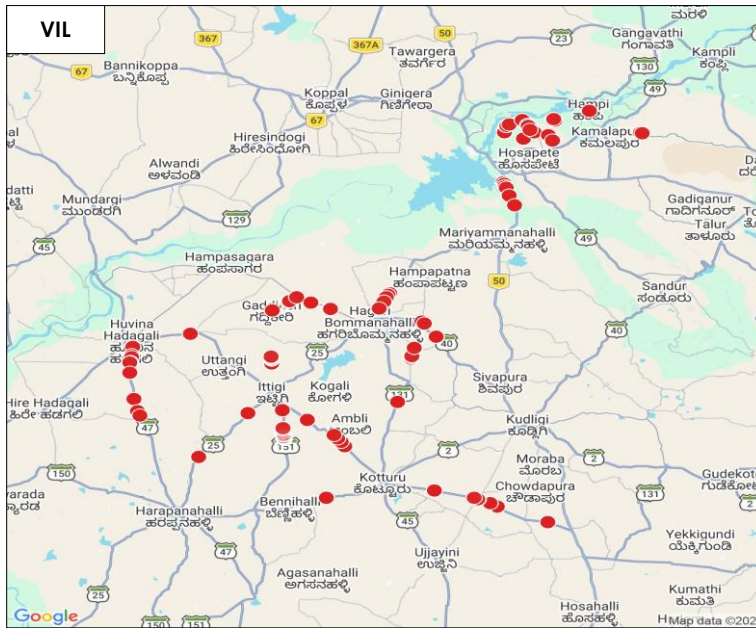


Figure-22: Number of silence instances for >3 Sec Mobile-to-Mobile (5G/4G-Open Mode) - VIL.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS value means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-16	2520	1984	2675	2560
Speech Quality (Average MOS)	3.87	3.32	4.39	3.75
Number of samples with MOS ≥ 4 to < 5 (Excellent)	1635	994	2278	1529
Number of samples with MOS ≥ 3 to < 4 (Good)	725	210	220	756
Number of samples with MOS ≥ 2 to < 3 (Fair)	101	481	71	116
Number of samples with MOS ≥ 1 to < 2 (Poor)	59	299	106	159
%age of samples with MOS ≥ 4 to < 5 (Excellent)	64.88%	50.10%	85.16%	59.73%
%age of samples with MOS ≥ 3 to < 4 (Good)	28.77%	10.58%	8.22%	29.53%
%age of samples with MOS ≥ 2 to < 3 (Fair)	4.01%	24.24%	2.65%	4.53%
%age of samples with MOS ≥ 1 to < 2 (Poor)	2.34%	15.07%	3.96%	6.21%

Table-17: Summary of speech quality (MOS) samples.

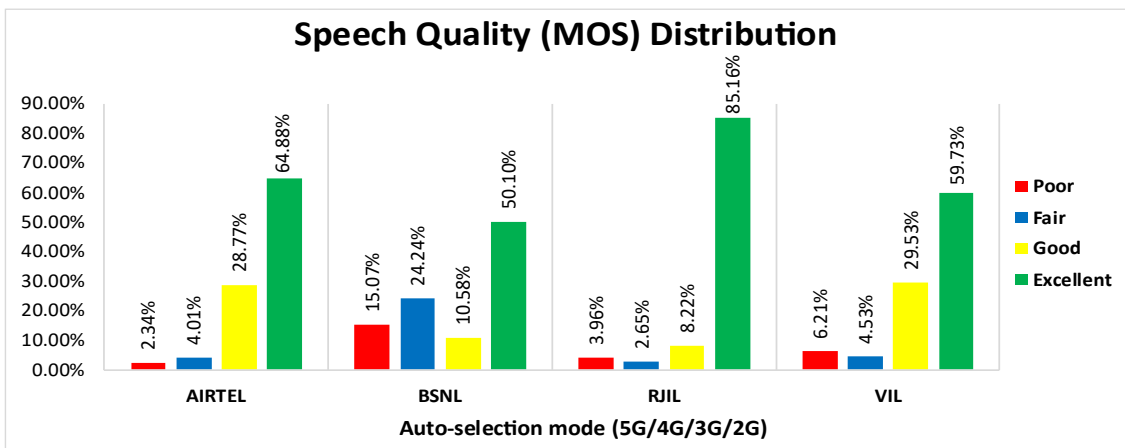


Figure-23: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	1.82%	NA	50.63%	NA
4G	97.88%	67.60%	49.37%	89.80%
3G	NA	19.51%	NA	NA
2G	0.03%	9.17%	NA	9.83%
Limited Service	0.28%	3.71%	0.00%	0.37%

Table-18: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice.

Note-

- NA- Service provider doesn't provide services in respective technology.

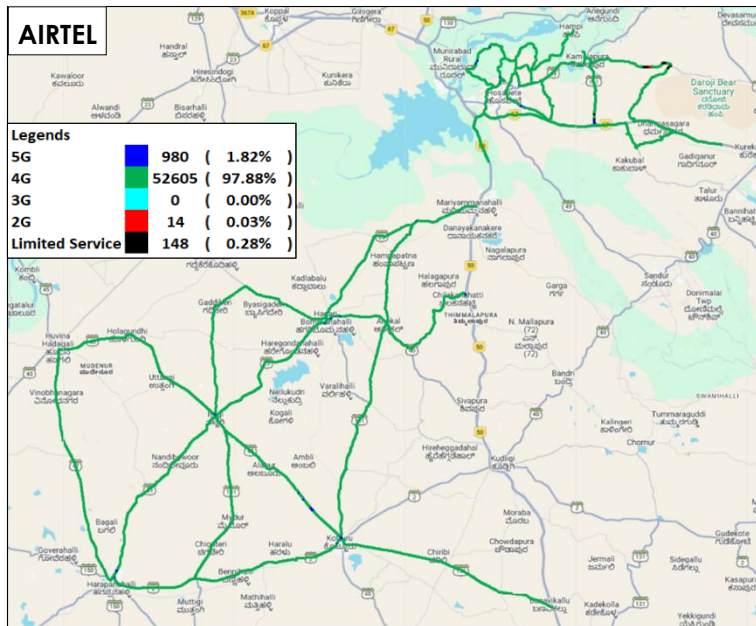


Figure-24: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

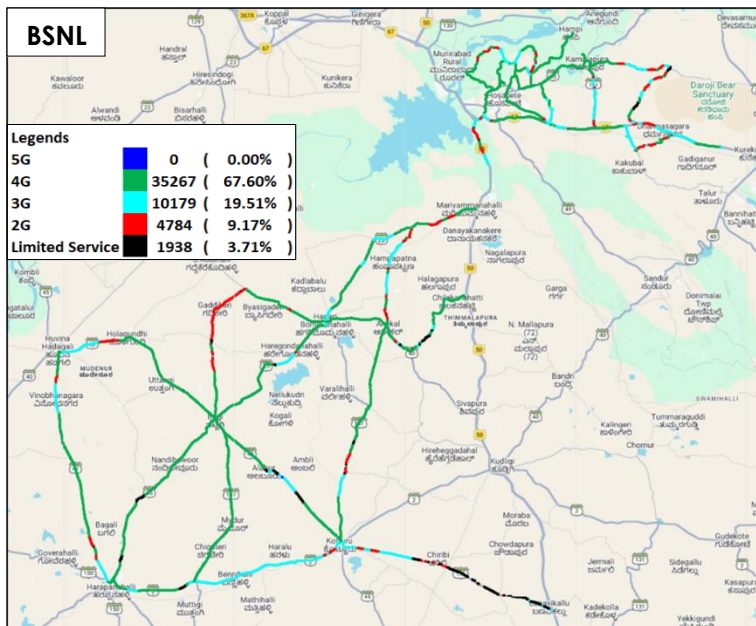


Figure-25: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

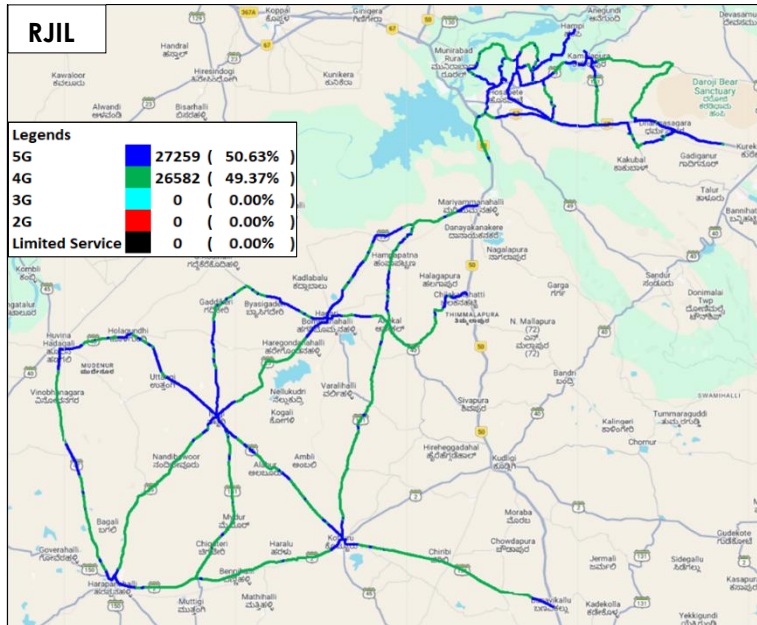


Figure-26: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

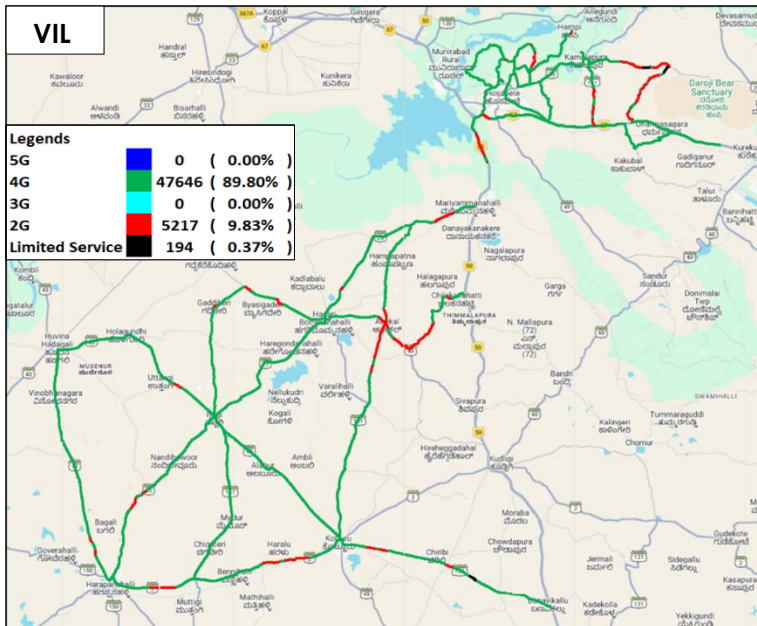


Figure-27: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - VIL.

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) voice. (Refer figure-90, 91, 92 & 93 for map view)

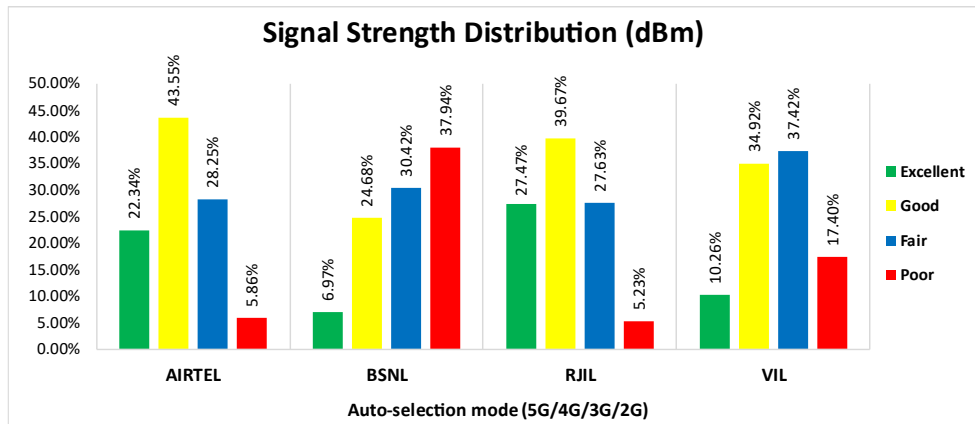


Figure-28: Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

Observations:

- Airtel has 22% of samples falling in the excellent signal strength category.
- BSNL has 7% of samples falling in the excellent signal strength category.
- RJIL has 27% of samples falling in the excellent signal strength category.
- VIL has 10% of samples falling in the excellent signal strength category.

(h) Coverage Gap observed

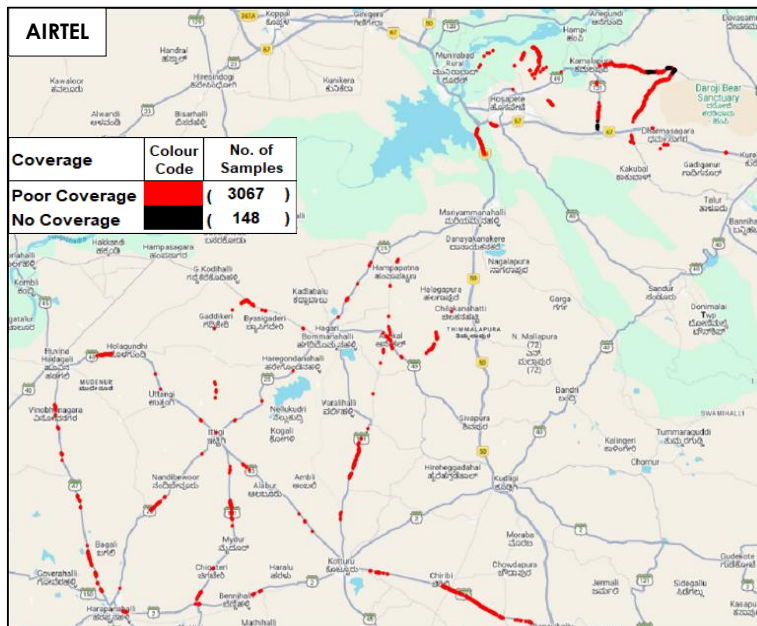


Figure-29: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

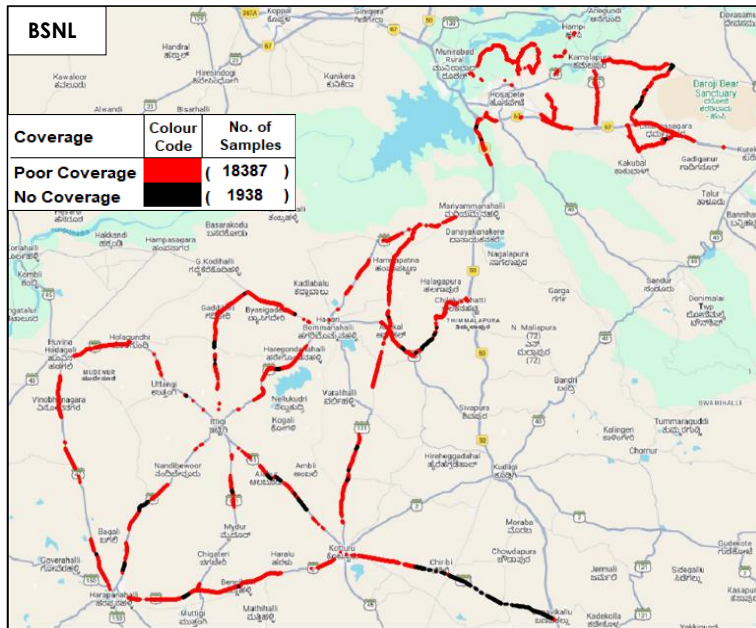


Figure-30: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

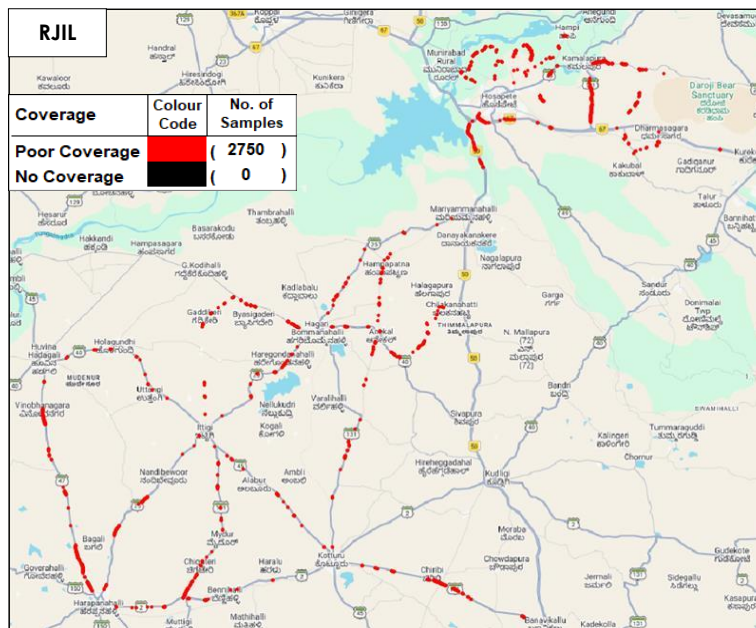


Figure-31: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

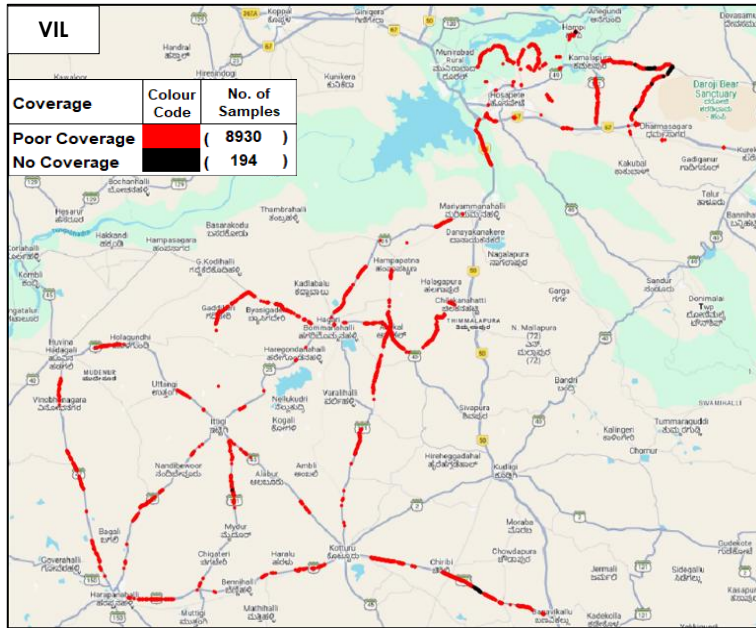


Figure-32: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice - VIL.

4.2.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	87.50	10.47	151.30	22.09
	80 th Percentile	125.99	16.40	300.37	33.74
	20 th Percentile	22.43	3.18	9.12	3.30
Upload Throughput (Mbits/s)	Average	20.69	5.41	14.00	10.77
	80 th Percentile	32.10	9.31	24.05	18.17
	20 th Percentile	4.48	1.23	1.63	1.87
Latency (ms)	50 th Percentile	27.15	59.89	28.66	40.78

Table-19: Summary of Data performance in network auto-selection mode.

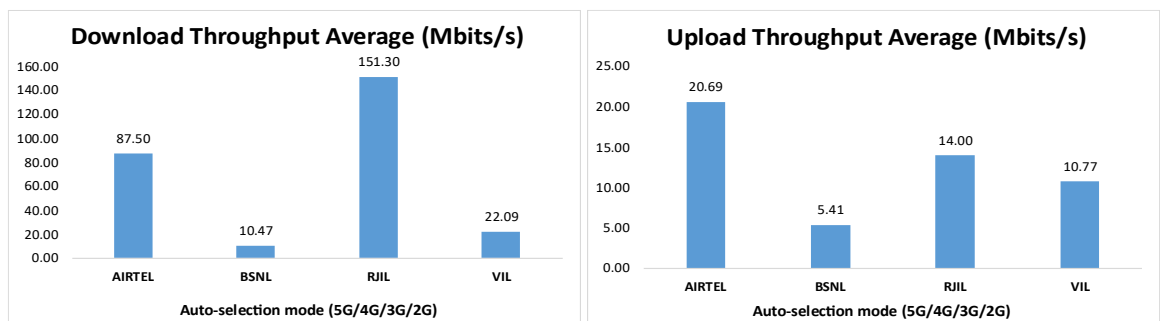


Figure- 33: Download & Upload throughput.

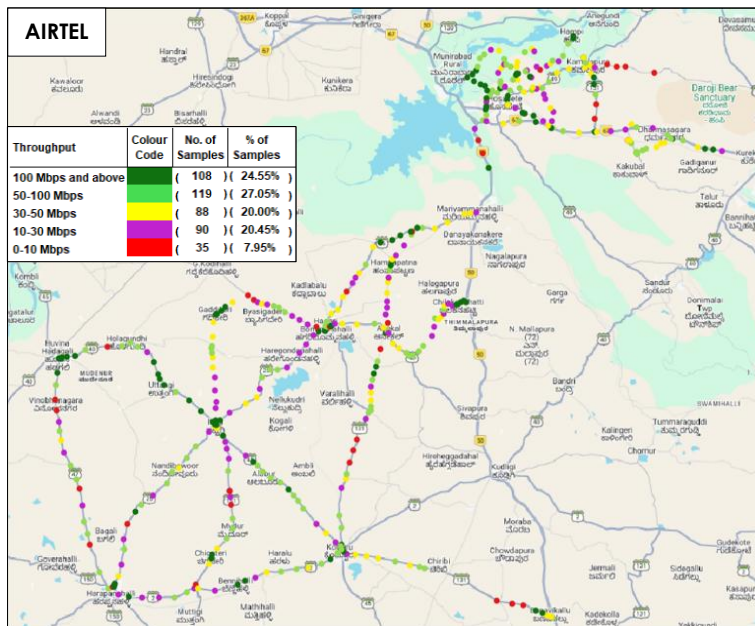


Figure-34: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - AIRTEL.

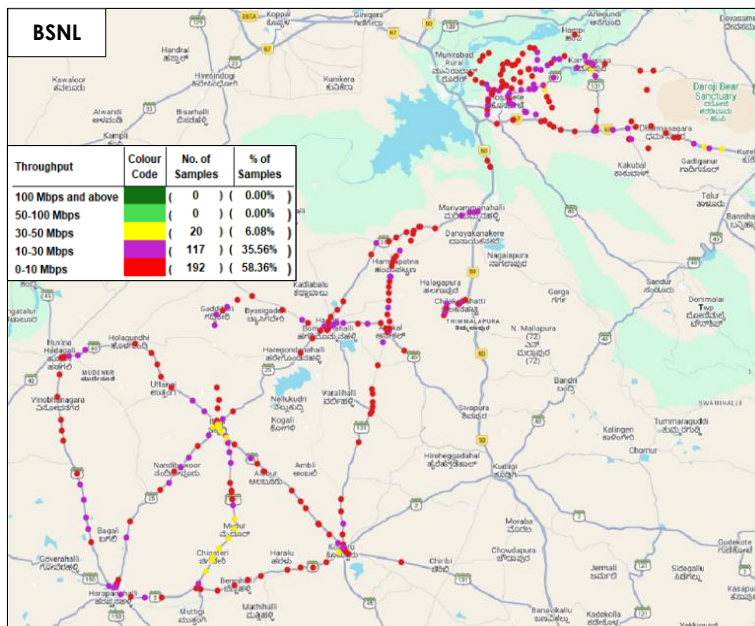


Figure-35: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - BSNL.

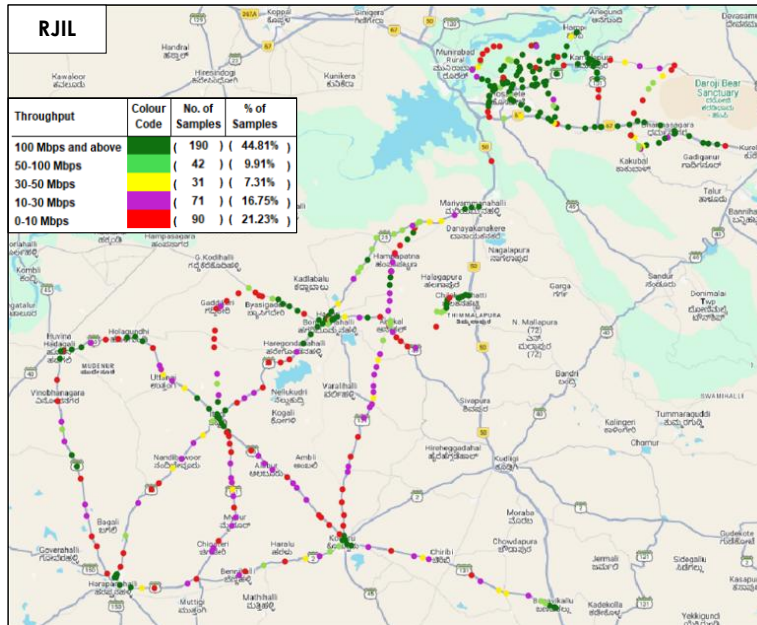


Figure-36: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - RJIL.

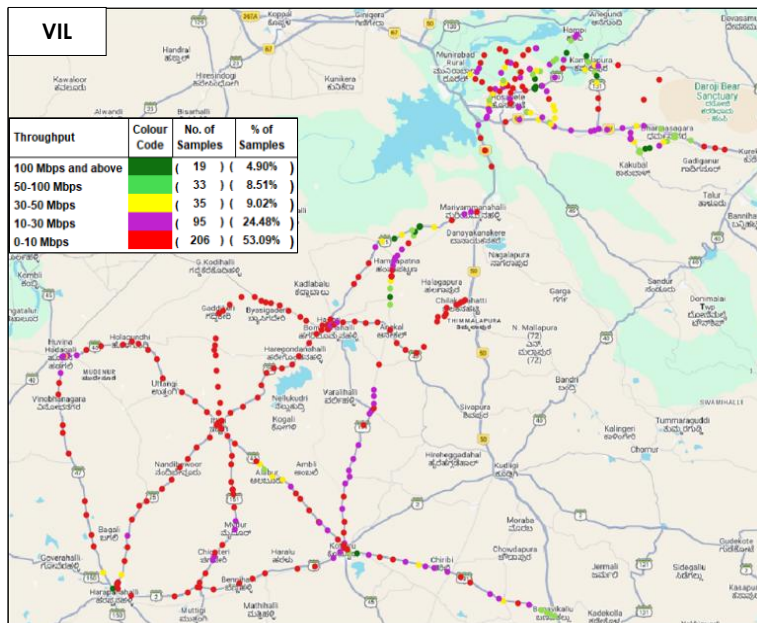


Figure-37: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - VIL.

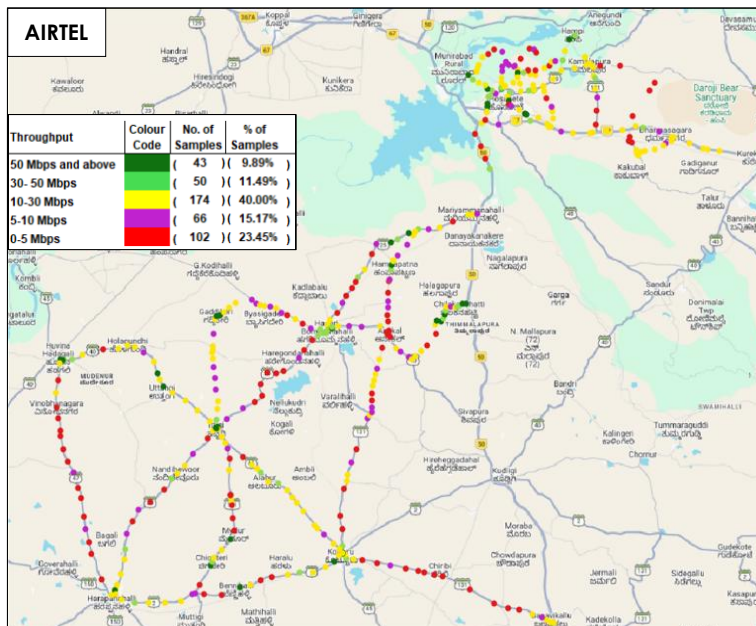


Figure-38: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) - AIRTEL.

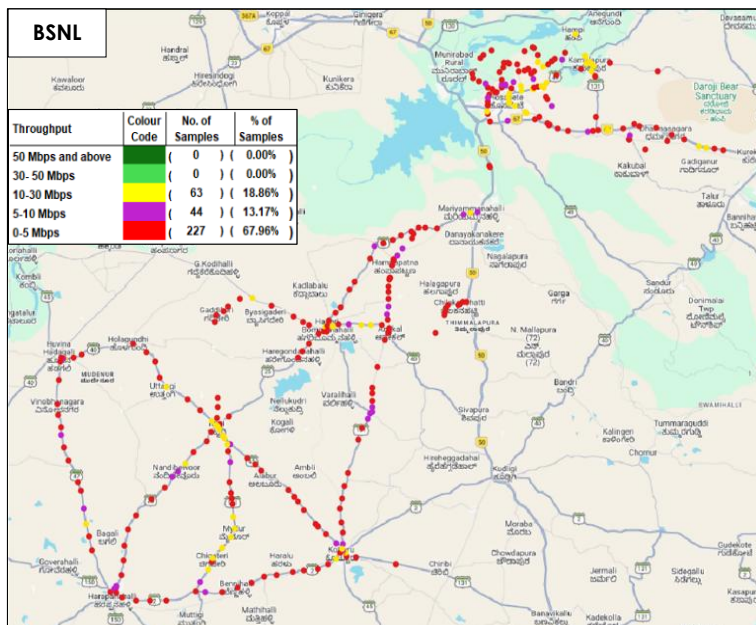


Figure-39: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) - BSNL.

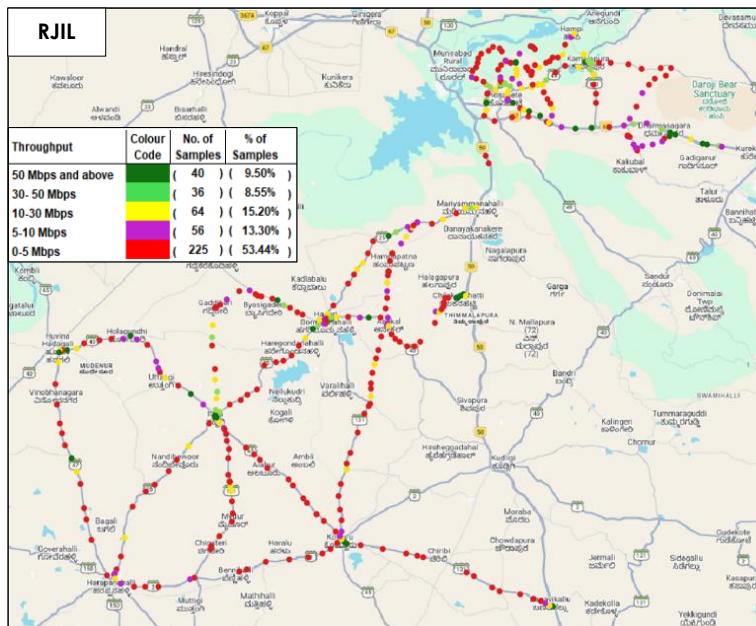


Figure-40: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) - RJIL.

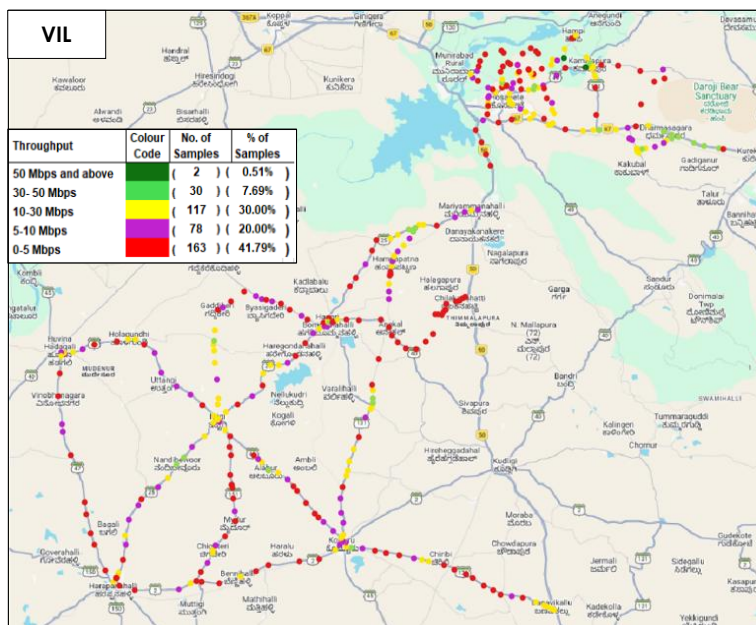


Figure-41: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) - VIL.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	23.64%	NA	59.25%	NA
4G	75.71%	80.61%	40.63%	92.07%
3G	NA	11.99%	NA	NA
2G	0.35%	1.01%	NA	7.27%
Limited Service	0.30%	6.39%	0.12%	0.66%

Table-20: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

Note-

- NA- Service provider doesn't provide services in respective technology.

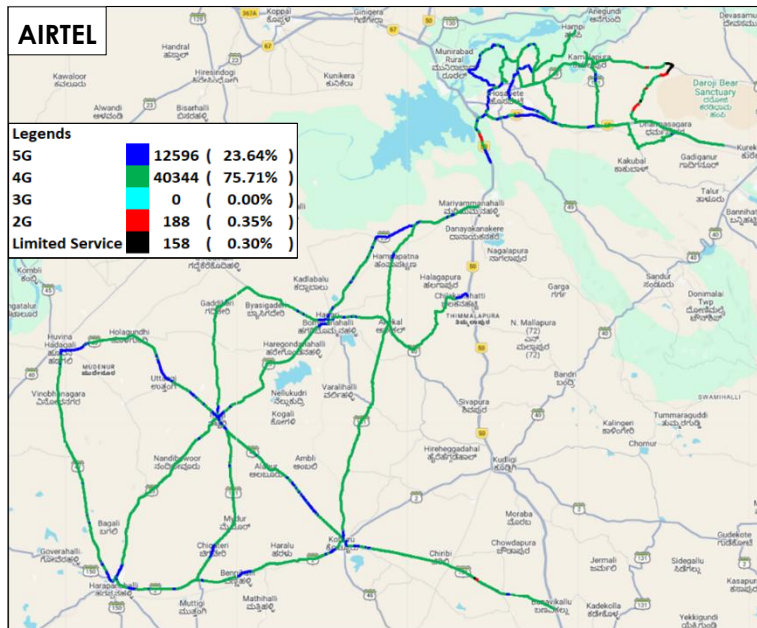


Figure-42: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

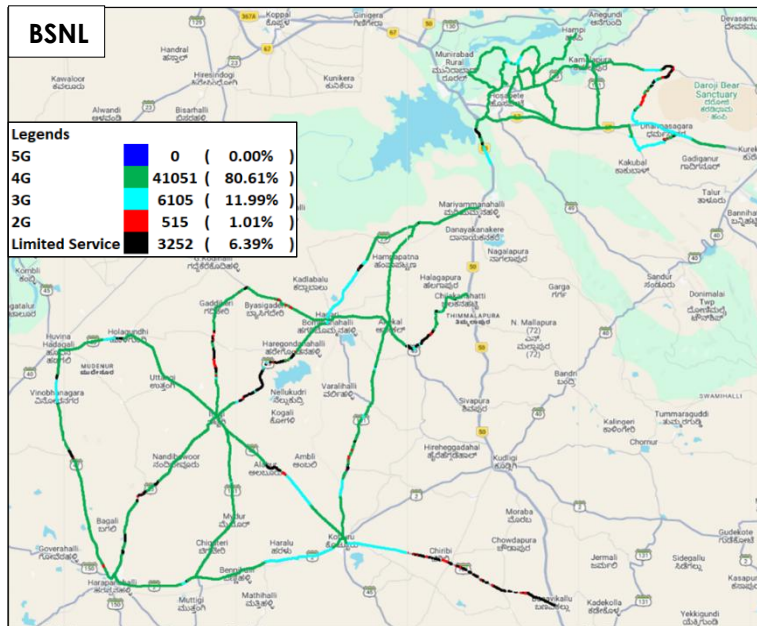


Figure-43: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - BSNL.

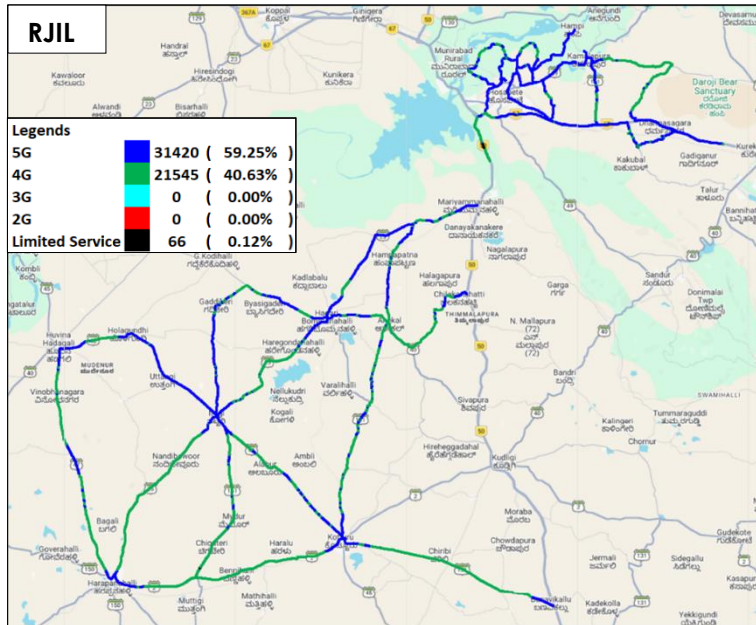


Figure-44: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - RJIL.

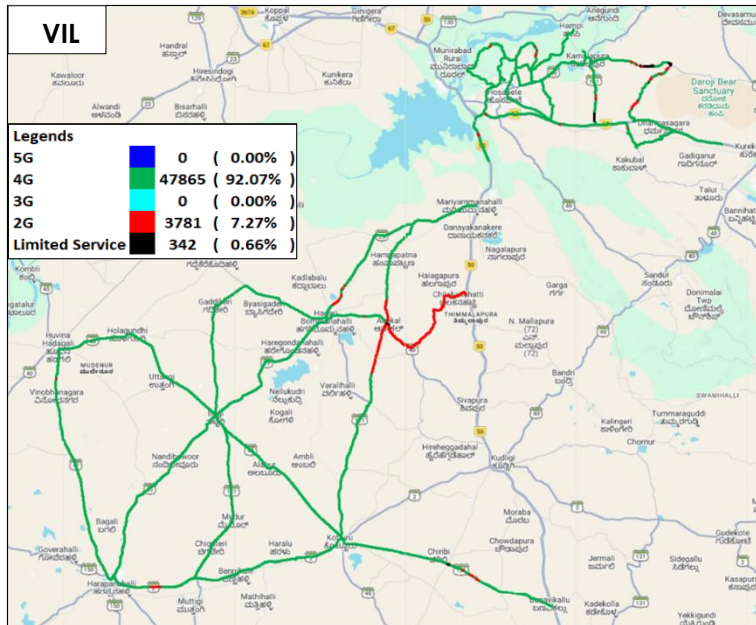


Figure-45: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - VIL.

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-94, 95, 96 & 97 for map view)

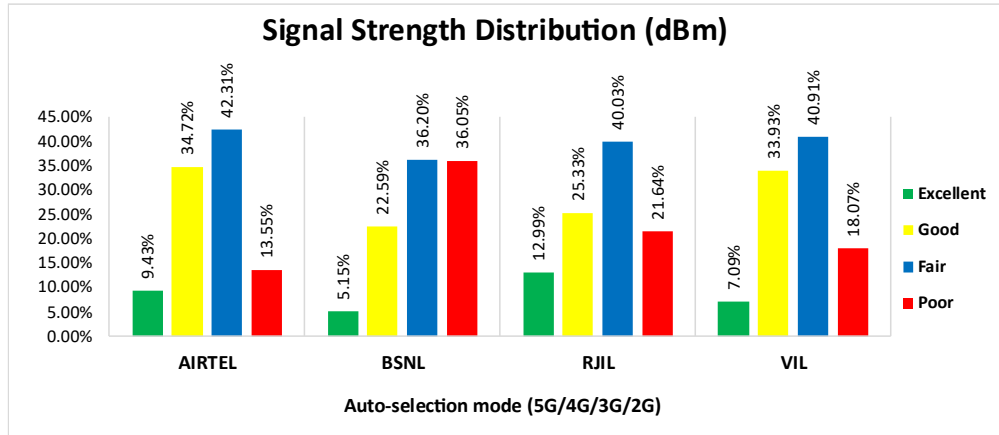


Figure-46: Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

Observations:

- Airtel has 9% of samples falling in the excellent signal strength category.
- BSNL has 5% of samples falling in the excellent signal strength category.
- RJIL has 13% of samples falling in the excellent signal strength category.
- VIL has 7% of samples falling in the excellent signal strength category.

4.3 Hotspots

Hotspot testing has been done on 11th August 2026 & 14th August 2026. Thirteen locations have been tested in the Vijayanagara District. (Refer Table-1)

4.3.1 Locations

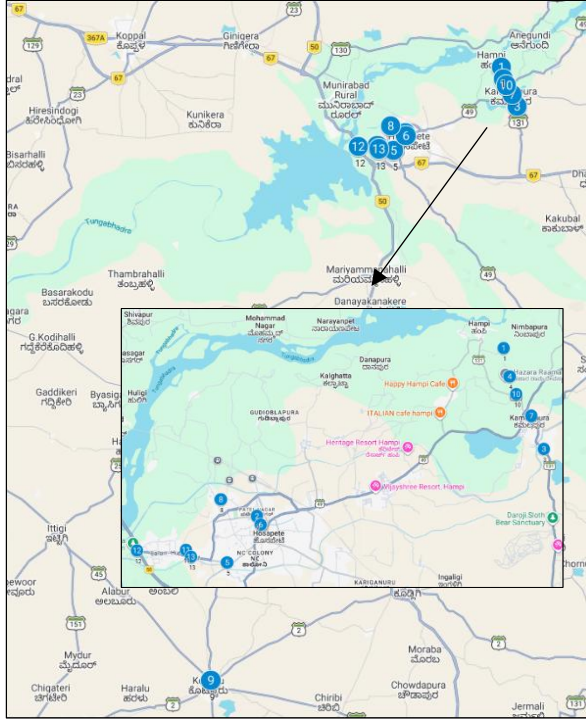


Figure- 47: Hotspot locations.

4.3.2 Hotspot covered

1. Achyutaraya Temple Complex Hampi
2. District Court Complex Hosapete
3. Government CHC Kamlapura
4. Hampi Utsav Grounds and Tourist Parking Area
5. Hosapete APMC Yard
6. Hosapete City Municipal Council Office
7. Kamalapura Archaeological Museum (ASI Museum)
8. Karnataka One Centre Hosapete
9. Kotturu Bus Stand
10. Queen's Bath Hampi
11. Superintendent Of Police Office Hosapete
12. Tungabhadra Dam Entrance & Garden
13. Vijayanagara Deputy Commissioner Office Hosapete

4.3.3 Voice performance

Overall Voice Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	130	130	130	130
Call Setup Success Rate %	100.00	99.23	100.00	100.00
Drop Call Rate %	0.00	0.00	0.77	0.00
Call Setup Time-Average (Second)	0.33	1.05	0.53	1.02

Table-21: Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Achyutaraya Temple Complex Hampi				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.36	0.67	0.51	3.90

Table-22: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

District Court Complex Hosapete				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.28	0.62	0.41	0.77

Table-23: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

Government CHC Kamlapura				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.32	0.73	0.50	0.79

Table-24: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

Hampi Utsav Grounds and Tourist Parking Area				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.30	0.73	0.54	0.79

Table-25: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

Hosapete APMC Yard				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.27	0.69	0.43	0.72

Table-26: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

Hosapete City Municipal Council Office				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.31	0.72	0.43	1.06

Table-27: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

Kamalapura Archaeological Museum (ASI Museum)				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.28	0.70	0.43	0.72

Table-28: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

Karnataka One Centre Hosapete				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	90.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.30	5.94	0.43	0.71

Table-29: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

Kotturu Bus Stand				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.30	0.71	0.45	0.72

Table-30: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

Queen's Bath Hampi				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.35	0.73	0.50	0.78

Table-31: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

Superintendent Of Police Office Hosapete				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.30	0.65	0.43	0.75

Table-32: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

Tungabhadra Dam Entrance & Garden				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	10.00	0.00
Call Setup Time-Average (Second)	0.56	0.65	1.36	0.82

Table-33: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

Vijayanagara Deputy Commissioner Office Hosapete				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.31	0.68	0.49	0.71

Table-34: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G).

4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	116.18	7.70	289.73	23.93
Download Throughput 80 th Percentile (Mbit/s)	181.41	12.87	461.93	32.65
Download Throughput 20 th Percentile (Mbit/s)	17.68	2.86	107.23	3.93
Download Session Setup Success Rate %	100.00	100.00	93.85	98.46
Upload Throughput Average (Mbits/s)	24.62	4.06	29.88	13.10
Upload Throughput 80 th Percentile (Mbit/s)	50.30	7.47	59.64	23.34
Upload Throughput 20 th Percentile (Mbit/s)	3.05	1.23	4.24	3.97
Upload Session Setup Success Rate %	100.00	100.00	93.85	98.46
Web Browsing Delay (Second)	5.04	4.90	2.48	5.30
Youtube Initial Buffer Delay (Second)	2.20	3.51	0.98	1.67
Latency (ms) – 50 th Percentile	28.61	60.63	28.61	32.98
Jitter (ms)	9.06	97.88	6.51	20.77
Packet Loss Rate%	7.31	9.14	8.47	12.66
Packet Loss Rate- 90 th percentile	13.80	14.40	7.90	55.00

Table-35: Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Achyutaraya Temple Complex Hampi				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	28.01	2.56	7.08	1.37
Download Session Setup Success Rate %	100.00	100.00	100.00	80.00
Upload Throughput Average (Mbits/s)	2.80	1.36	5.38	1.44
Upload Session Setup Success Rate %	100.00	100.00	100.00	80.00
Web Browsing Delay (Second)	4.30	4.73	0.69	11.69
Youtube Initial Buffer Delay (Second)	4.08	6.82	1.27	-
Latency (ms) – 50 th Percentile	26.64	68.51	27.79	-
Jitter (ms)	8.04	7.17	3.94	-
Packet Loss Rate%	0.60	2.60	0.00	100.00

Table-36: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube and Ping tests were failed.

District Court Complex Hosapete				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	79.57	4.01	109.44	23.45
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	27.52	5.89	23.23	28.61
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.47	3.21	2.42	6.86
Youtube Initial Buffer Delay (Second)	1.23	4.90	0.94	0.96
Latency (ms) – 50 th Percentile	28.11	58.91	27.71	32.64
Jitter (ms)	5.50	3.07	4.10	35.42
Packet Loss Rate%	1.00	1.50	0.10	0.10

Table-37: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Government CHC Kamlapura				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	96.03	8.34	321.78	30.78
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	4.03	3.74	7.26	8.85
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.89	2.74	2.72	7.06
Youtube Initial Buffer Delay (Second)	2.01	1.69	0.82	0.90
Latency (ms) – 50 th Percentile	25.75	66.31	43.03	33.54
Jitter (ms)	7.89	3.07	5.76	15.25
Packet Loss Rate%	0.20	0.40	0.40	0.50

Table-38: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Hampi Utsav Grounds and Tourist Parking Area				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	20.34	18.52	57.96	8.32
Download Session Setup Success Rate %	100.00	100.00	60.00	100.00
Upload Throughput Average (Mbits/s)	2.19	2.64	1.69	2.84
Upload Session Setup Success Rate %	100.00	100.00	60.00	100.00
Web Browsing Delay (Second)	5.24	5.32	2.11	2.54
Youtube Initial Buffer Delay (Second)	6.19	1.82	-	1.36
Latency (ms) – 50 th Percentile	31.06	71.14	44.85	500.11
Jitter (ms)	28.15	199.66	14.48	55.42
Packet Loss Rate%	0.90	59.60	5.30	55.00

Table-39: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube tests were failed.

Hosapete APMC Yard				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	25.33	3.90	622.11	20.34
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	18.22	3.50	78.99	11.84
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	6.24	3.39	1.98	5.27
Youtube Initial Buffer Delay (Second)	1.01	5.03	0.63	0.86
Latency (ms)- 50 th Percentile	29.04	59.12	19.95	34.16
Jitter (ms)	8.24	2.64	4.84	7.84
Packet Loss Rate%	1.10	0.30	0.00	0.30

Table-40: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Hosapete City Municipal Council Office				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	31.20	3.08	201.33	3.81
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	8.22	3.64	5.11	4.58
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	1.94	3.31	2.49	2.15
Youtube Initial Buffer Delay (Second)	4.56	4.96	0.74	5.08
Latency (ms) – 50 th Percentile	21.64	60.28	39.53	35.31
Jitter (ms)	10.31	3.64	20.72	39.92
Packet Loss Rate%	1.70	0.40	4.80	1.10

Table-41: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Kamalapura Archaeological Museum (ASI Museum)				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	249.30	8.27	359.28	11.82
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	47.43	5.45	46.14	12.88
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.30	2.85	2.52	2.68
Youtube Initial Buffer Delay (Second)	0.91	2.78	0.75	2.57
Latency (ms)- 50 th Percentile	500.03	60.62	42.35	35.57
Jitter (ms)	16.94	2.88	5.38	32.19
Packet Loss Rate%	25.20	0.30	0.10	1.30

Table-42: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Karnataka One Centre Hosapete				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	220.74	4.65	386.23	4.01
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	77.69	1.34	59.50	10.75
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	5.05	5.19	2.11	2.22
Youtube Initial Buffer Delay (Second)	1.62	4.40	0.78	1.02
Latency (ms) – 50 th Percentile	18.13	951.37	24.25	30.28
Jitter (ms)	9.07	8509.62	4.88	4.66
Packet Loss Rate%	0.30	50.40	0.10	2.50

Table-43: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Kotturu Bus Stand				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	510.27	8.32	166.65	8.72
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	108.41	7.22	38.36	11.32
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.02	5.38	2.54	5.84
Youtube Initial Buffer Delay (Second)	0.83	1.57	0.91	1.28
Latency (ms) – 50 th Percentile	25.86	59.03	40.27	28.96
Jitter (ms)	4.30	2.28	4.03	11.07
Packet Loss Rate%	0.10	0.20	0.20	0.30

Table-44: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Queen's Bath Hampi				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	43.89	2.58	227.58	63.12
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	9.16	1.14	3.66	15.86
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	6.65	8.52	2.96	5.61
Youtube Initial Buffer Delay (Second)	1.70	6.04	2.55	0.77
Latency (ms) – 50 th Percentile	30.80	64.35	32.97	37.19
Jitter (ms)	4.31	4.11	3.86	19.29
Packet Loss Rate%	50.10	2.40	0.10	0.30

Table-45: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Superintendent Of Police Office Hosapete				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	41.08	16.81	458.25	81.47
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	5.16	5.93	24.33	33.95
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	8.00	7.11	2.23	4.43
Youtube Initial Buffer Delay (Second)	0.93	1.35	0.69	0.93
Latency (ms) – 50 th Percentile	39.87	58.65	23.46	30.37
Jitter (ms)	5.32	2.10	2.56	8.05
Packet Loss Rate%	13.00	0.00	0.00	0.10

Table-46: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Tungabhadra Dam Entrance & Garden				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	90.42	3.69	24.82	20.73
Download Session Setup Success Rate %	100.00	100.00	60.00	100.00
Upload Throughput Average (Mbits/s)	4.01	1.39	1.44	4.53
Upload Session Setup Success Rate %	100.00	100.00	60.00	100.00
Web Browsing Delay (Second)	8.93	5.73	17.14	6.14
Youtube Initial Buffer Delay (Second)	3.08	4.32	-	2.34
Latency (ms) – 50 th Percentile	27.23	59.60	-	32.87
Jitter (ms)	5.12	4.56	-	16.42
Packet Loss Rate%	0.50	0.50	99.00	2.80

Table-47: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- "-" Youtube and Ping tests were failed.

Vijayanagara Deputy Commissioner Office Hosapete				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	74.09	15.34	625.31	28.66
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	5.16	9.53	70.75	20.53
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	3.62	5.45	2.13	6.86
Youtube Initial Buffer Delay (Second)	0.81	1.41	0.66	1.89
Latency (ms) – 50 th Percentile	32.27	57.02	19.10	25.74
Jitter (ms)	4.50	3.28	3.60	3.53
Packet Loss Rate%	0.30	0.20	0.00	0.30

Table-48: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)

Overall Data Performance					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	253.19	-	259.16	-
	Upload Throughput Average (Mbits/s)	64.44	-	23.14	-
4G	Download Throughput Average (Mbits/s)	38.85	5.48	34.59	31.78
	Upload Throughput Average (Mbits/s)	10.72	4.88	8.39	15.64

Table-49: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Achyutaraya Temple Complex Hampi					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	5.54	-
	Upload Throughput Average (Mbits/s)	-	-	3.02	-
4G	Download Throughput Average (Mbits/s)	20.73	2.09	5.69	1.22
	Upload Throughput Average (Mbits/s)	2.09	1.26	1.35	1.27

Table-50: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
District Court Complex Hosapete					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	221.76	-	160.91	-
	Upload Throughput Average (Mbits/s)	57.25	-	12.21	-
4G	Download Throughput Average (Mbits/s)	8.36	3.76	46.59	24.75
	Upload Throughput Average (Mbits/s)	9.61	8.91	11.77	27.92

Table-51: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Government CHC Kamlapura					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	216.27	-	328.46	-
	Upload Throughput Average (Mbits/s)	26.89	-	9.41	-
4G	Download Throughput Average (Mbits/s)	57.52	5.48	44.16	64.12
	Upload Throughput Average (Mbits/s)	14.84	1.37	4.65	10.51

Table-52: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Hampi Utsav Grounds and Tourist Parking Area					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	23.99	-
	Upload Throughput Average (Mbits/s)	-	-	2.79	-
4G	Download Throughput Average (Mbits/s)	24.53	4.27	22.90	19.28
	Upload Throughput Average (Mbits/s)	4.73	2.00	1.63	4.20

Table-53: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
---	--	--	--	--	--

Hosapete APMC Yard					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	237.40	-	559.94	-
	Upload Throughput Average (Mbits/s)	28.15	-	63.32	-
4G	Download Throughput Average (Mbits/s)	12.39	5.52	68.03	56.97
	Upload Throughput Average (Mbits/s)	11.54	6.39	25.51	28.41

Table-54: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Hosapete City Municipal Council Office					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	74.48	-	75.81	-
	Upload Throughput Average (Mbits/s)	20.23	-	3.30	-
4G	Download Throughput Average (Mbits/s)	24.66	2.49	17.72	3.89
	Upload Throughput Average (Mbits/s)	13.62	4.99	7.04	6.51

Table-55: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Kamalapura Archaeological Museum (ASI Museum)					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	433.66	-	313.62	-
	Upload Throughput Average (Mbits/s)	100.43	-	19.74	-
4G	Download Throughput Average (Mbits/s)	33.11	10.01	52.53	23.35
	Upload Throughput Average (Mbits/s)	15.47	10.34	18.31	23.52

Table-56: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Karnataka One Centre Hosapete					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	115.08	-	395.24	-
	Upload Throughput Average (Mbits/s)	93.88	-	64.93	-
4G	Download Throughput Average (Mbits/s)	41.70	0.02	20.36	4.17
	Upload Throughput Average (Mbits/s)	22.49	1.12	7.87	6.12

Table-57: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
Kotturu Bus Stand					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	461.61	-	275.11	-
	Upload Throughput Average (Mbits/s)	104.49	-	40.62	-
4G	Download Throughput Average (Mbits/s)	119.62	9.22	7.06	18.03
	Upload Throughput Average (Mbits/s)	21.33	10.85	3.84	16.96

Table-58: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.					
---	--	--	--	--	--

Queen's Bath Hampi					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	189.24	-
	Upload Throughput Average (Mbits/s)	14.09	-	4.00	-
4G	Download Throughput Average (Mbits/s)	31.73	2.14	23.58	45.10
	Upload Throughput Average (Mbits/s)	13.64	1.29	2.65	15.22

Table-59: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.					
Superintendent Of Police Office Hosapete					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	474.15	-
	Upload Throughput Average (Mbits/s)	-	-	28.45	-
4G	Download Throughput Average (Mbits/s)	30.70	15.30	35.34	71.61
	Upload Throughput Average (Mbits/s)	3.28	6.06	5.61	30.67

Table-60: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.					
Tungabhadra Dam Entrance & Garden					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	82.60	-	72.18	-
	Upload Throughput Average (Mbits/s)	5.80	-	1.62	-
4G	Download Throughput Average (Mbits/s)	34.35	4.61	36.58	19.85
	Upload Throughput Average (Mbits/s)	2.90	1.89	2.58	1.69

Table-61: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.					
Vijayanagara Deputy Commissioner Office Hosapete					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	-	-	345.31	-
	Upload Throughput Average (Mbits/s)	-	-	30.13	-
4G	Download Throughput Average (Mbits/s)	65.65	4.18	69.19	54.68
	Upload Throughput Average (Mbits/s)	3.86	4.72	16.30	27.41

Table-62: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.					
---	--	--	--	--	--

4.4 Walk Test

Walk Test has been conducted on 11th August 2026 and 12th August 2026. Four locations have been tested in Hosapete & Hampi. (Refer Table-1)

4.4.1 Walk test locations

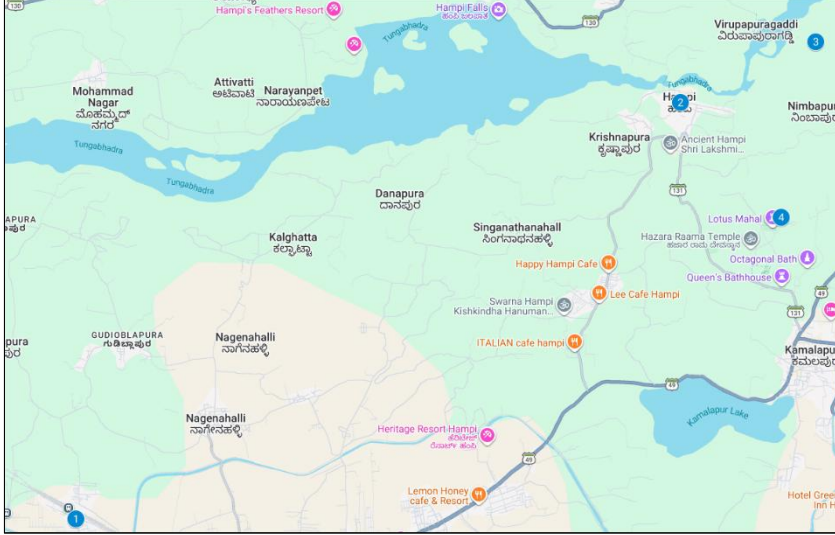


Figure-48: Walk Test locations.

4.4.2 Walk Test Covered

1. Hosapete Junction Railway Station
2. Lotus Mahal - Hampi
3. Vijay Vitthal Temple
4. Virupaksha Temple Complex

4.4.3 Voice Performance

Hosapete Junction Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	18	19	18	18
Call Setup Success Rate %	100.00	94.74	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.55	0.88	0.47	0.76

Table-63: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Lotus Mahal - Hampi				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	14	14	14	14
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.38	0.64	0.61	0.82

Table-64: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Vijay Vitthal Temple				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	23	23	23	32
Call Setup Success Rate %	100.00	95.65	100.00	18.75
Drop Call Rate %	0.00	0.00	0.00	16.67
Call Setup Time-Average (Second)	0.35	2.34	0.56	1.38

Table-65: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Virupaksha Temple Complex				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	18	18	18	17
Call Setup Success Rate %	100.00	100.00	94.44	100.00
Drop Call Rate %	0.00	0.00	5.88	0.00
Call Setup Time-Average (Second)	0.44	0.66	0.83	1.59

Table-66: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

4.4.4 Data Performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Hosapete Junction Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	142.13	3.37	229.14	46.26
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	36.95	3.62	15.44	19.30
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) – 50 th Percentile	22.93	59.05	23.81	30.05

Table-67: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Lotus Mahal - Hampi				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	22.04	10.13	102.52	22.46
Download Session Setup Success Rate %	100.00	92.31	92.31	100.00
Upload Throughput Average (Mbits/s)	4.85	4.09	2.69	4.62
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) – 50 th Percentile	35.04	60.00	30.02	35.45

Table-68: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Vijay Vitthal Temple				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	57.27	6.42	10.30	7.10
Download Session Setup Success Rate %	100.00	86.36	100.00	10.34
Upload Throughput Average (Mbits/s)	11.12	1.35	1.32	1.84
Upload Session Setup Success Rate %	100.00	95.45	100.00	13.79
Latency (ms) – 50 th Percentile	34.42	66.43	38.02	37.19

Table-69: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Virupaksha Temple Complex				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	62.56	3.17	34.88	8.41
Download Session Setup Success Rate %	88.24	100.00	85.71	52.94
Upload Throughput Average (Mbits/s)	12.99	13.00	6.27	2.51
Upload Session Setup Success Rate %	94.12	100.00	85.71	47.06
Latency (ms) – 50 th Percentile	33.00	52.08	42.97	37.51

Table-70: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.5 Highway

Drive test has been conducted on 11th August 2026 covering one Highway route. (Refer Table-1)

4.5.1 Drive test route

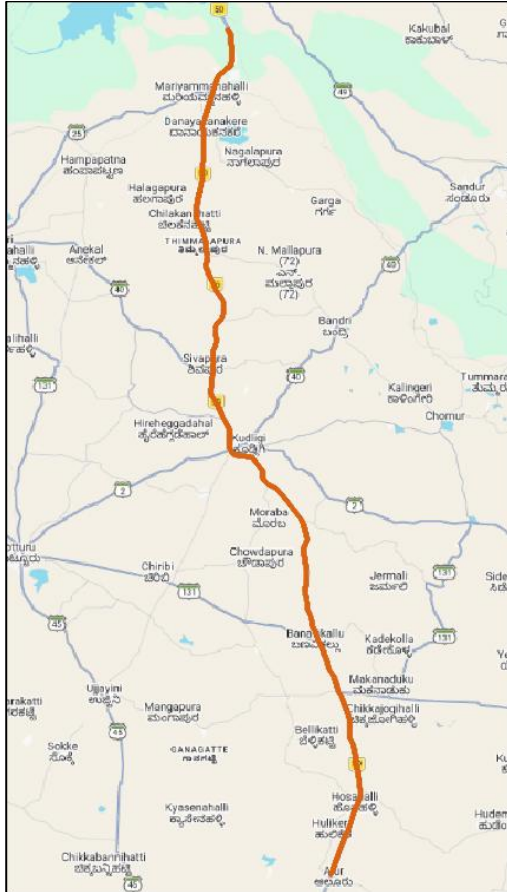


Figure-49: Drive test route Highway.

4.5.2 Routes Covered

Hosapete to Banavikallu passing through Mariyammanahalli, Danayakanakere, Chilakanahatti, Thimplapura, Shivapura, Kudligi and Kakuppi etc.

4.5.3 Voice performance

(a) **Voice Call Performance in 3G/2G network mode only:** 3G/2G network mode testing has been done to reflect the experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	27	51	28
Call Setup Success Rate %	100.00	31.37	100.00
Drop Call Rate %	0.00	6.25	14.29
Call Setup Time-Average (Second)	4.20	2.36	4.10
Handover Success Rate %	100.00	99.09	97.14

Table-71: Summary of voice call performance in 3G/2G network mode only.

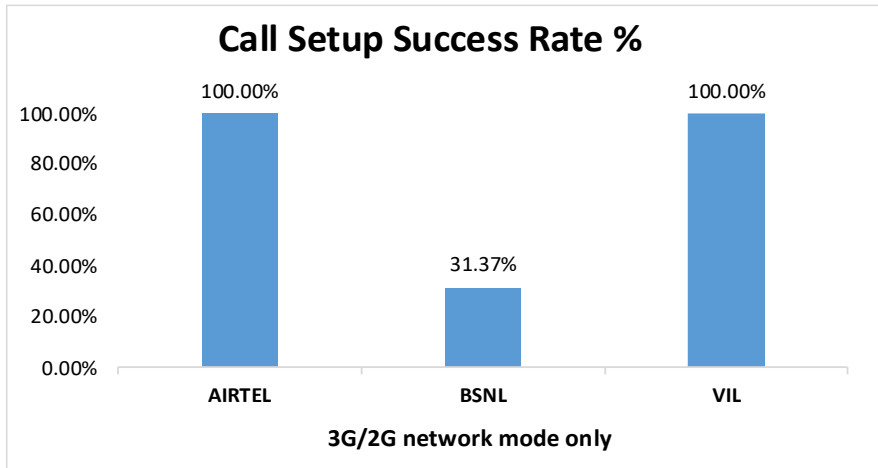


Figure-50: Performance for call setup success rate.

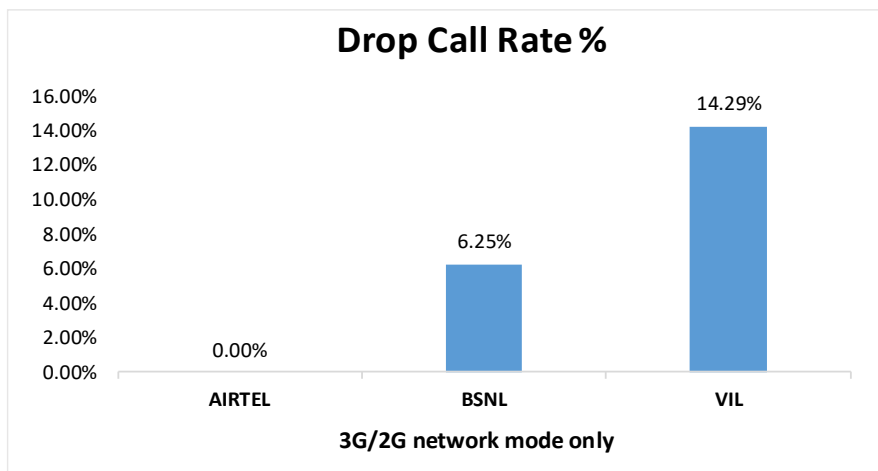


Figure-51: Performance for drop call rate.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	62.65%	NA
2G	100.00%	15.25%	100.00%
Limited Service	0.00%	22.11%	0.00%

Table-72: Time spent on technology during drive test 3G/2G network mode only.

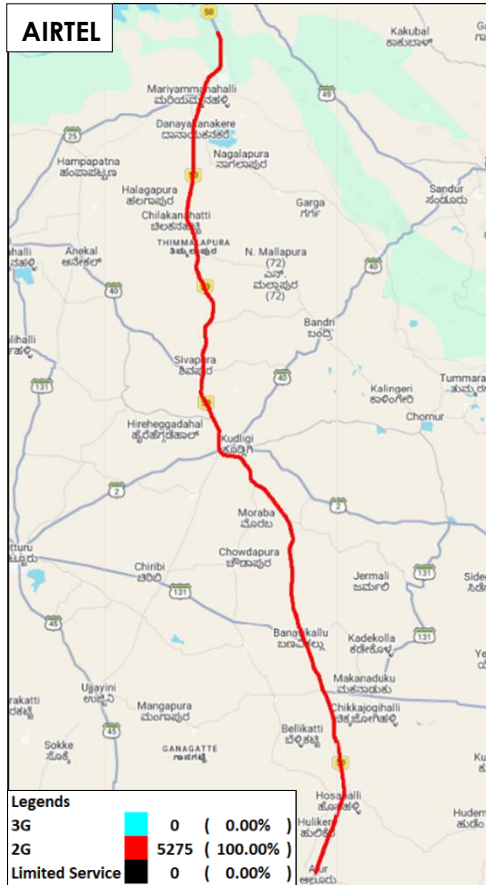


Figure-52: Serving technology plots 3G/2G network mode - AIRTEL.

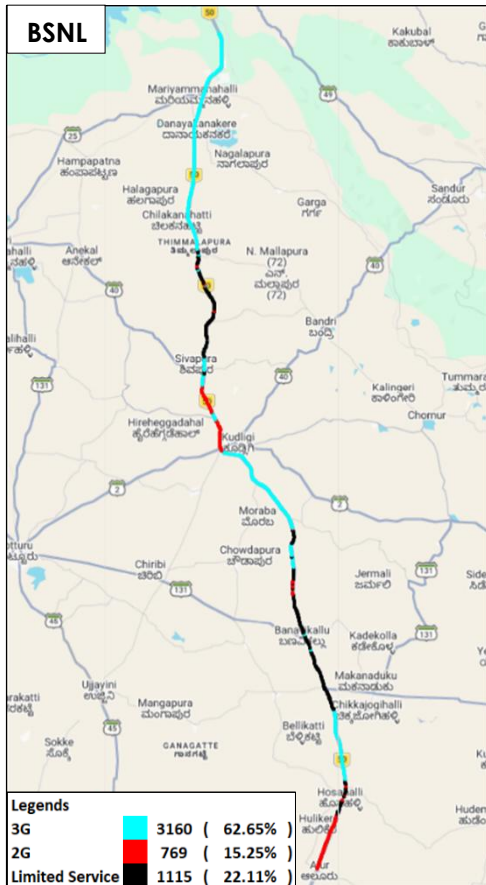


Figure-53: Serving technology plots 3G/2G network mode - BSNL.

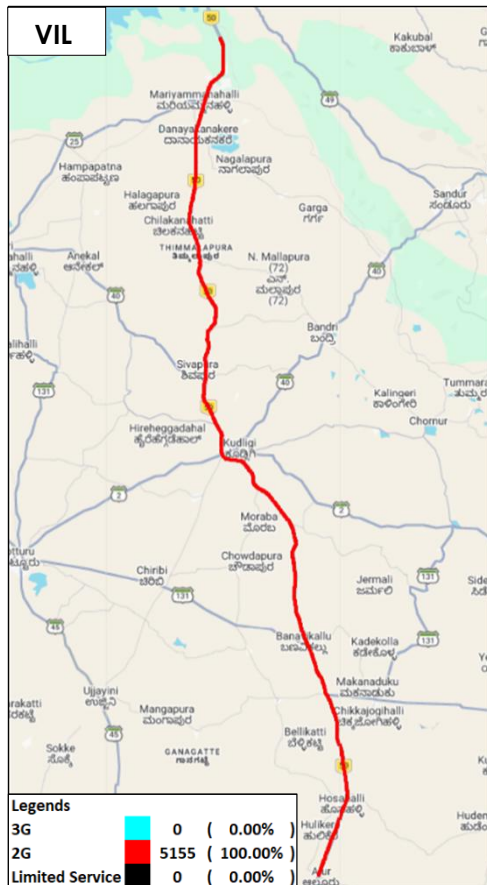


Figure-54: Serving technology plots 3G/2G network mode - VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure-98, 99 & 100 for map view)

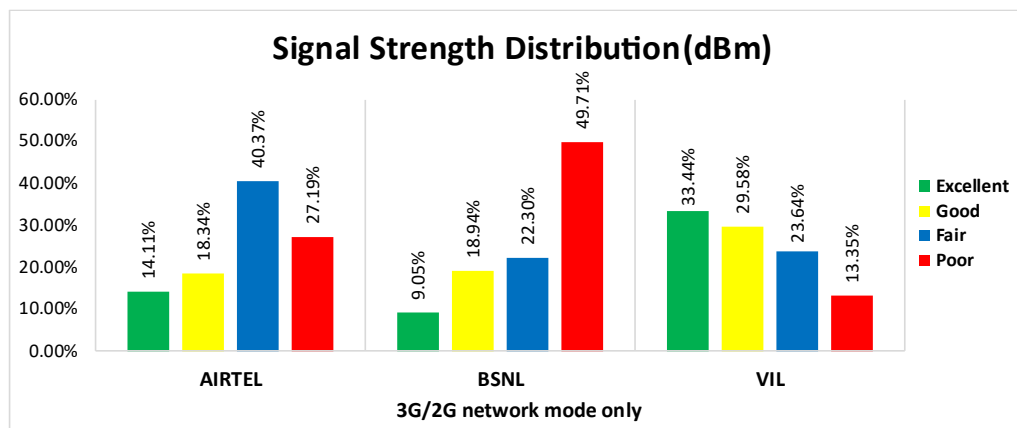


Figure-55: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 14% of samples falling in the excellent signal strength category.
- BSNL has 9% of samples falling in the excellent signal strength category.
- VIL has 33% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	27	42	27	29
Call Setup Success Rate %	100.00	54.76	100.00	96.55
Drop Call Rate %	0.00	13.04	0.00	10.71
Call Setup Time Average (Second)	0.40	1.75	0.50	1.64
Handover Success Rate %	100.00	100.00	99.74	100.00

Table-73: Summary of voice call performance in network auto-selection mode.

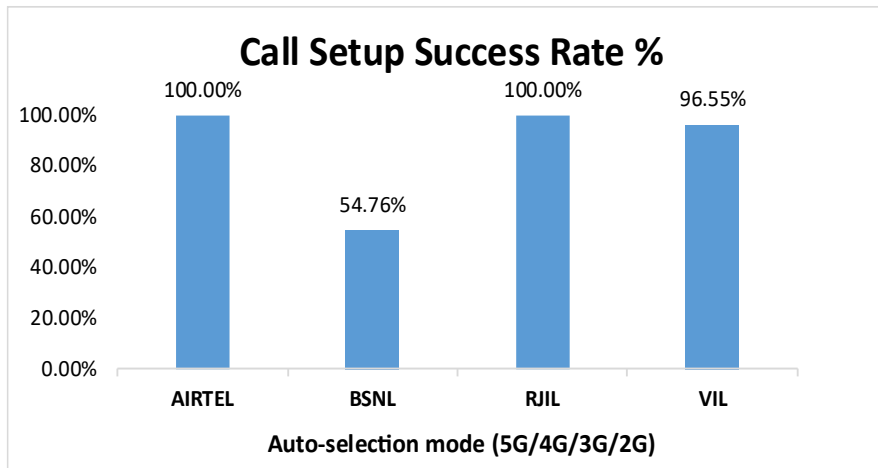


Figure-56: Performance for call setup success rate.

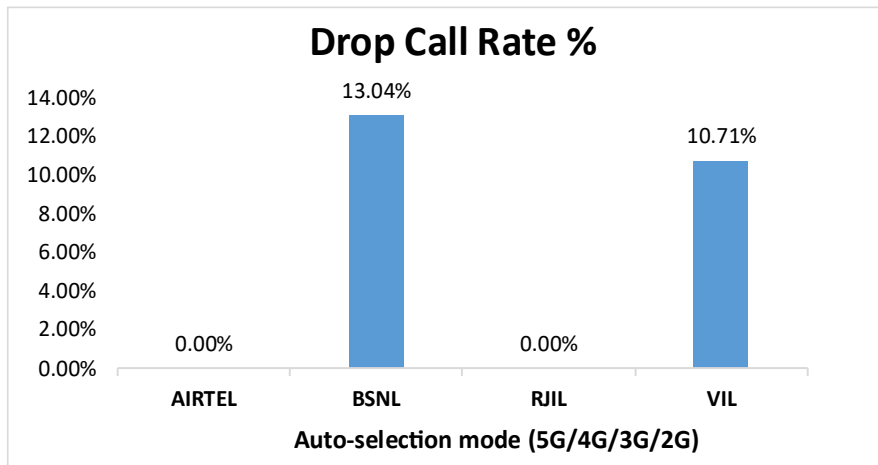


Figure-57: Performance for drop call rate.

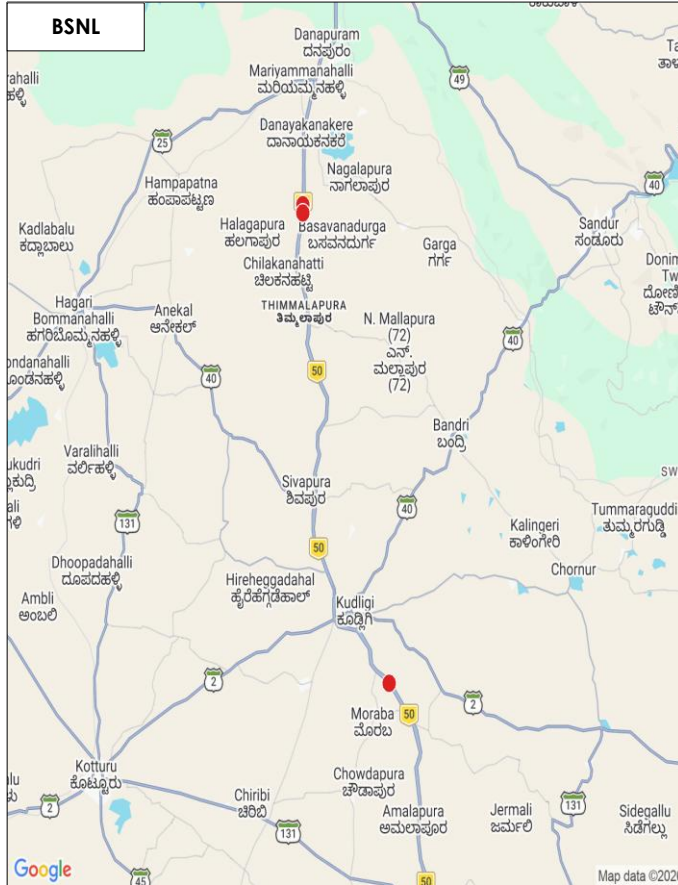


Figure-58: Drop call locations in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

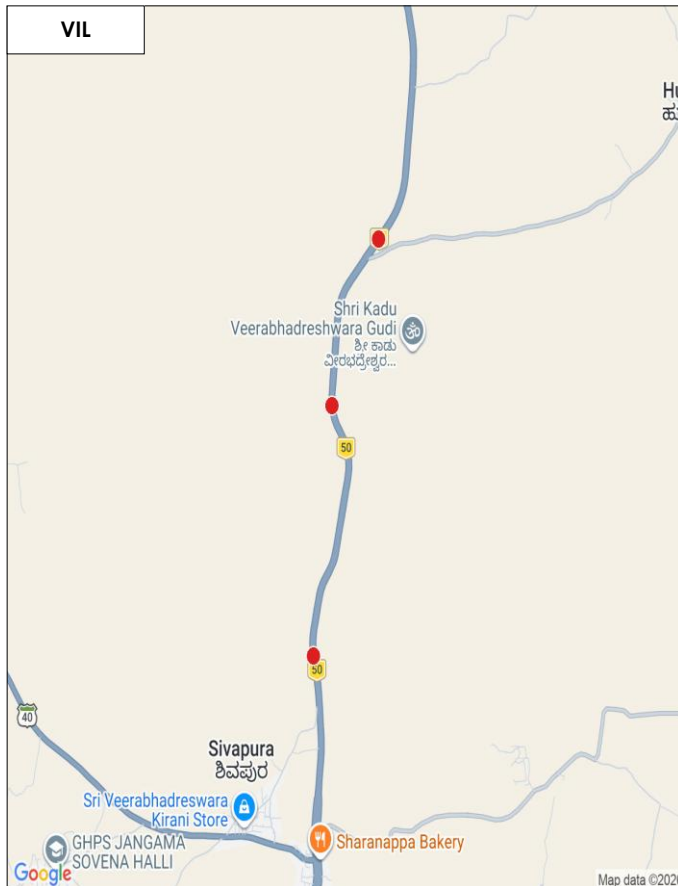


Figure-59: Drop call locations in auto-selection mode (5G/4G/3G/2G) voice - VIL.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G – Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	23	21	21	23
Number of silence call for >4 Sec	0	3	1	1
Silence Call Rate %	0.00	14.29	4.76	4.35
Number of silence instances for >4 Sec	0	4	1	2
Number of silence instances for >3 Sec	0	6	1	4
Number of silence instances for >2 sec	4	9	2	4
RTP Jitter (4G & 5G) in ms	3.10	5.35	9.70	13.30
Packet loss Rate Downlink %	0.55	4.89	1.43	0.50
Packet loss Rate Uplink %	0.54	5.02	0.39	0.39

Table-74: Summary of silence instances & packet loss rate for mobile to mobile call.

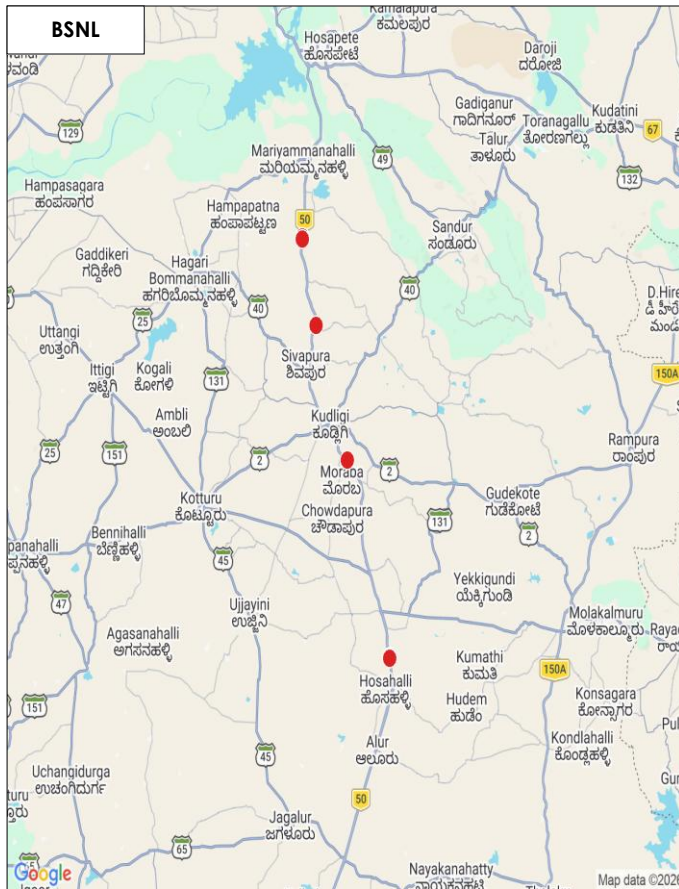


Figure-60: Number of silence instances for >3 Sec Mobile-to-Mobile (5G/4G-Open Mode)-BSNL.

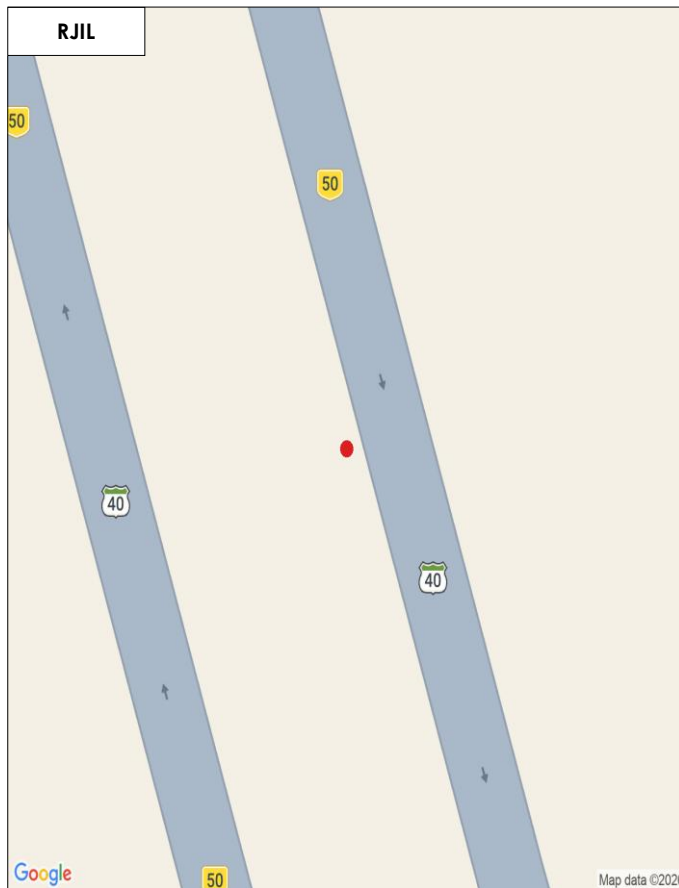


Figure-61: Number of silence instances for >3 Sec Mobile-to-Mobile (5G/4G-Open Mode)-RJIL.

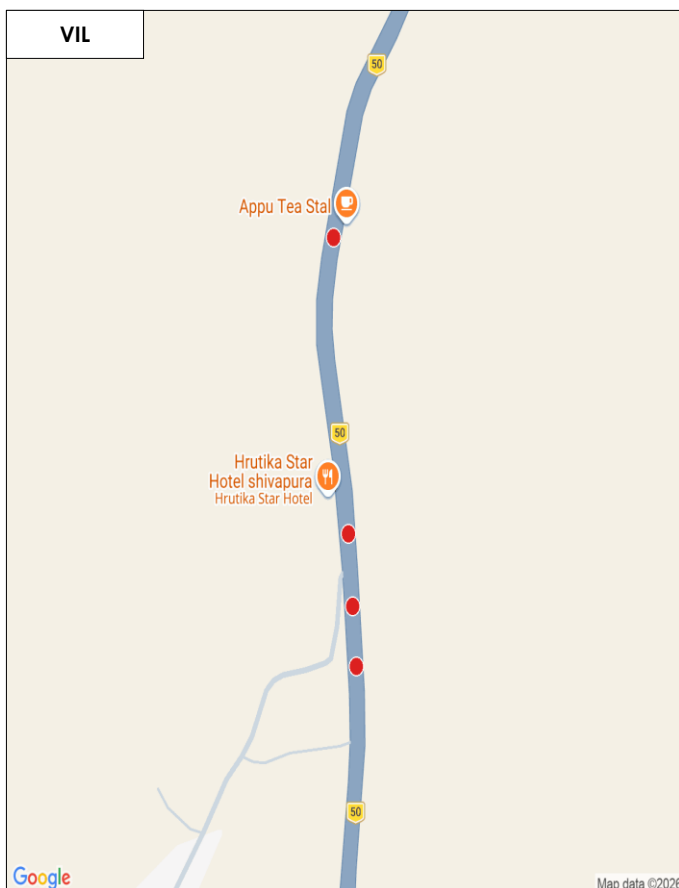


Figure-62: Number of silence instances for >3 Sec Mobile-to-Mobile (5G/4G-Open Mode)-VIL.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-74	299	256	272	252
Speech Quality (Average MOS)	3.93	3.63	4.38	3.53
Number of samples with MOS ≥ 4 to < 5 (Excellent)	223	170	230	116
Number of samples with MOS ≥ 3 to < 4 (Good)	63	24	18	78
Number of samples with MOS ≥ 2 to < 3 (Fair)	7	29	14	34
Number of samples with MOS ≥ 1 to < 2 (Poor)	6	33	10	24
%age of samples with MOS ≥ 4 to < 5 (Excellent)	74.58%	66.41%	84.56%	46.03%
%age of samples with MOS ≥ 3 to < 4 (Good)	21.07%	9.38%	6.62%	30.95%
%age of samples with MOS ≥ 2 to < 3 (Fair)	2.34%	11.33%	5.15%	13.49%
%age of samples with MOS ≥ 1 to < 2 (Poor)	2.01%	12.89%	3.68%	9.52%

Table-75: Summary of speech quality (MOS) samples.

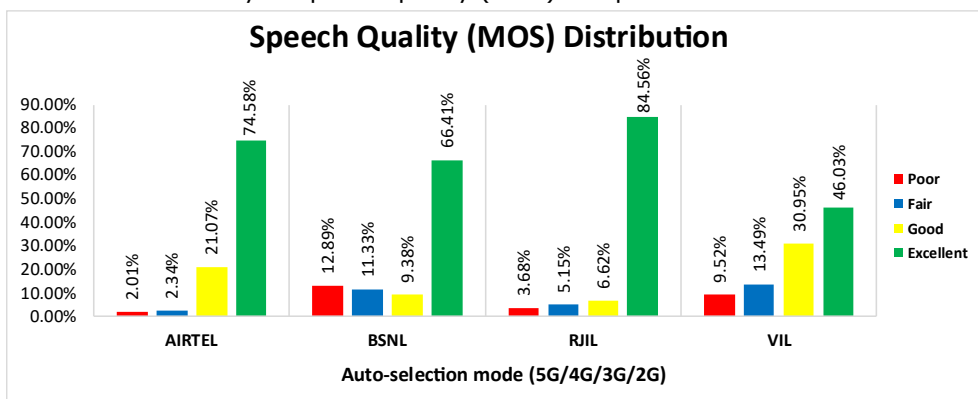


Figure-63: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	1.02%	NA	55.63%	NA
4G	98.98%	78.33%	44.37%	81.39%
3G	NA	11.01%	NA	NA
2G	0.00%	1.70%	NA	18.46%
Limited Service	0.00%	8.96%	0.00%	0.15%

Table-76: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) voice.

Note-

- NA- Service provider doesn't provide services in respective technology.

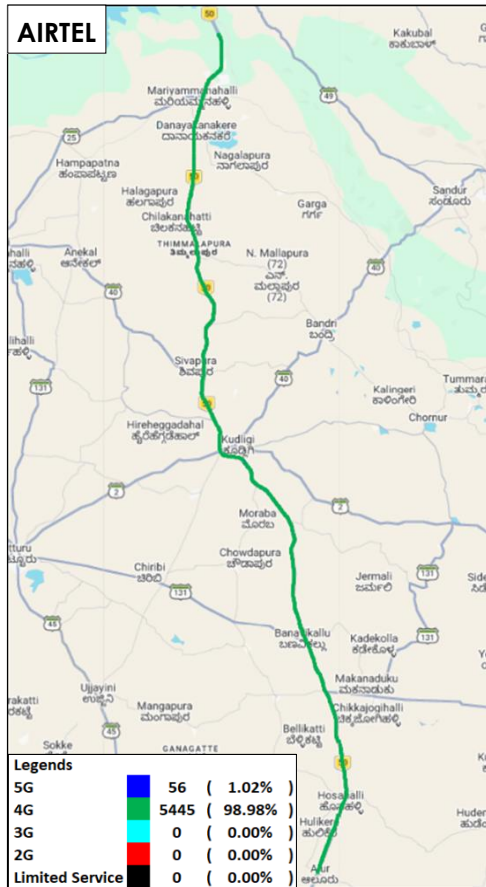


Figure-64: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

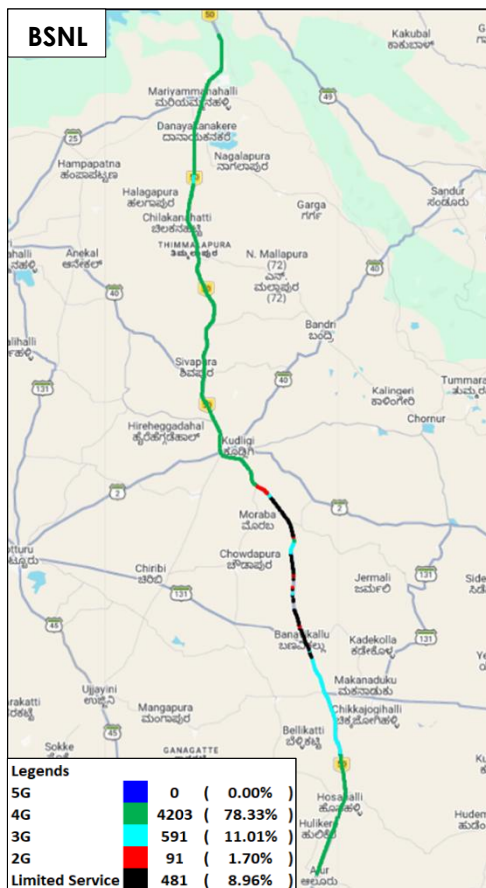


Figure-65: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

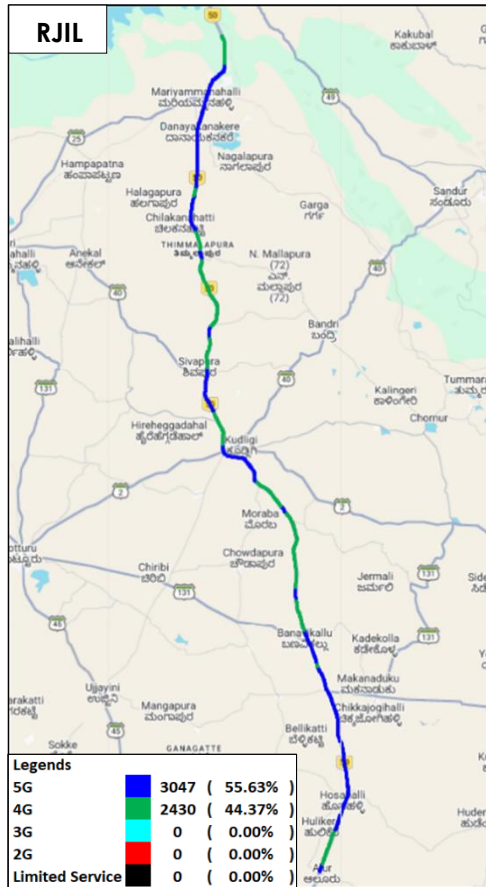


Figure-66: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

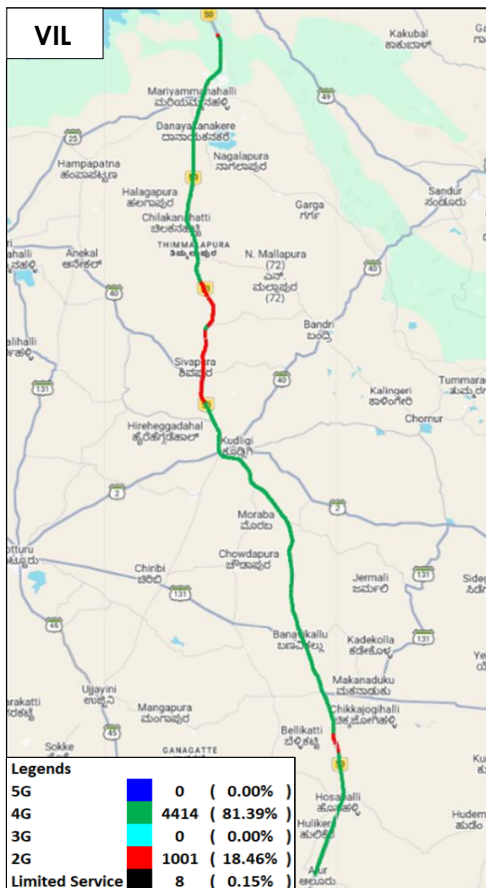


Figure-67: Serving technology plots in auto-selection mode (5G/4G/3G/2G) voice - VIL.

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) voice. (Refer figure-101, 102, 103 & 104 for map view)

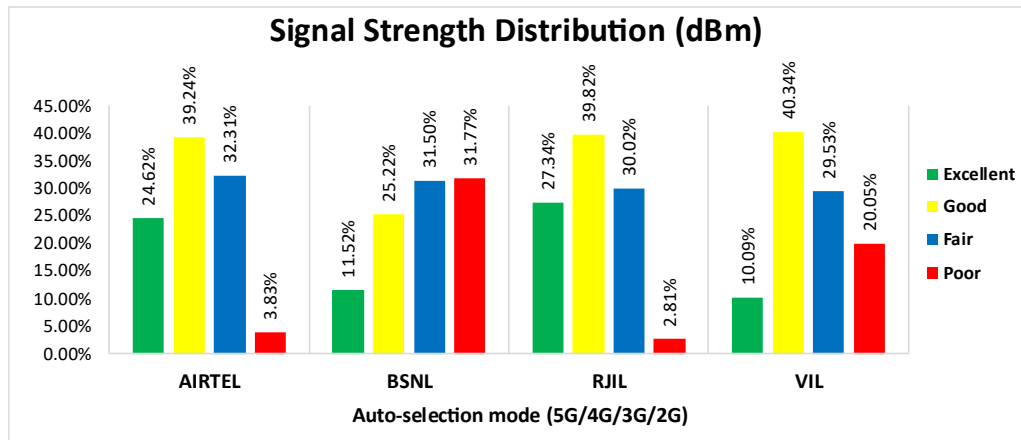


Figure-68: Signal strength distribution auto-selection mode (5G/4G/3G/2G) voice.

Observations:

- Airtel has 25% of samples falling in the excellent signal strength category.
- BSNL has 12% of samples falling in the excellent signal strength category.
- RJIL has 27% of samples falling in the excellent signal strength category.
- VIL has 10% of samples falling in the excellent signal strength category.

(h) Coverage Gap observed

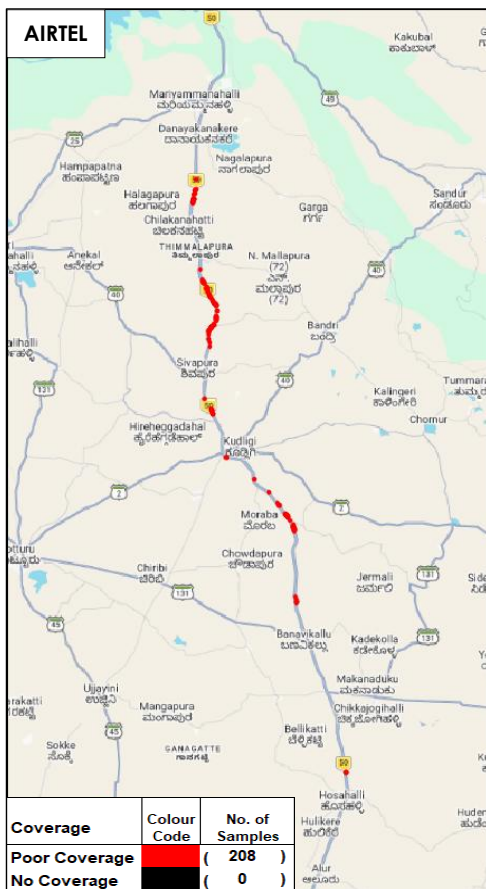


Figure-69: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

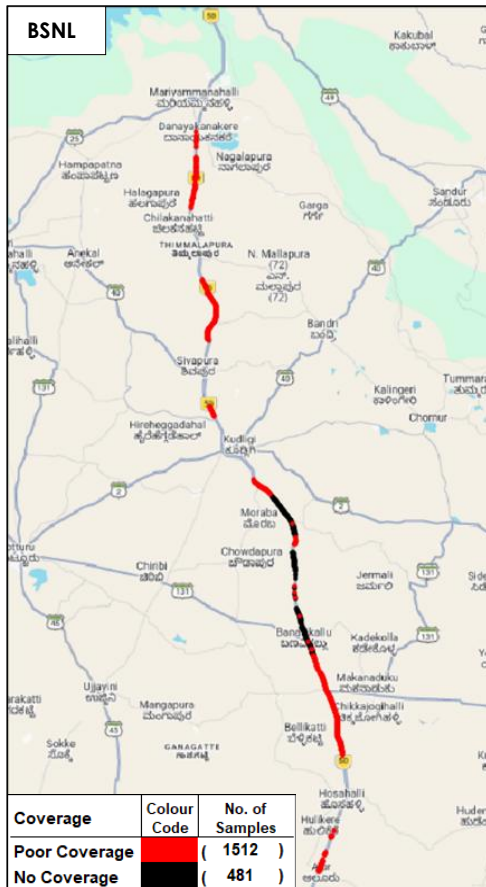


Figure-70: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice - BSNL.

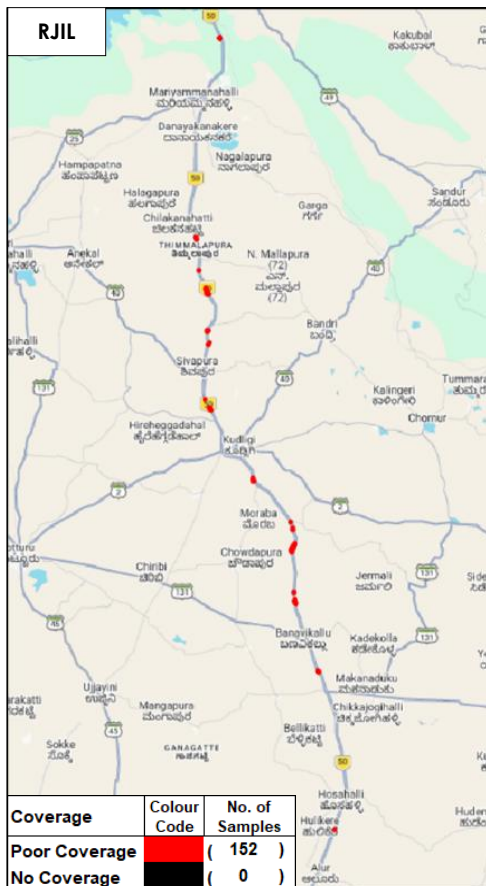


Figure-71: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice - RJIL.

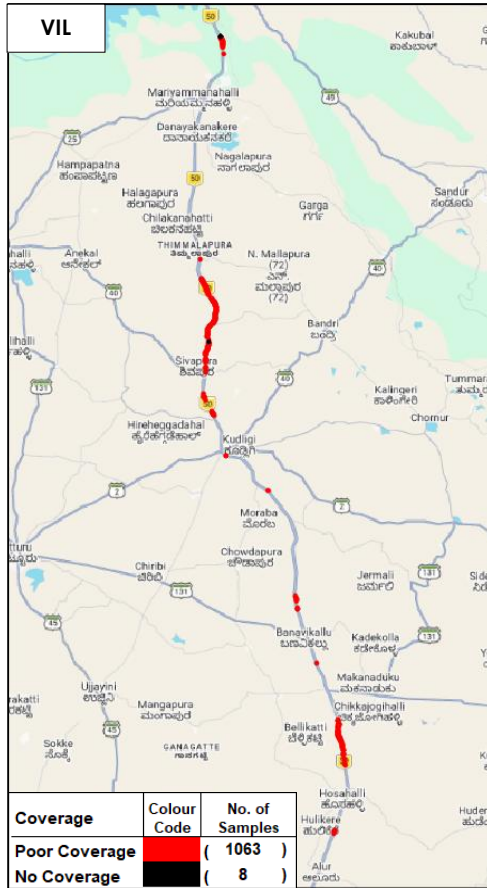


Figure-72: Poor coverage & no coverage locations in auto-selection mode (5G/4G/3G/2G) voice - VIL.

4.5.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	109.91	6.12	269.09	31.44
	80 th Percentile	206.79	9.49	500.33	62.27
	20 th Percentile	14.94	2.78	29.58	7.23
Upload Throughput (Mbits/s)	Average	21.98	2.73	19.29	15.20
	80 th Percentile	32.67	3.66	33.23	23.57
	20 th Percentile	5.51	1.29	2.20	5.32
Latency (ms)	50 th Percentile	25.90	62.78	22.77	35.08

Table-77: Summary of Data performance in network auto-selection mode.

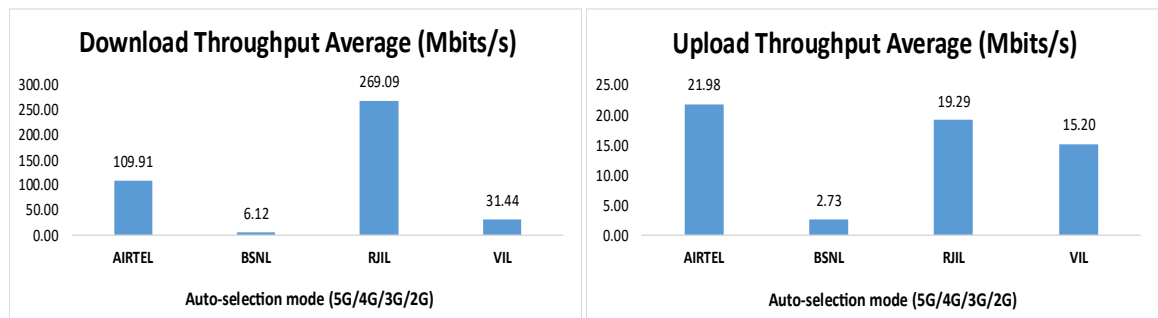


Figure-73: Download & Upload throughput.

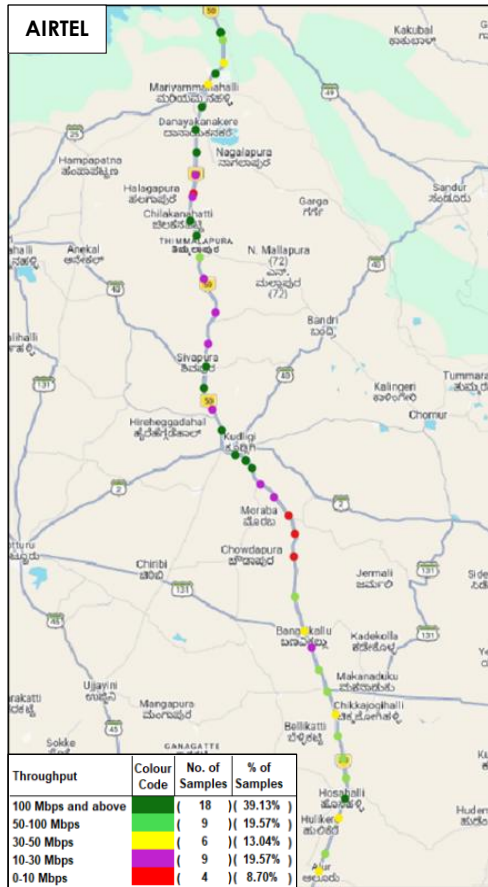


Figure-74: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - AIRTEL.

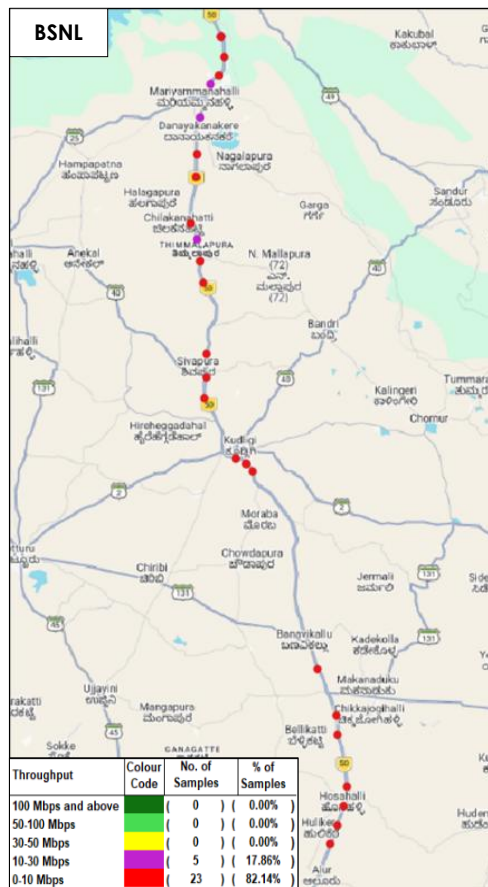


Figure-75: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - BSNL.

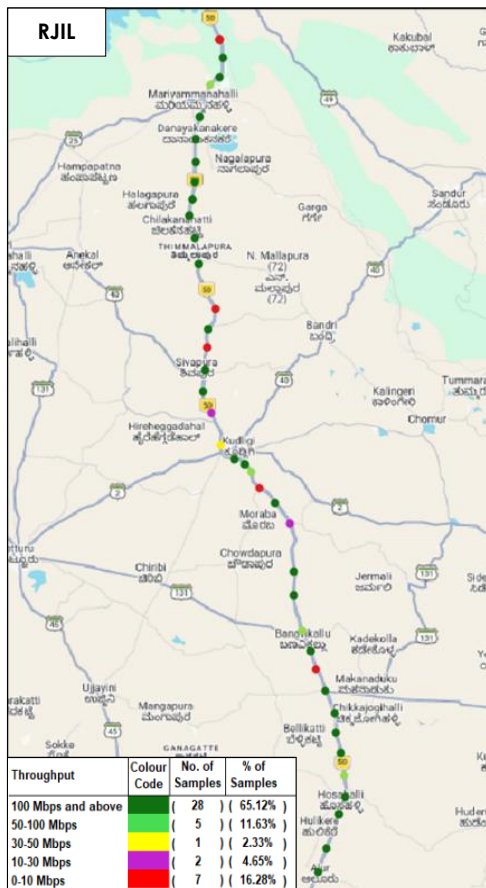


Figure-76: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - RJIL.

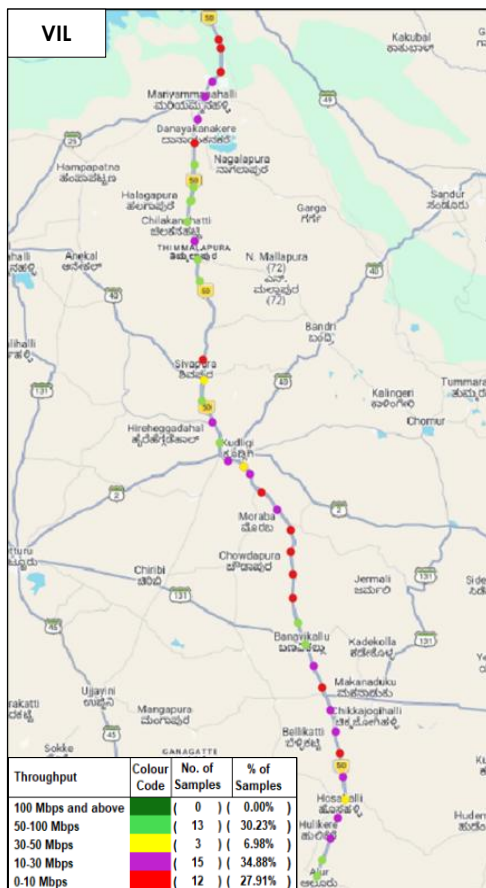


Figure-77: Download throughput distribution auto-selection mode (5G/4G/3G/2G) - VIL.

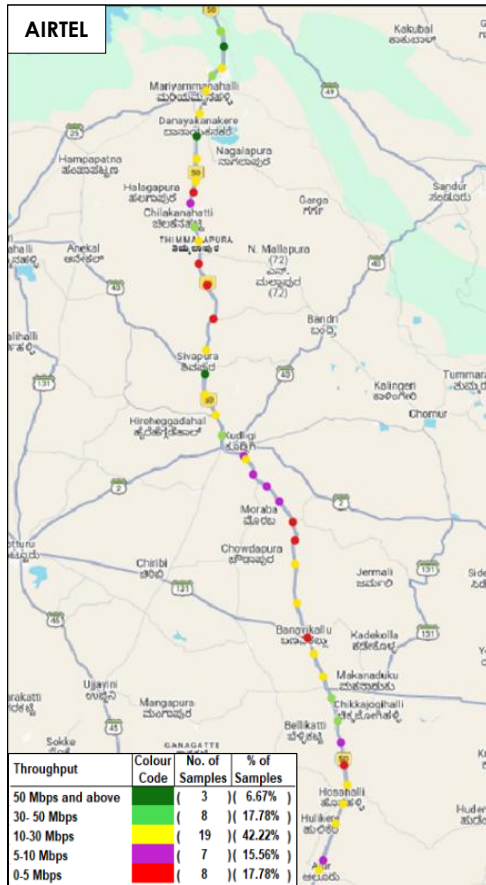


Figure-78: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) - AIRTEL.

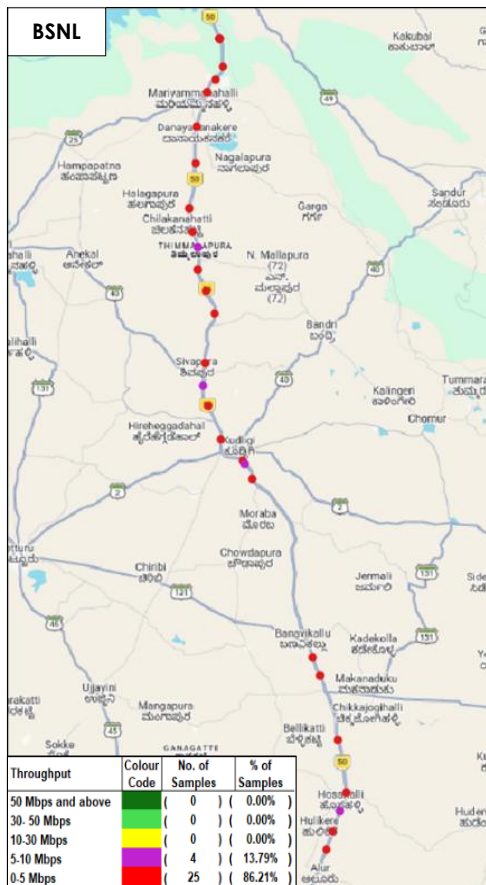


Figure-79: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) - BSNL.

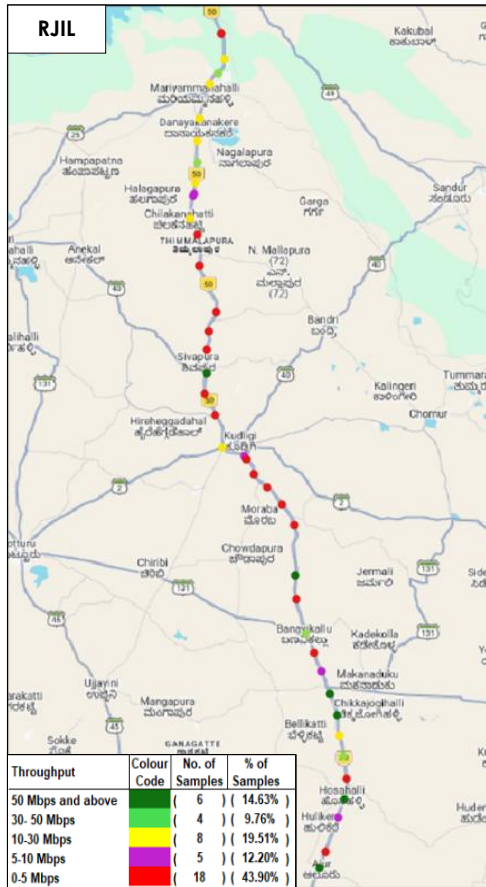


Figure-80: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) - RJIL.

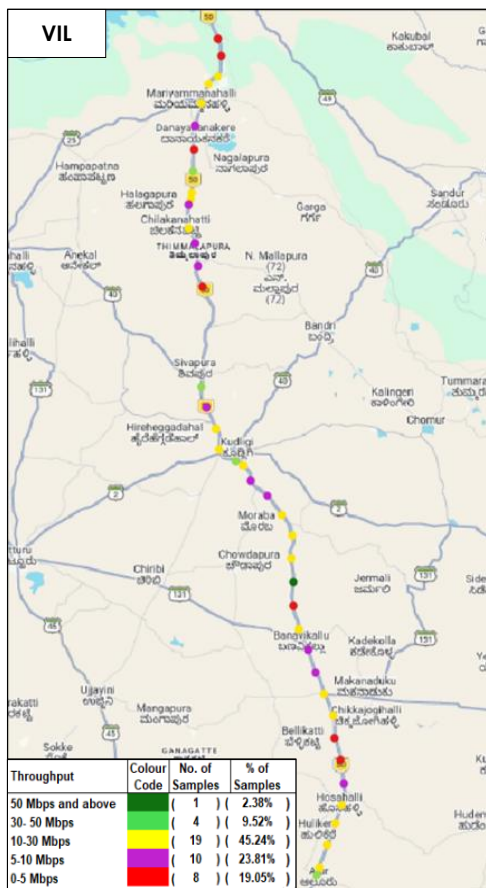


Figure-81: Upload throughput distribution auto-selection mode (5G/4G/3G/2G) - VIL.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	43.77%	NA	72.47%	NA
4G	56.23%	63.05%	27.53%	95.62%
3G	NA	28.55%	NA	NA
2G	0.00%	1.37%	NA	4.38%
Limited Service	0.00%	7.02%	0.00%	0.00%

Table-78: Time spent on technology during drive test in auto-selection mode (5G/4G/3G/2G) data.

Note-

- NA- Service provider doesn't provide services in respective technology.

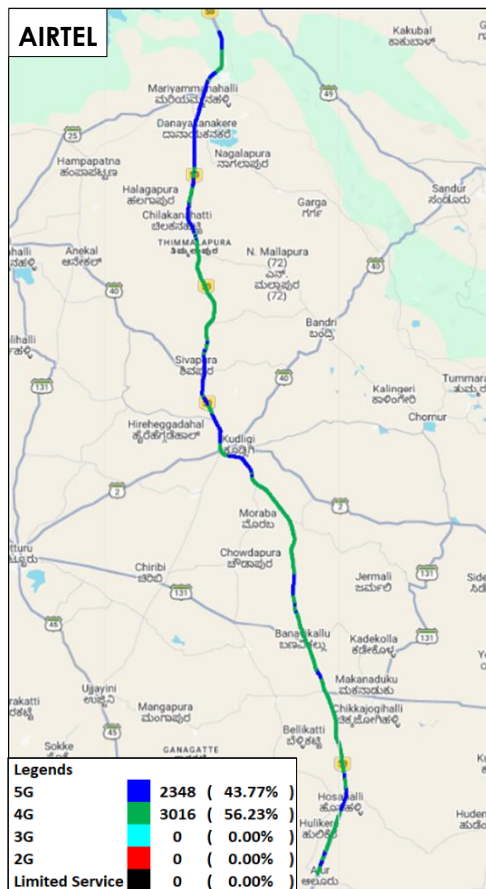


Figure-82: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

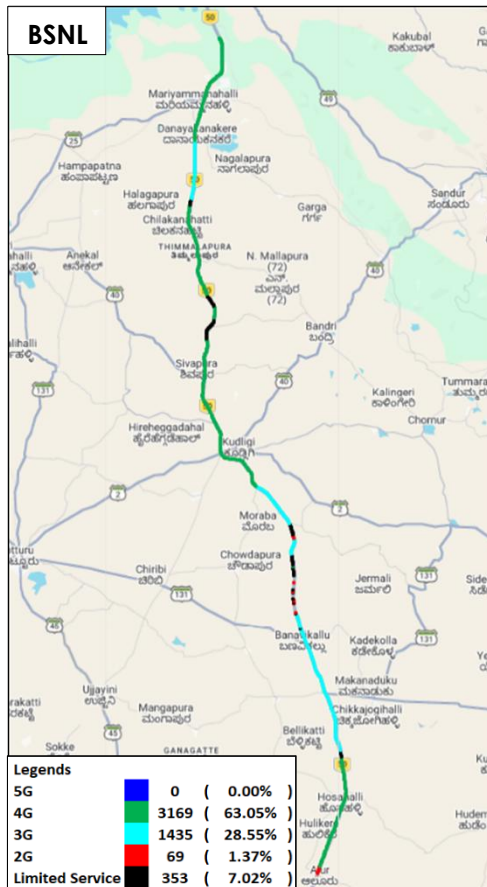


Figure-83: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - BSNL.

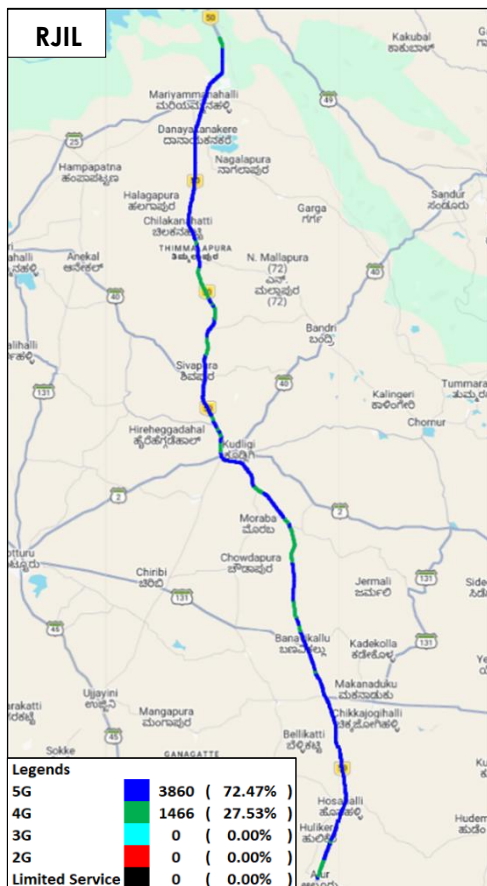


Figure-84: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - RJIL.

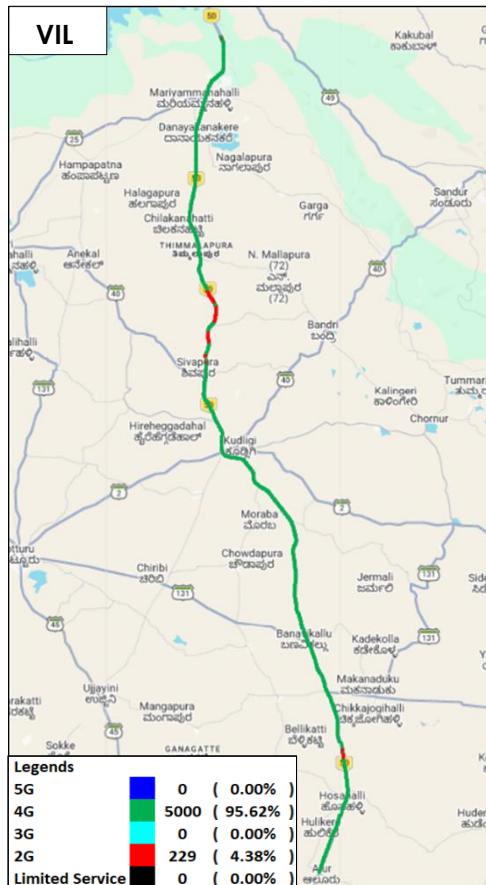


Figure-85: Serving technology plots in auto-selection mode (5G/4G/3G/2G) data - VIL.

(c) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G) data. (Refer figure-105, 106, 107 & 108 for map view)

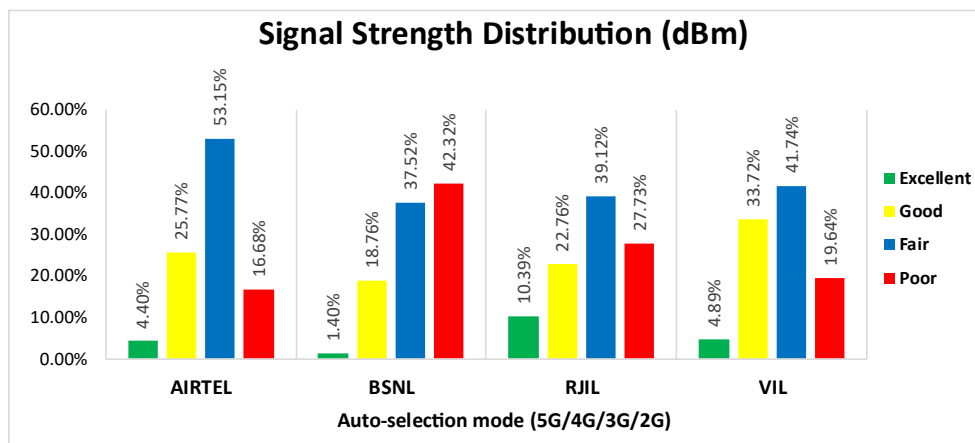


Figure-86: Signal strength distribution auto-selection mode (5G/4G/3G/2G) data.

Observations:

- Airtel has 4% of samples falling in the excellent signal strength category.
- BSNL has 1% of samples falling in the excellent signal strength category.
- RJIL has 10% of samples falling in the excellent signal strength category.
- VIL has 5% of samples falling in the excellent signal strength category.

5. Voice & Data Key findings

5.1 Overall Voice

1. Call Setup Success Rate:

- a) Airtel, BSNL and VIL have 99.17%, 48.16% and 99.17% call setup success rate respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL have 98.87%, 82.05%, 99.86% and 94.31% call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- c) Airtel, BSNL & VIL have 100.00% call setup success rate while calling on peer service provider's network for inter-operator calls. (refer table-9)
- d) RJIL had a 100.00% call setup success rate when calling to Airtel, while call blocking were observed when calling BSNL & VIL. (refer table-9)

2. Call Setup Time:

- a) Airtel, BSNL and VIL call setup time is 4.16, 2.61 & 4.12 seconds respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL & VIL call setup time is 0.40, 1.49, 0.69 & 1.31 seconds respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

3. Call Silence/Mute Rate: In packet switched network (4G/5G) VIL, BSNL, Airtel & RJIL have 7.56%, 6.19%, 1.80% & 1.25% silence call rate respectively. Further BSNL has higher RTP packet loss rate in downlink (5.14%) compared to VIL (2.57%), RJIL (1.50%) & Airtel (1.19%). In uplink the RTP packet loss rate is higher for BSNL (4.24%) compared to VIL (2.32%), Airtel (0.81%) & RJIL (0.64%). (refer table-6)

4. Drop Call Rate:

- a) Airtel, BSNL and VIL drop call rate is 0.21%, 6.18% and 1.88% respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL drop call rate is 0.14%, 6.16%, 0.57% and 1.76% respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

5.2 Overall Data

1. Data download and upload performance (Overall i.e. LSA):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 90.99 Mbps, 9.18 Mbps, 169.51 Mbps and 23.40 Mbps respectively. (refer table-11)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 20.87 Mbps, 5.07 Mbps, 15.34 Mbps and 11.29 Mbps respectively. (refer table-11)

2. Data download and upload performance (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 116.18 Mbps, 7.70 Mbps, 289.73 Mbps and 23.93 Mbps respectively. (refer table-35)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 24.62 Mbps, 4.06 Mbps, 29.88 Mbps and 13.10 Mbps respectively. (refer table-35)

3. Data session setup success rate (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL have 100.00%, 100.00%, 93.85% and 98.46% download session setup success rate respectively. (refer table-35)
- b) Airtel, BSNL, RJIL and VIL have 100.00%, 100.00%, 93.85% and 98.46% upload session setup success rate respectively. (refer table-35)

5.3 Operator wise Key Findings

1. Airtel:

Voice

- 99.17% call setup success rate and 0.21% drop call rate have been observed in 3G/2G network mode for LSA. (refer table-3)
- 98.87% call setup success rate and 0.14% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. (refer table-5)
- 99.12% call setup success rate and 0.22% drop call rate have been observed in 3G/2G network mode for city drive. (refer table-13)
- 98.33% call setup success rate and 0.21% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at all walk test locations. (refer table-63 to 66)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in 3G/2G network mode for highway drive. (refer table-71)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. (refer table-73)

Data

- Airtel has 90.99 Mbps average download speed & 20.87 Mbps average upload speed for LSA. (refer table-11)
- Airtel has 87.50 Mbps average download speed & 20.69 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 100 Mbps) except Kamalapura Archaeological Museum (ASI Museum), Karnataka One Centre Hosapete and Kotturu Bus Stand for auto-selection mode (5G/4G/3G/2G). (refer table-36, 37, 38, 39, 40, 41, 45, 46, 47 & 48)
- All hotspot locations have less upload speed (less than 20 Mbps) except District Court Complex Hosapete, Kamalapura Archaeological Museum (ASI Museum), Karnataka One Centre Hosapete and Kotturu Bus Stand for auto-selection mode (5G/4G/3G/2G). (refer table-36, 38, 39, 40, 41, 45, 46, 47 & 48)
- All Walk test locations have less download speed (less than 100 Mbps) except Hosapete Junction Railway Station for auto-selection mode (5G/4G/3G/2G). (refer table-68, 69 & 70)
- All Walk test locations have less upload speed (less than 20 Mbps) except Hosapete Junction Railway Station for auto-selection mode (5G/4G/3G/2G). (refer table-68, 69 & 70)
- Airtel has 109.91 Mbps average download speed & 21.98 Mbps average upload speed across the measured routes for highway drive. (refer table-77)

2. BSNL:

Voice

- 48.16% call setup success rate and 6.18% drop call rate have been observed in 3G/2G network mode for LSA. (refer table-3)
- 82.05% call setup success rate and 6.16% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. (refer table-5)
- 49.47% call setup success rate and 6.17% drop call rate have been observed in 3G/2G network mode for city drive. (refer table-13)
- 77.98% call setup success rate and 8.71% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. (refer table-15)
- 99.23% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. (refer table-21)
- 94.74% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Hosapete Junction Railway Station walk test location. (refer table-63)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Lotus Mahal - Hampi & Virupaksha Temple Complex walk test locations. (refer table-64 & 66)
- 95.65% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Vijay Vitthal Temple walk test location. (refer table-65)
- 31.37% call setup success rate and 6.25% drop call rate have been observed in 3G/2G network mode for highway drive. (refer table-71)
- 54.76% call setup success rate and 13.04% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. (refer table-73)

Data

- BSNL has 9.18 Mbps average download speed & 5.07 Mbps average upload speed for LSA. (refer table-11)
- BSNL has 10.47 Mbps average download speed & 5.41 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- All hotspot locations have less download speed (less than 10 Mbps) except Hampi Utsav Grounds and Tourist Parking Area, Superintendent of Police Office Hosapete and Vijayanagara Deputy Commissioner Office Hosapete for auto-selection mode (5G/4G/3G/2G). (refer table-36, 37, 38, 40, 41, 42, 43, 44, 45 & 47)
- Achyutaraya Temple Complex Hampi, Karnataka One Centre Hosapete, Queen's Bath Hampi and Tungabhadra Dam Entrance & Garden have less upload speed (less than 2 Mbps) out of total 13 hotspots locations for auto-selection mode (5G/4G/3G/2G). (refer table-36, 43, 45 & 47)
- All Walk test locations have less download speed (less than 10 Mbps) except Lotus Mahal - Hampi for auto-selection mode (5G/4G/3G/2G). (refer table-67, 69 & 70)
- Vijay Vitthal Temple has less upload speed (less than 2 Mbps) out of total 4 Walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-69)

- BSNL has 6.12 Mbps average download speed & 2.73 Mbps average upload speed across the measured routes for highway drive. (refer table-77)

3. RJIL:

Voice

- 99.86% call setup success rate and 0.57% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. (refer table-5)
- 100.00% call setup success rate and 0.42% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. (refer table-15)
- 100.00% call setup success rate and 0.77% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Hosapete Junction Railway Station, Lotus Mahal - Hampi & Vijay Vitthal Temple walk test locations. (refer table-63, 64 & 65)
- 94.44% call setup success rate and 5.88% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Virupaksha Temple Complex walk test location. (refer table-66)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. (refer table-73)

Data

- RJIL has 169.51 Mbps average download speed & 15.34 Mbps average upload speed for LSA. (refer table-11)
- RJIL has 151.30 Mbps average download speed & 14.00 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Achyutaraya Temple Complex Hampi, Hampi Utsav Grounds and Tourist Parking Area and Tungabhadra Dam Entrance & Garden have less download speed (less than 100 Mbps) out of total 13 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-36, 39 & 47)
- Achyutaraya Temple Complex Hampi, Government CHC Kamlapura, Hampi Utsav Grounds and Tourist Parking Area, Hosapete City Municipal Council Office, Queen's Bath Hampi and Tungabhadra Dam Entrance & Garden locations have less upload speed (less than 20 Mbps) out of total 13 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-36, 38, 39, 41, 45 & 47)
- Vijay Vitthal Temple and Virupaksha Temple Complex have less download speed (less than 100 Mbps) out of total 4 Walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-69 & 70)
- All Walk test locations have less upload speed (less than 20 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table-67 to 70)
- RJIL has 269.09 Mbps average download speed & 19.29 Mbps average upload speed across the measured routes for highway drive. (refer table-77)

4. VIL:

Voice

- 99.17% call setup success rate and 1.88% drop call rate have been observed in 3G/2G network mode for LSA. (refer table-3)

- 94.31% call setup success rate and 1.76% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. (refer table-5)
- 99.12% call setup success rate and 1.11% drop call rate have been observed in 3G/2G network mode for city drive. (refer table-13)
- 97.09% call setup success rate and 1.71% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. (refer table-21)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Hosapete Junction Railway Station, Lotus Mahal - Hampi & Virupaksha Temple Complex walk test locations. (refer table-63, 64 & 66)
- 18.75% call setup success rate and 16.67% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Vijay Vitthal Temple walk test location. (refer table-65)
- 100.00% call setup success rate and 14.29% drop call rate have been observed in 3G/2G network mode for highway drive. (refer table-71)
- 96.55% call setup success rate and 10.71% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. (refer table-73)

Data

- VIL has 23.40 Mbps average download speed & 11.29 Mbps average upload speed for LSA. (refer table-11)
- VIL has 22.09 Mbps average download speed & 10.77 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Achyutaraya Temple Complex Hampi, Hampi Utsav Grounds and Tourist Parking Area, Hosapete City Municipal Council Office, Karnataka One Centre Hosapete and Kotturu Bus Stand have less download speed (less than 10 Mbps) out of total 13 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-36, 39, 41, 43 & 44)
- Achyutaraya Temple Complex Hampi has less upload speed (less than 2 Mbps) out of total 13 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table-36)
- Vijay Vitthal Temple and Virupaksha Temple Complex have less download speed (less than 10 Mbps) out of total 4 Walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-69 & 70)
- Vijay Vitthal Temple has less upload speed (less than 2 Mbps) out of total 4 Walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table-69)
- VIL has 31.44 Mbps average download speed & 15.20 Mbps average upload speed across the measured routes for highway drive. (refer table-77)

6. Annexure

6.1 Route wise coverage map

6.1.1 City

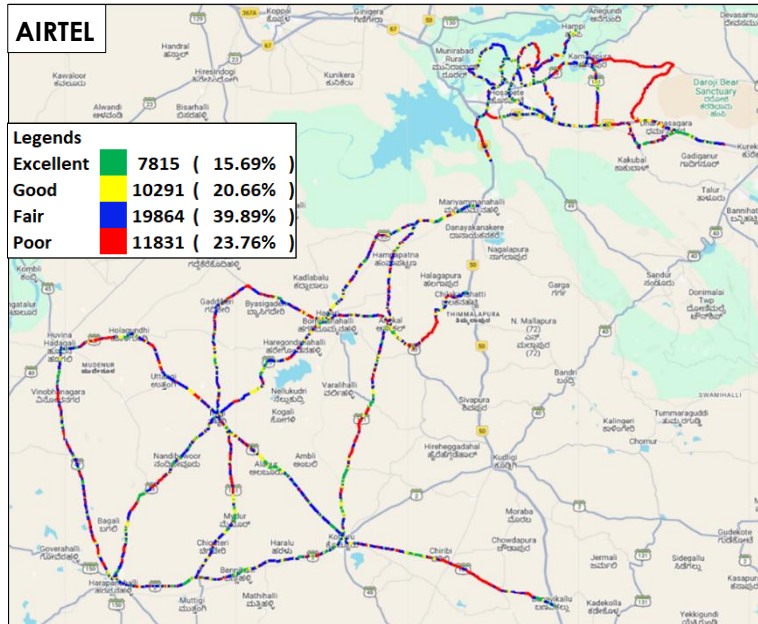


Figure-87: Signal strength 3G/2G network mode voice - AIRTEL.

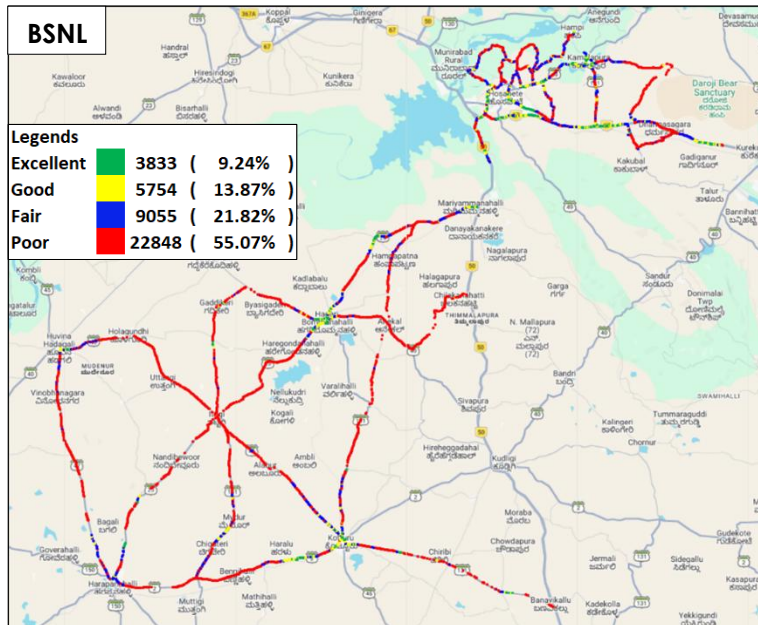


Figure-88: Signal strength 3G/2G network mode voice - BSNL.

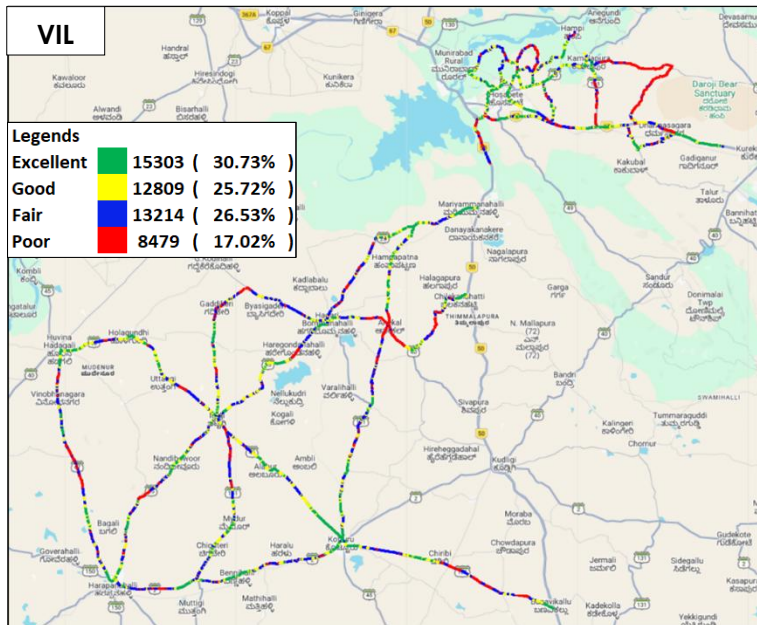


Figure-89: Signal strength 3G/2G network mode voice - VIL.

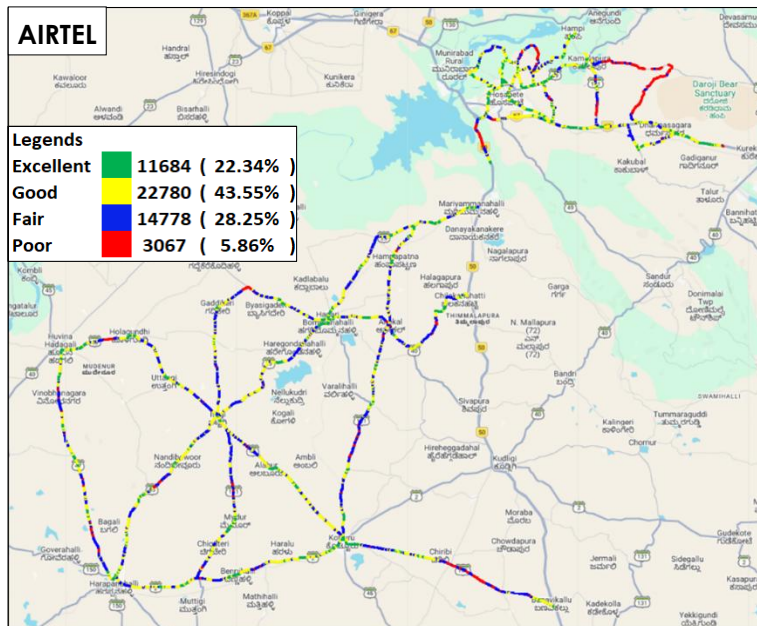


Figure-90: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

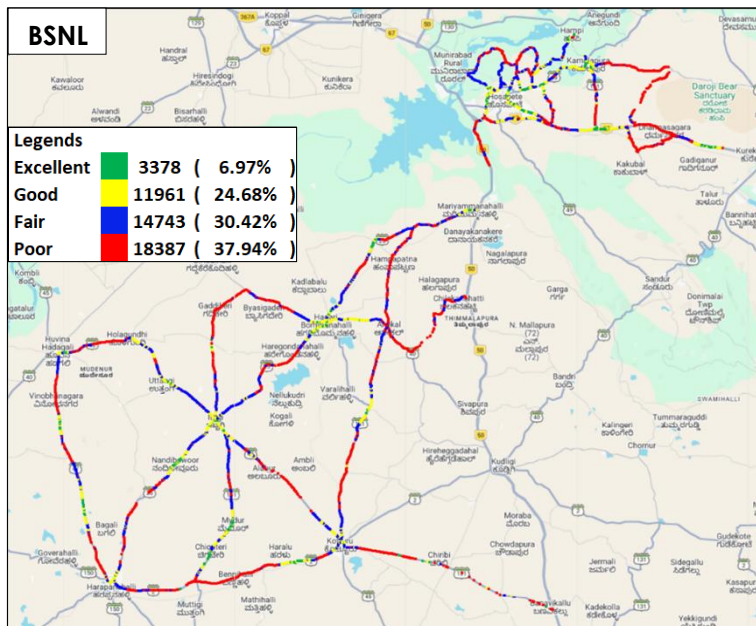


Figure-91: Signal strength auto-selection mode (5G/4G/3G/2G) voice - BSNL.

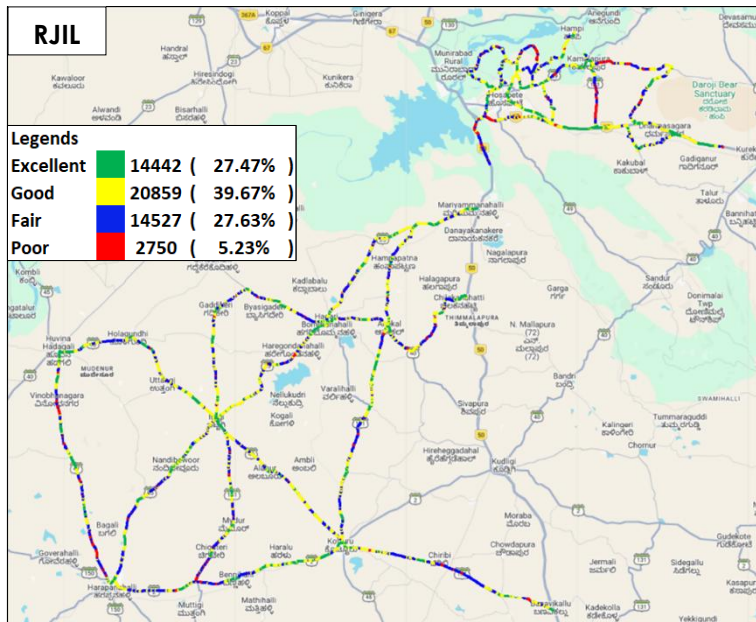


Figure-92: Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

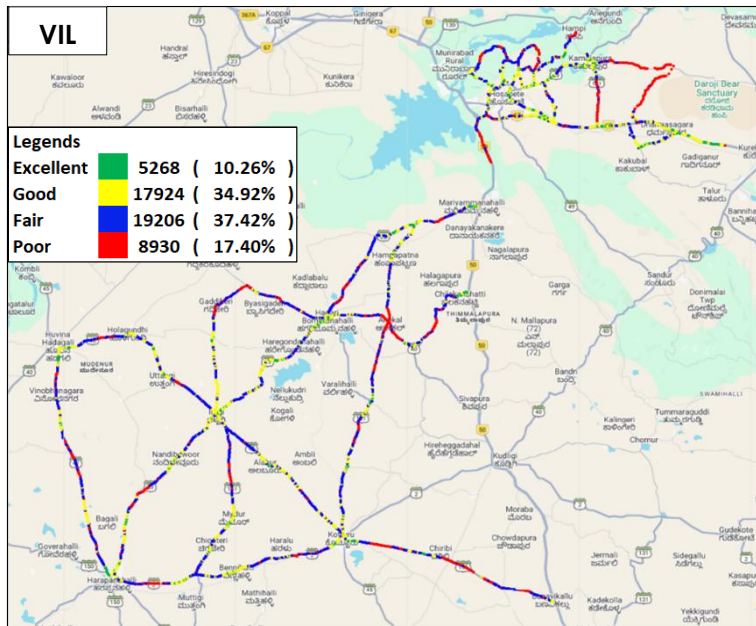


Figure-93: Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.

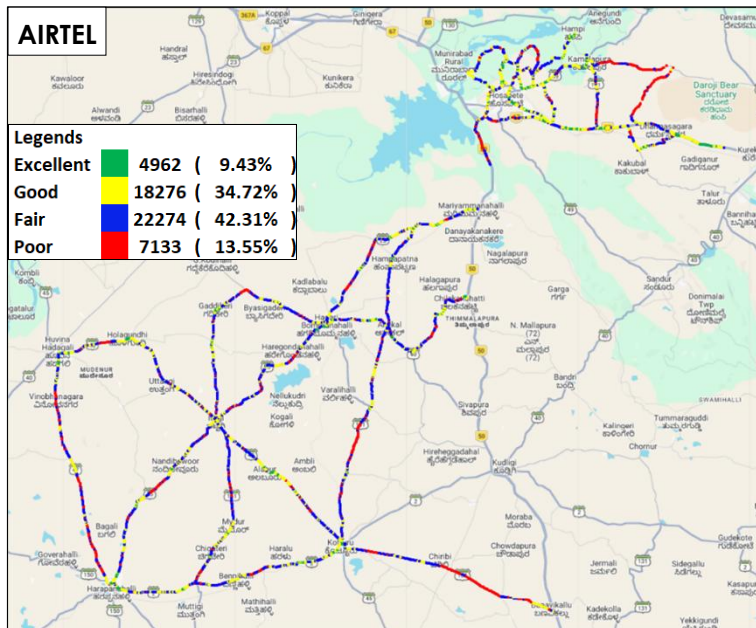


Figure-94: Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

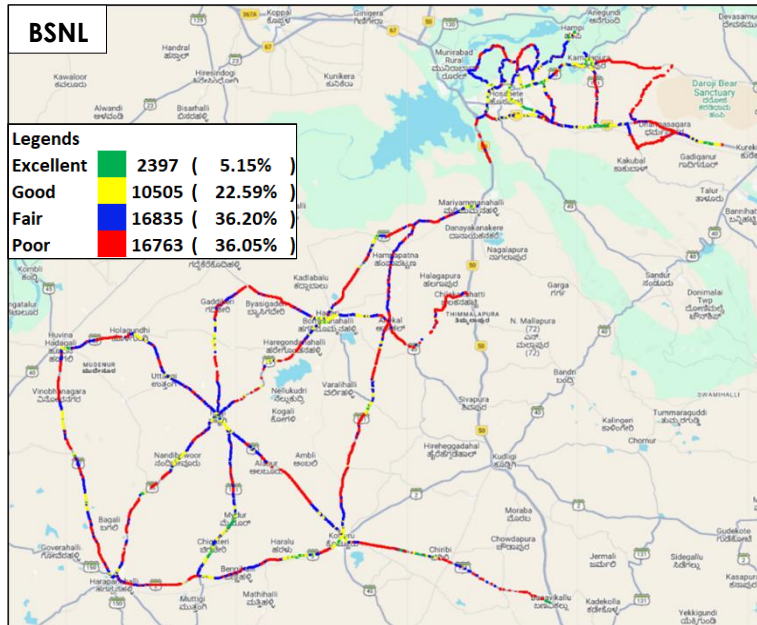


Figure-95: Signal strength auto-selection mode (5G/4G/3G/2G) data - BSNL.

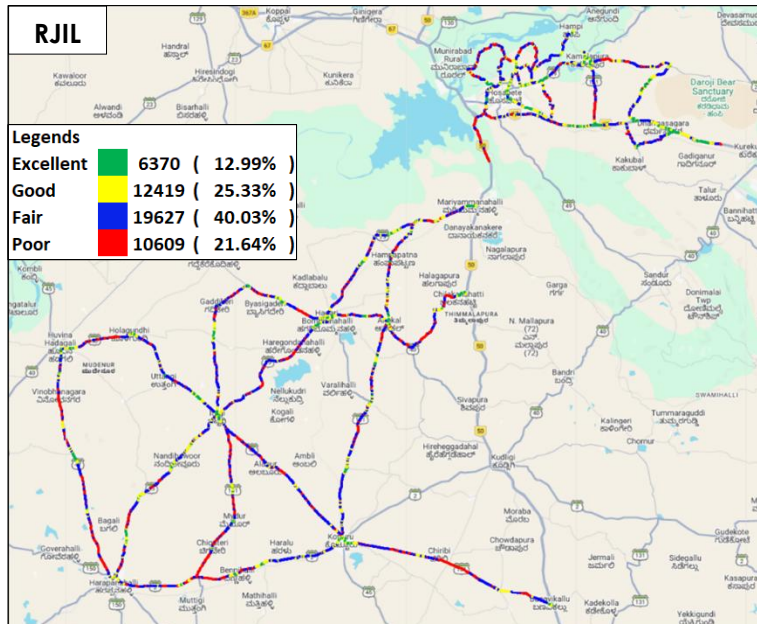


Figure-96: Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

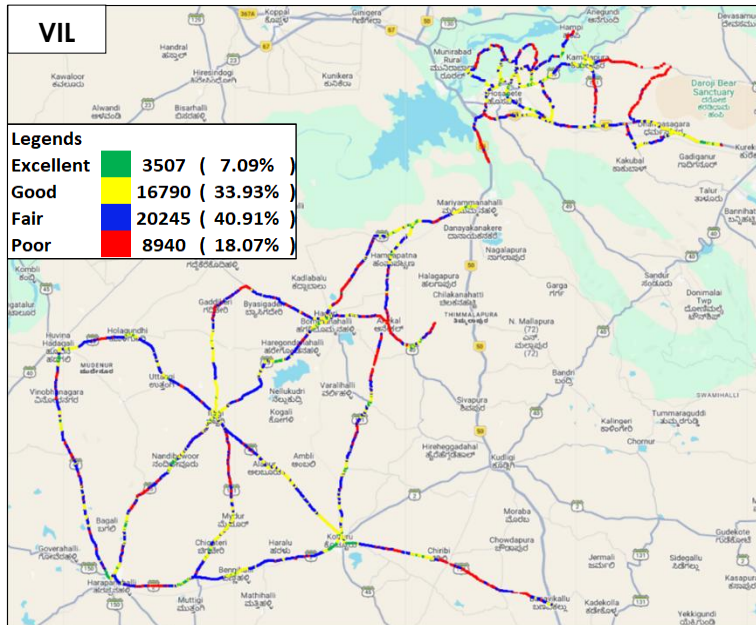


Figure-97: Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

6.1.2 Highway

i) Hosapete to Banavikallu via NH-50

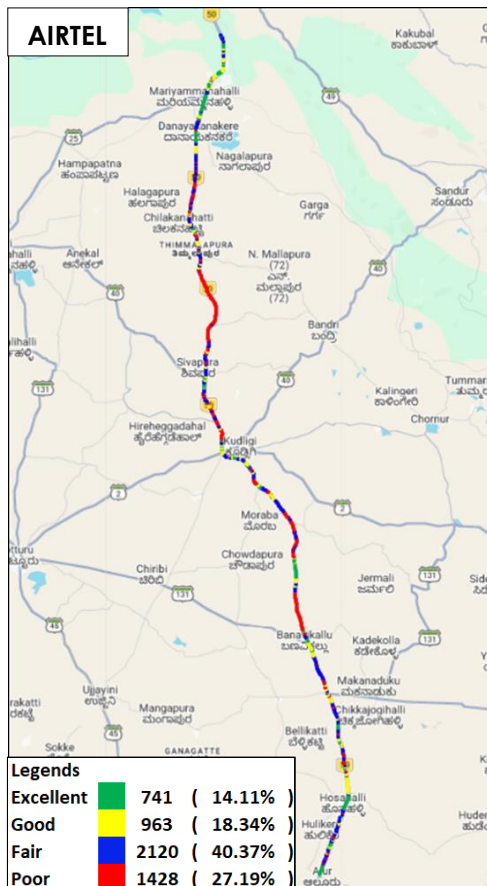


Figure-98: Signal strength 3G/2G network mode voice - AIRTEL.

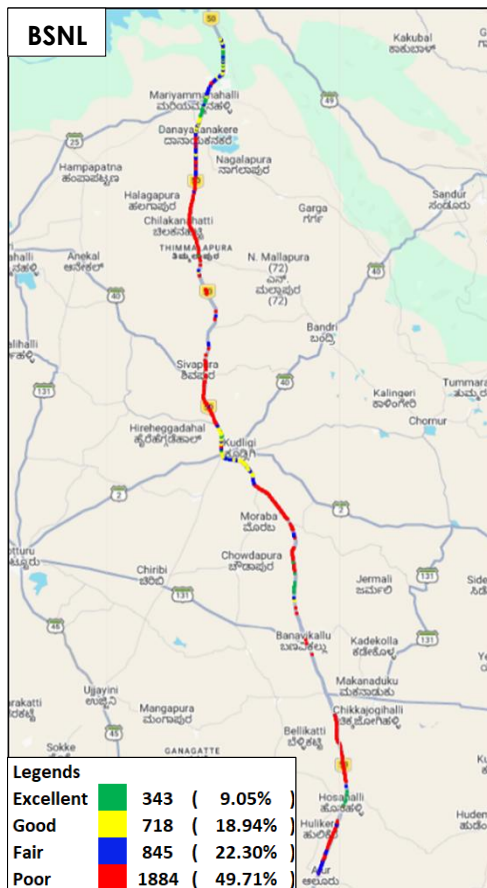


Figure-99: Signal strength 3G/2G network mode voice - BSNL.

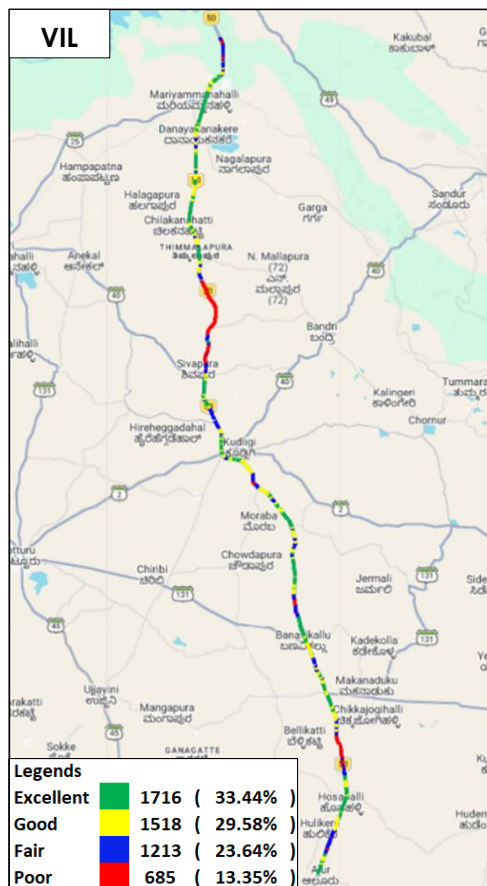


Figure-100: Signal strength 3G/2G network mode voice - VIL.

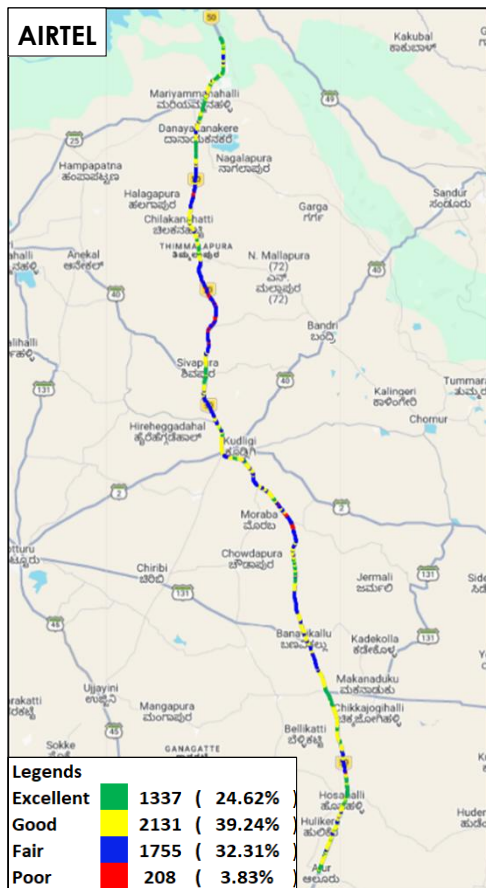


Figure-101: Signal strength auto-selection mode (5G/4G/3G/2G) voice - AIRTEL.

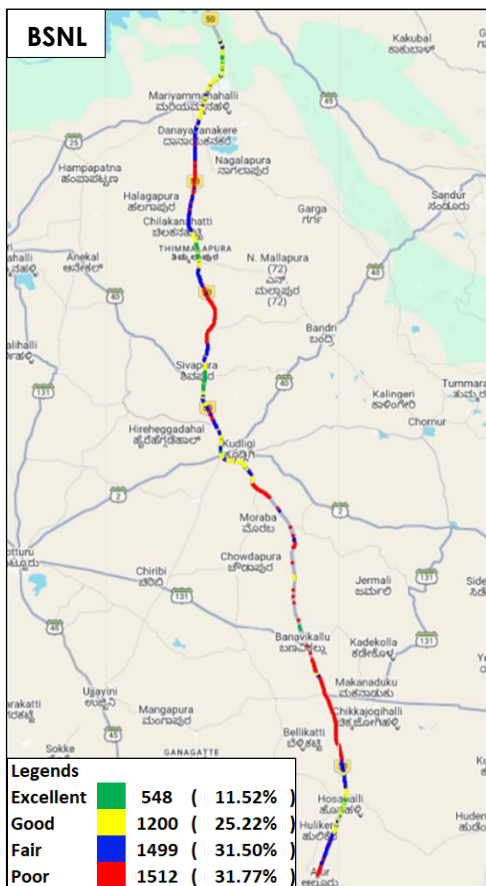


Figure-102: Signal strength auto-selection mode (5G/4G/3G/2G) voice - BSNL.

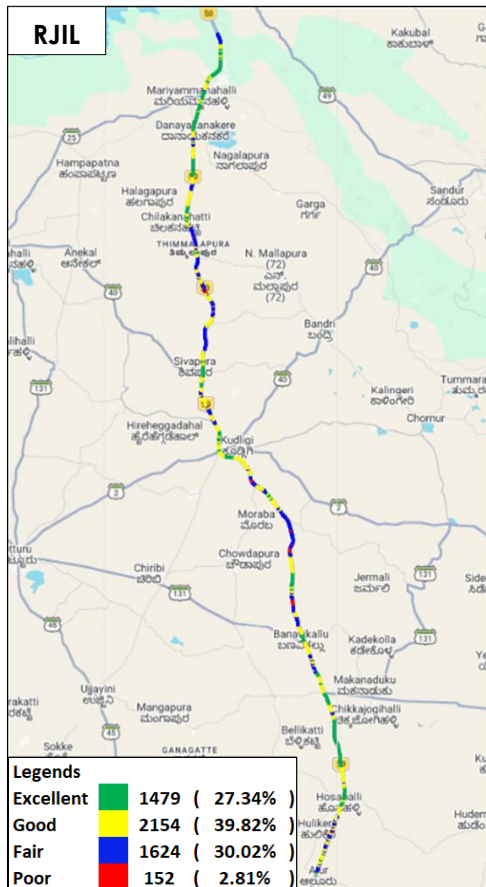


Figure-103: Signal strength auto-selection mode (5G/4G/3G/2G) voice - RJIL.

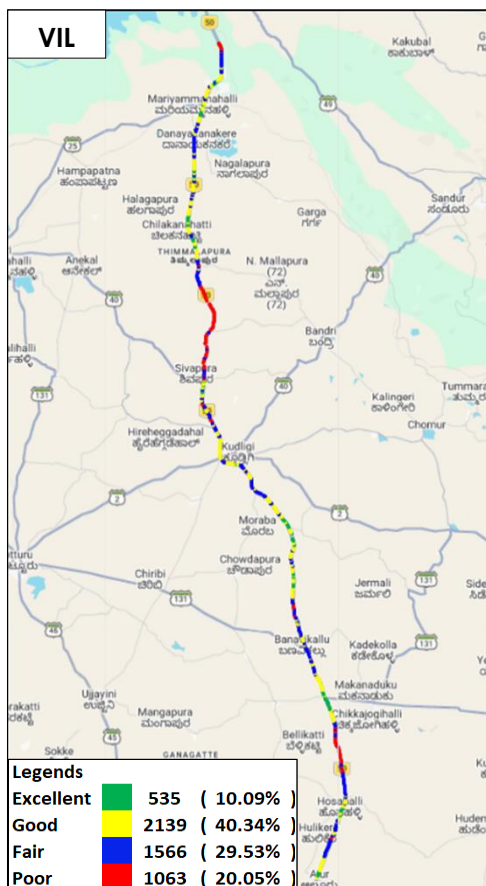


Figure-104: Signal strength auto-selection mode (5G/4G/3G/2G) voice - VIL.

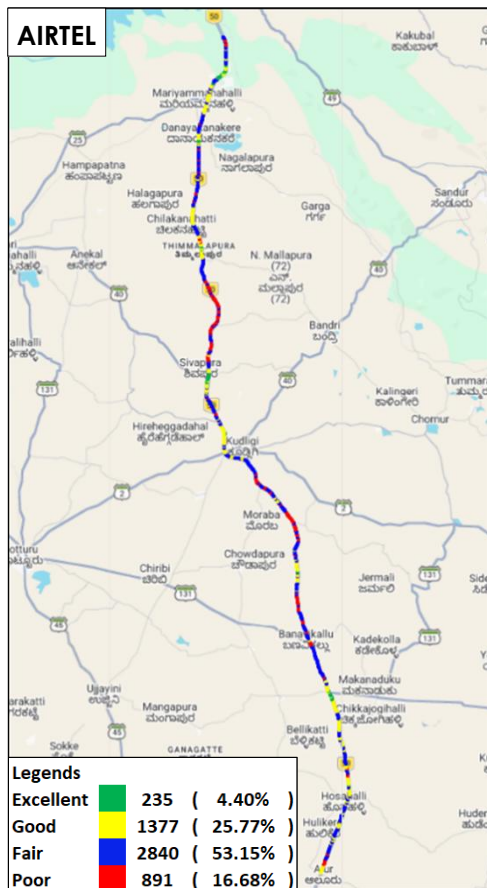


Figure-105: Signal strength auto-selection mode (5G/4G/3G/2G) data - AIRTEL.

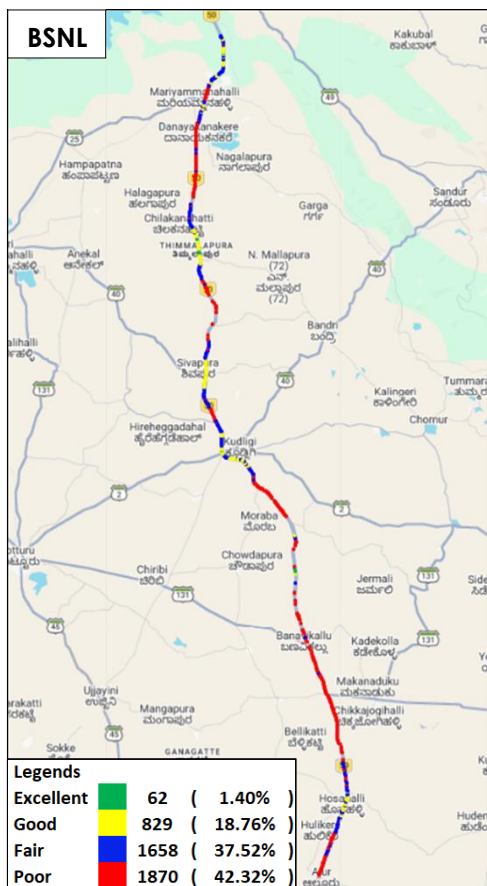


Figure-106: Signal strength auto-selection mode (5G/4G/3G/2G) data - BSNL.

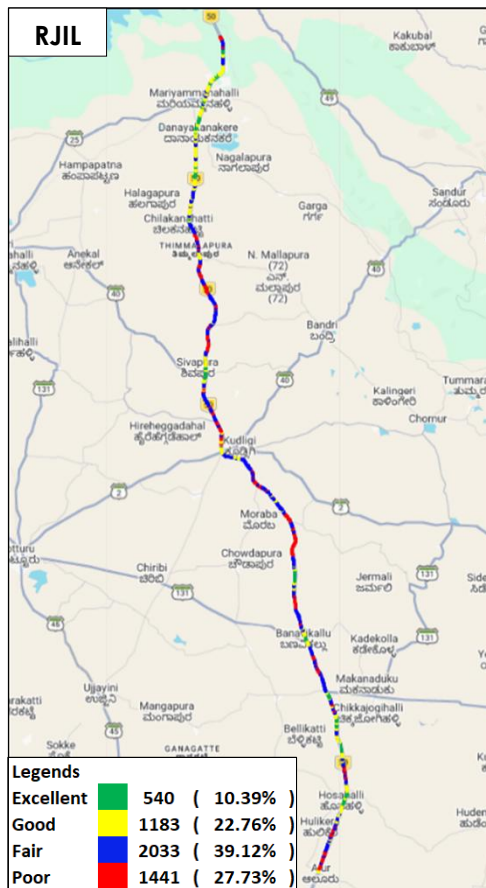


Figure-107: Signal strength auto-selection mode (5G/4G/3G/2G) data - RJIL.

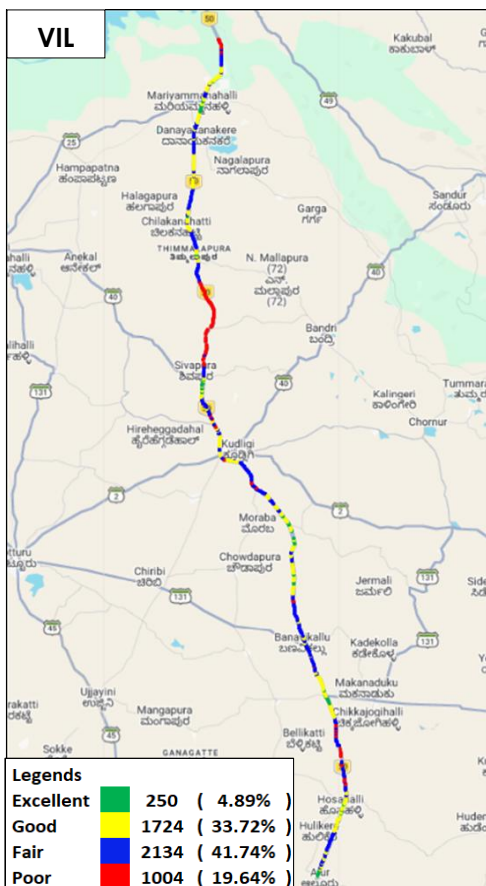


Figure-108: Signal strength auto-selection mode (5G/4G/3G/2G) data - VIL.

7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions may be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

7.1 Appendix-I

7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	• 3G/2G auto mode- switch Call • 5G/4G/3G/2G auto mode- switch Call • 5G/4G MOS Call	30 Sec
Call Duration		90/180 seconds
Wait/ Guard Time		15 Sec

Table-79: Voice test detail

Note-

- There is 15 sec wait time after locking and before starting first call in 3G/2G call.
- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.
- Speech quality (MOS) has been measured only in city drive & highway by making Mobile to Mobile call.
- 180 Sec calls were made in highway route drive.

Data Test		
Test Type	Technology	Detail
FTP/HTTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
FTP/HTTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)
Web Browsing		3 popular websites (www.google.co.in , www.irctc.co.in , www.sbi.bank.in) 20 sec timeout (only at Hotspot)

Latency & Jitter (TWAMP-UDP)		25 count- Dynamic 500 count- Hotspot Payload- 42 bytes in all drive
Packet Loss Rate (TWAMP-UDP & TCP)		500 counts (TWAMP-UDP) 500 counts (TCP) at each hotspot Payload- 42 bytes in all drive

Table-80: Data test detail

Note-

- 5 Data iteration to be done at each hotspot location.
- Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance.
- TWAMP-UDP & TCP test to be performed only once at hotspot location.
- Youtube & Web browsing test to be performed at static location only.
- All values are taken up to two decimal places with round off.
- Airtel server was used for FTP Download, FTP Upload, TCP and TWAMP testing, for Airtel
- Delhi-based TRAI server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing, for BSNL.
- RJIL server was used for FTP Download, FTP Upload, TCP and TWAMP testing, for RJIL.
- VIL server was used for HTTP Download, HTTP Upload, TCP and TWAMP testing, for VIL.

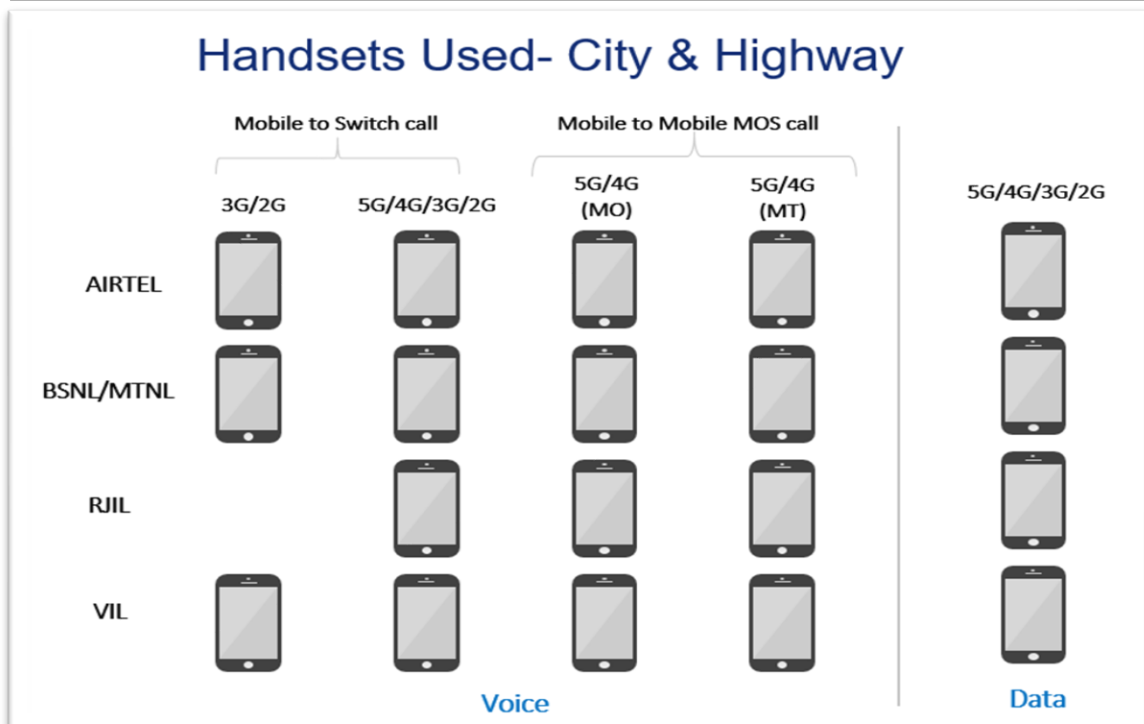


Figure-109: Number of handsets used in city & highway drive

MO: Mobile originating

MT: Mobile terminating

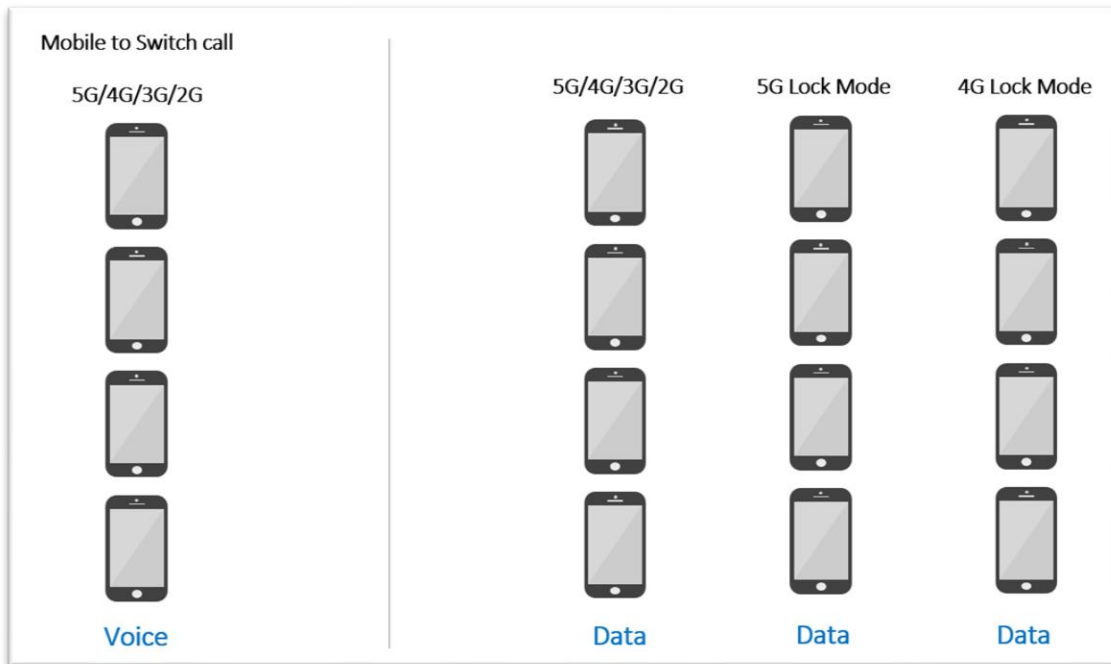


Figure-110: Number of handsets used in railway/metro/walktest/hotspot/ coastal area

Note- 5G & 4G Lock mode testing has been performed at hotspot locations only.

7.1.2 Drive test Methodology

(a) Dynamic voice testing (on the move)

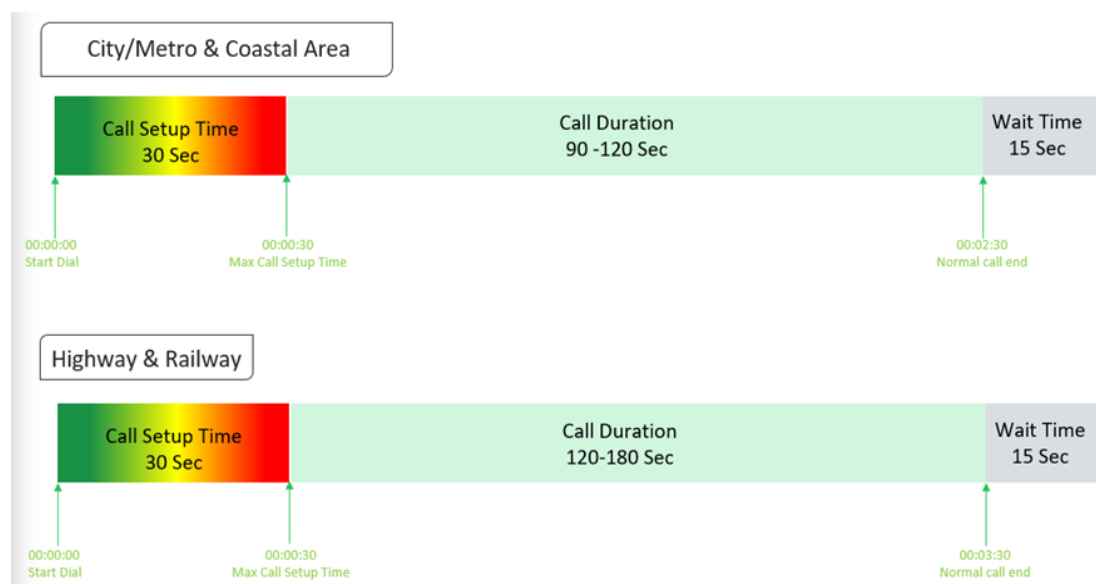


Figure-111: Voice test script for city/railway/metro/highway & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.
- Speech quality (MOS) will be measured only City & Highway drive by making Mobile to Mobile calls.

(b) Hotspot voice testing



Figure-112: Voice test script for walktest/hotspot

- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.

(c) Dynamic Data (internet) test

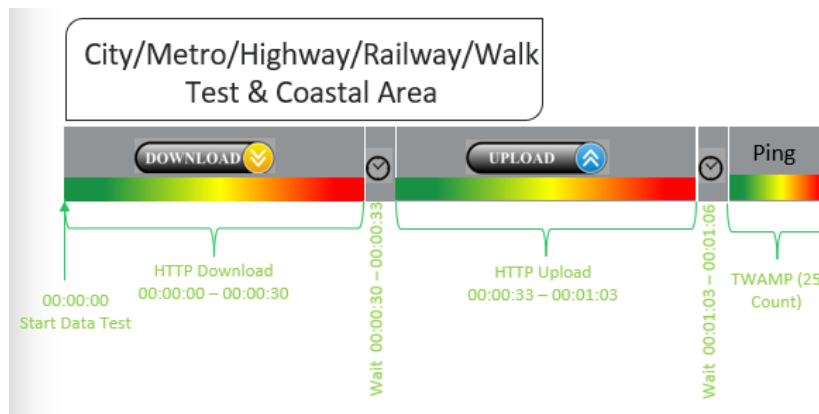


Figure-113: Data test script used in city/metro/railway/highway/walk test & coastal area

(d) Static Data(internet) testing

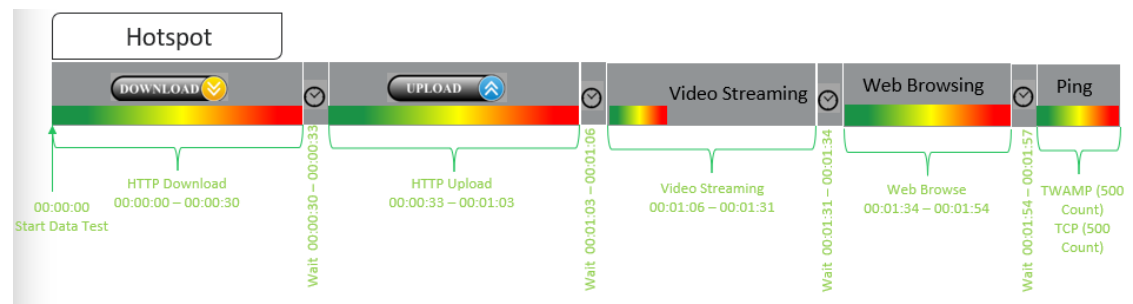


Figure-114: Data test script used at hotspot

- 5 Data iteration done at each hotspot location
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- One ping iteration (with 500 Count of each- TWAMP & TCP) done at hotspot location.

7.2 Appendix-II

7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
Call Setup Success Rate	(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup: (a) Call attempt is made (b) The signaling channel is allocated (c) The call is routed to the outwards path of the terminating network (d) An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement. CSSR = (Total Call Established/ Total Call Attempt) *100 As per QoS Regulation 2024 benchmark value is >=98%
Drop Call Rate	Call drop represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network Drop Call Rate = (Total Call Drop/Total Call Established) *100 As per QoS Regulation 2024 benchmark value is <=2%
Call Setup Time	Time taken from call initiate to call alerting/ringing. Call Setup Time = T2- T1 T2- Ringing (VoLTE/VoNR) & Alerting (for WCDMA & GSM), T1- Invite (VoLTE/VoNR) & CM Service Request (for WCDMA & GSM)
Voice Quality (MOS)	Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as: Excellent: MOS ≥ 4 and < 5 Good : MOS ≥ 3 and < 4 Fair : MOS ≥ 2 and < 3 Poor : MOS ≥ 1 and < 2
Handover Success Rate	Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100 Handover type which are considered- 2G Inter & Intra cell, 3G Soft & IRAT, 4G Inter & Intra frequency & SRVCC, 5G Inter & Intra frequency & 5G to 4G handovers.
Silence Call	A call which has ≥ 4 sec continuous RTP gap is considered as a Silence Call. Silence call rate = (count of silence call / Total calls established) *100 If a call observes multiple silence count ≥ 4 sec in a particular established call it has been taken as one silent event.

Jitter	The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If S_i is the RTP timestamp from packet i, and R_i is the time of arrival in RTP timestamps units for packet i, then for two packets i and j the inter-arrival jitter D can be expressed as: $D(i,j) = (R_j - R_i) - (S_j - S_i)$ The interarrival jitter is calculated continuously as each data packet i is received from source $SSRC_n$, using this difference D for that packet and the previous packet $i-1$ in order of arrival (not necessarily in sequence), according to the formula $J(i) = J(i-1) + (D(i-1,i) - J(i-1))/16 \text{ or } 8$																																		
Downlink Packet Drop Rate	Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE)																																		
Uplink Packet Drop Rate	Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).																																		
Signal Strength	Signal strength is the signal power level received by the wireless user. <table><tr><th rowspan="2">Parameter Name</th><th rowspan="2">Technology</th><th colspan="4">Signal Strength (dBm)</th></tr><tr><th>Excellent</th><th>Good</th><th>Fair</th><th>Poor</th></tr><tr><td>Rx Level</td><td>GSM</td><td>0 to ≥ -65</td><td><-65 to ≥ -75</td><td><-75 to ≥ -85</td><td><-85 to min</td></tr><tr><td>RSCP</td><td>WCDMA</td><td>0 to ≥ -70</td><td><-70 to ≥ -80</td><td><-80 to ≥ -90</td><td><-90 to min</td></tr><tr><td>RSRP</td><td>LTE</td><td>0 to ≥ -80</td><td><-80 to ≥ -95</td><td><-95 to ≥ -110</td><td><-110 to min</td></tr><tr><td>SS_RSRP</td><td>NR</td><td>0 to ≥ -80</td><td><-80 to ≥ -95</td><td><-95 to ≥ -110</td><td><-110 to min</td></tr></table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to ≥ -65	<-65 to ≥ -75	<-75 to ≥ -85	<-85 to min	RSCP	WCDMA	0 to ≥ -70	<-70 to ≥ -80	<-80 to ≥ -90	<-90 to min	RSRP	LTE	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min	SS_RSRP	NR	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to ≥ -65	<-65 to ≥ -75	<-75 to ≥ -85	<-85 to min																														
RSCP	WCDMA	0 to ≥ -70	<-70 to ≥ -80	<-80 to ≥ -90	<-90 to min																														
RSRP	LTE	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min																														
SS_RSRP	NR	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min																														

Table-81: Network performance parameter and definition voice

7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
Download Speed (Mbps)	The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device. Download Speed = Total bytes transferred during download / Total time for transfer 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for download throughput in dynamic drive and Hotspot combine data
Upload Speed (Mbps)	The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server. Upload Speed = Total bytes transferred during upload / Total time for transfer. 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for upload throughput in dynamic drive and Hotspot combine data.
Download Session Setup Success Rate	(total download session established (successfully connected to server)/ total download session attempt) *100. This KPI has been calculated for Hotspot only.

Upload Session Setup Success Rate	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
Web Page Download Time	Web browsing test is used to measure performance in terms of opening a web/HTTP page. Time taken to open the web page successfully is considered as web browsing delay/web page download time.
Video Streaming Delay	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
Latency (TWAMP-UDP)	Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again. The Latency is measured in milliseconds (ms). To calculate the one-way latency, we just do half of the round-trip time. 50th percentile of one-way latency has been reported.
Jitter (TWAMP-UDP)	Measure of variation in time in arrival of packets from a source to destination The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL $IPDV(i) = D(i) - D(i-1)$ then Stdvs of IPDV is considered as jitter.
Packet Loss Rate (TWAMP-UDP & TCP)	Number of packets lost out of total packet transferred during test. Packet loss rate = (Total packet lost / Total packet sent) *100 * Packet delay (using TWAMP-UDP & TCP) >90 ms considered as packet loss and included in packet loss rate. * Packet loss rate is calculated based on TWAMP-UDP & TCP. *90th percentile for Packet loss rate has been reported in overall Hotspot performance summary.

Table-82: Network performance parameter and definition Data

Disclaimer: The observations presented above and, in the reports, represent the performance of the service providers on the area/route under test on the day/time of conducting the drive test and no inference whatsoever may be drawn regarding the quality of the telecom service by the service providers in the whole city/state/licensed service area.

Hardik
Rajeshbhai
Patel

Digitally signed by
Hardik Rajeshbhai
Patel
Date: 2026.09.03
10:50:41 +05'30'