



TELECOM REGULATORY AUTHORITY OF INDIA

Independent Drive Test Report

Maharashtra LSA

November 2025

Contents

1. Introduction	3
2. Executive Summary (LSA)	3
2.1 Drive test details	3
2.2 Drive test routes	4
2.3 Summary of areas covered	4
2.4 Telecom service providers detected frequency bands	5
2.5 Performance against key QoS parameters	5
3. QoS performance analysis-LSA level.....	6
3.1 Overview.....	7
3.2 Voice performance.....	7
3.3 Data performance.....	10
4. Detailed QoS performance analysis	12
4.1 Overview.....	12
4.2 City	12
4.2.1 Drive test route.....	12
4.2.2 Areas covered	12
4.2.3 Voice performance.....	12
4.2.4 Data performance.....	19
4.3 Hotspots	21
4.3.1 Locations.....	21
4.3.2 Hotspot covered	21
4.3.3 Voice performance.....	21
4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)	24
4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)	27
4.4 Walk Test	30
4.4.1 Walk test locations	30
4.4.2 Walk Test Covered.....	30
4.4.3 Voice Performance.....	30
4.4.4 Data Performance.....	31
4.5 Highway	33
4.5.1 Drive test route.....	33
4.5.2 Routes Covered.....	33
4.5.3 Voice performance.....	33
4.5.4 Data performance.....	42

5. Voice & Data Key findings.....	43
5.1 Overall Voice.....	43
5.2 Overall Data	43
5.3 Operator wise Key Findings.....	44
6. Annexure	49
6.1 Route wise coverage map	49
6.1.1 City	49
6.1.2 Highway	52
7. Appendix	56
7.1 Appendix-I	56
7.1.1 Drive test setup	56
7.1.2 Drive test Methodology	58
7.2 Appendix-II	60
7.2.1 Network Performance Parameters for Voice calls	60
7.2.2 Network Performance Parameters Data tests	61

1. Introduction

TRAI Act, 1997 mandates the Authority to ensure the services delivered through various telecommunications networks meet the required quality standards prescribed, to protect the interest of the consumers of telecommunication services. TRAI is also responsible for conducting the periodical audit of such services provided by the service providers so as to protect the interests of the consumers of telecommunications services.

Accordingly, TRAI has engaged M/s RedMango Analytics Pvt. Ltd. to undertake assessment of Quality of Service of mobile service through Independent Drive Test (IDT).

In IDT, the performance of all service providers providing service in a Licensed Service Area (LSA) through various technologies (like 2G/ 3G/ 4G/ 5G) for voice and data are measured by conducting drive test. The drive test routes are finalised based on various objective criteria like reported network performance, consumer complaints etc. Methodology adopted for conducting IDT is elaborated in **APPENDIX-I**.

2. Executive Summary (LSA)

2.1 Drive test details

This report covers the findings of the IDT undertaken in Maharashtra License Service Area (LSA) during the month of November-2025 under the supervision of TRAI Regional Office (RO) Bengaluru. Details of route/area covered during the IDT are as given below:

S. No	Drive test route	Type of route	Distance covered (KMs)	From date	To date
1	Nashik	City	250.1	20-Nov-2025	21-Nov-2025
2	Nashik	Inter Operator Calling	1 Location	21-Nov-2025	21-Nov-2025
3	Nashik	Hotspot	9 Locations	19-Nov-2025	21-Nov-2025
4	Nashik	Walk test	9.4	18-Nov-2025	19-Nov-2025
5	Nashik-Shirdi-Chandwad-Nashik	Highway	227.7	18-Nov-2025	18-Nov-2025

Table-1: Drive test summary

2.2 Drive test routes

The map provides overview of drive test routes indicating city drive, Inter-operator call test, hotspots, walk test and highway as per the legends shown on the map.

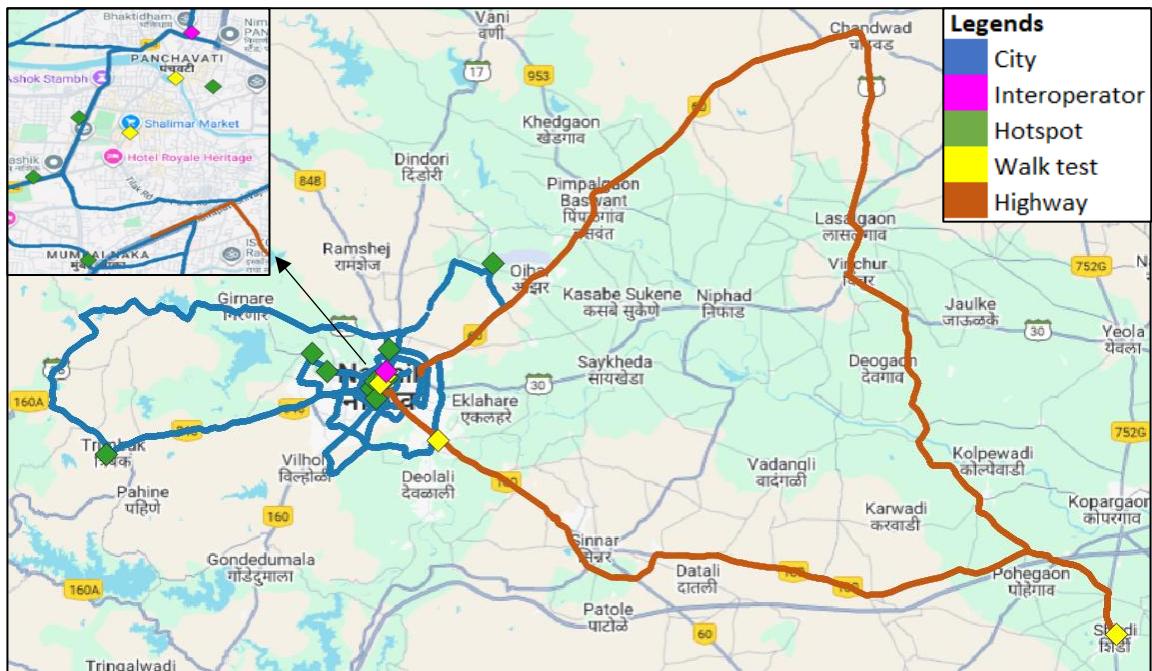


Figure-1: Drive test routes

2.3 Summary of areas covered

a) City- Nearby Nashik International Airport, Warvandi, Mhasrul Gaon, Panchvati, Girnare, Wagheda, Amboli, Trimbak, Khambale, Shivaji Nagar, Canada Corner, Mumbai Naka, Indira Nagar, Pathardi Phata, Vihitgaon, Nandur Naka, Dhatrak Phata, Amruthdham, Lokhande Mala, Adgaon, Jaulakedindori, Bhangadhwadi and Janori etc.

b) Hotspot

1. Civil Hospital
2. District Collector Office
3. Mahamarg Bus Stand
4. Nashik Airport
5. RTO Office Nashik
6. Serene Meadows, Anandvalli
7. Shri Kalaram Mandir Panchavati
8. Someshwar Waterfall
9. Trimbakeshwar Jyotirling Mandir

c) Walk Test

1. Nashik Railway Station
2. Panchwati Ghat
3. Shalimar Market
4. Shirdi Sai Baba Temple Bus Stand

d) Highway- Mahamarg Bus Stop Nashik to Amruthdham Nashik passing through Nashik Road, Gurewadi, Wavi, Derde Korhale, Shirdi, Chandekasare, Manjur, Bharwas, Lasalgaon, Chandwad, Vadalibhoi, Pimpalgaon Baswant and Adgaon etc.

2.4 Telecom service providers detected frequency bands


Technologies covered during the IDT and frequency bands in use are summarised in table below:

S.no.	Name of TSP	Technology	Frequency Bands (In MHz)
1	Bharti Airtel Ltd.	2G	1800
2	Bharti Airtel Ltd.	4G	850,1800,2100,2300
3	Bharti Airtel Ltd.	5G	3500
4	BSNL	2G	900
5	BSNL	3G	2100
6	BSNL	4G	700,2100,2500
7	Reliance JIO Infocomm Ltd.	4G	850,1800,2300
8	Reliance JIO Infocomm Ltd.	5G	700,3500
9	Vodafone Idea Ltd.	2G	900,1800
10	Vodafone Idea Ltd.	4G	900,1800,2100,2300,2500
11	Vodafone Idea Ltd.	5G	3500

Table-2: Telecom service provider (TSP) covered in IDT

2.5 Performance against key QoS parameters

CSSR: Call Setup Success Rate (in %), **CST:** Call Setup Time (in seconds), **DCR:** Drop Call Rate (in %) & **MOS:** Mean Opinion Score.

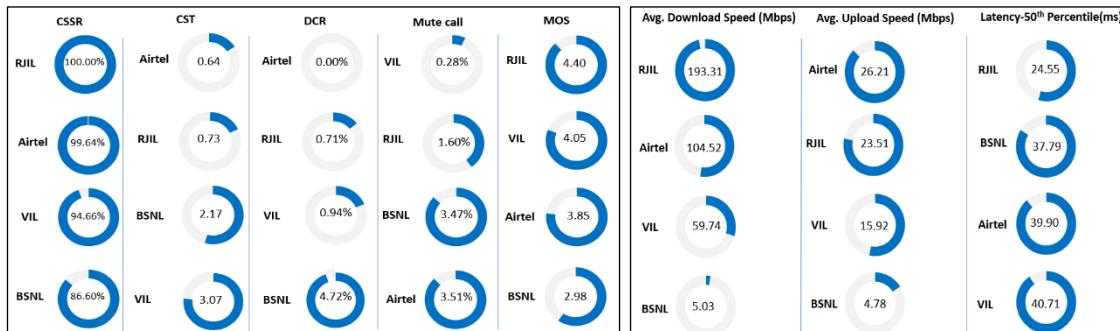

Summary-Voice services

Call Setup Success Rate: Airtel, BSNL, RJIL and VIL have 99.64%, 86.60%, 100.00% and 94.66% call setup success rate respectively in Auto-selection mode (5G/4G/3G/2G).

Call Setup Time: Airtel, BSNL, RJIL and VIL have call setup time of 0.64, 2.17, 0.73 and 3.07 seconds respectively in Auto-selection mode (5G/4G/3G/2G).

Drop Call Rate: Airtel, BSNL, RJIL and VIL have drop call rate of 0.00%, 4.72%, 0.71% and 0.94% respectively in Auto-selection mode (5G/4G/3G/2G).

Call Silence/Mute Rate: Airtel, BSNL, RJIL and VIL have silence call rate of 3.51%, 3.47%, 1.60% and 0.28% respectively in packet switched network (4G/5G).

Mean Opinion Score (MOS): Airtel, BSNL, RJIL and VIL have average MOS of 3.85, 2.98, 4.40 and 4.05 respectively.

Summary-Data services

Data Download performance (Overall): Average download speed of Airtel (5G/4G/2G) is 104.52 Mbps, BSNL (4G/3G/2G) is 5.03 Mbps, RJIL (5G/4G) is 193.31 Mbps and VIL (5G/4G/2G) is 59.74 Mbps.

Data Upload performance (Overall): Average upload speed of Airtel (5G/4G/2G) is 26.21 Mbps, BSNL (4G/3G/2G) is 4.78 Mbps, RJIL (5G/4G) is 23.51 Mbps and VIL (5G/4G/2G) is 15.92 Mbps.

Latency (Overall): Airtel, BSNL, RJIL and VIL 50th percentile latency is 39.90 ms, 37.79 ms, 24.55 ms & 40.71 ms respectively.

Data performance - Hotspots (in Mbps):

Airtel- 4G D/L: 33.55	4G U/L: 4.93
5G D/L: 117.96	5G U/L: 28.24
BSNL- 4G D/L: 7.58	4G U/L: 9.66
RJIL- 4G D/L: 20.81	4G U/L: 6.33
5G D/L: 155.69	5G U/L: 22.30
VIL- 4G D/L: 43.82	4G U/L: 9.07
5G D/L: 130.49	5G U/L: 20.76

Note- "D/L" Download speed, "U/L" Upload speed

- Poor signal strength level has been observed on 6.42%, 13.39%, 5.04% & 25.98% of the route covered during the drive test for Airtel, BSNL, VIL and RJio correspondingly for city drive.
- Poor signal strength level has been observed on 2.47%, 27.26%, 2.40% & 32.39% of the route covered during the drive test for Airtel, BSNL, VIL and RJio correspondingly for highway drive.

QoS Performance Analysis- Maharashtra LSA

3. QoS performance analysis-LSA level

3.1 Overview

This section provides summary of overall QoS performance of the telecom service provider's network in the LSA by aggregating the results of drive tests conducted in the Maharashtra LSA during the month of November-2025 covering city drive, hotspots, walk test and highway. (Refer Table 1)

3.2 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	370	405	386
Call Setup Success Rate %	98.38	90.62	95.34
Drop Call Rate %	0.55	5.72	1.09
Call Setup Time-Average (Second)	4.79	3.74	3.14
Handover Success Rate %	98.92	99.48	94.91

Table-3: Summary of voice call performance in 3G/2G network mode only.

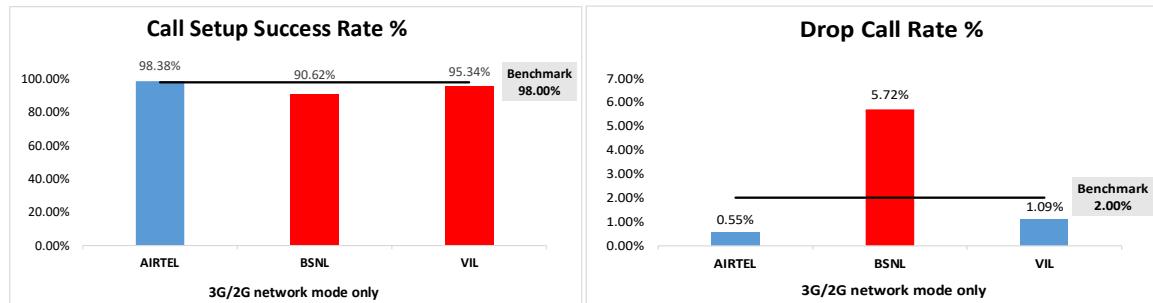


Figure-2: Call setup success rate and drop call rate performance.

Technology	Number of unique cell Id's covered in Voice test- Technology wise		
	Service Provider		
	3G/2G network mode only		
3G	AIRTEL	BSNL	VIL
2G	NA	171	NA
	582	145	551

Table-4: Technology wise number of network cell Id's latched during drive test.

Note-

- RJIL does not have 3G/2G network.
- NA- Service provider doesn't provide services in respective technology.

(b) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	561	612	560	562
Call Setup Success Rate %	99.64	86.60	100.00	94.66
Drop Call Rate %	0.00	4.72	0.71	0.94
Call Setup Time-Average (Second)	0.64	2.17	0.73	3.07
Handover Success Rate %	99.94	99.30	99.82	98.16

Table-5: Summary of voice call performance in network auto-selection mode.

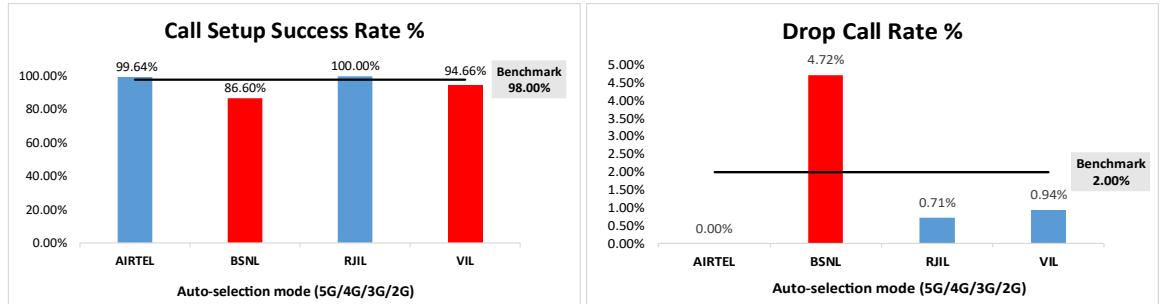


Figure-3: Performance for call setup success rate and drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	370	403	374	353
Number of silences call for >4 Sec	13	14	6	1
Silence Call Rate %	3.51	3.47	1.60	0.28
Number of silence instances for >4 Sec	20	23	6	1
Number of silence instances for >3 Sec	35	35	8	1
Number of silence instances for >2 sec	66	59	22	8
RTP Jitter (4G & 5G) in ms	6.17	8.08	16.05	7.92
Packet loss Rate Downlink %	1.93	5.01	1.32	0.55
Packet loss Rate Uplink %	1.05	4.32	0.93	0.48

Table-6: Summary of silence instances & packet loss rate for mobile to mobile calls.

Technology	Number of unique cell Id's covered in Voice test- Technology wise			
	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
Technology	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	530	0
4G	1280	447	1178	517
3G	NA	66	NA	NA
2G	0	72	NA	549

Table-7: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

(c) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicates quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile-to-mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls table-6	2566	2266	2558	2548
Speech Quality (Average MOS)	3.85	2.98	4.40	4.05
Number of samples with MOS >=4 to <5 (Excellent)	1917	570	2160	1948
Number of samples with MOS >=3 to <4 (Good)	444	593	240	507
Number of samples with MOS >=2 to <3 (Fair)	83	665	75	60
Number of samples with MOS >=1 to <2 (Poor)	122	438	83	33
%age of samples with MOS >=4 to <5 (Excellent)	74.71%	25.15%	84.44%	76.45%
%age of samples with MOS >=3 to <4 (Good)	17.30%	26.17%	9.38%	19.90%
%age of samples with MOS >=2 to <3 (Fair)	3.23%	29.35%	2.93%	2.35%
%age of samples with MOS >=1 to <2 (Poor)	4.75%	19.33%	3.24%	1.30%

Table-8: Summary of speech quality (MOS) samples.

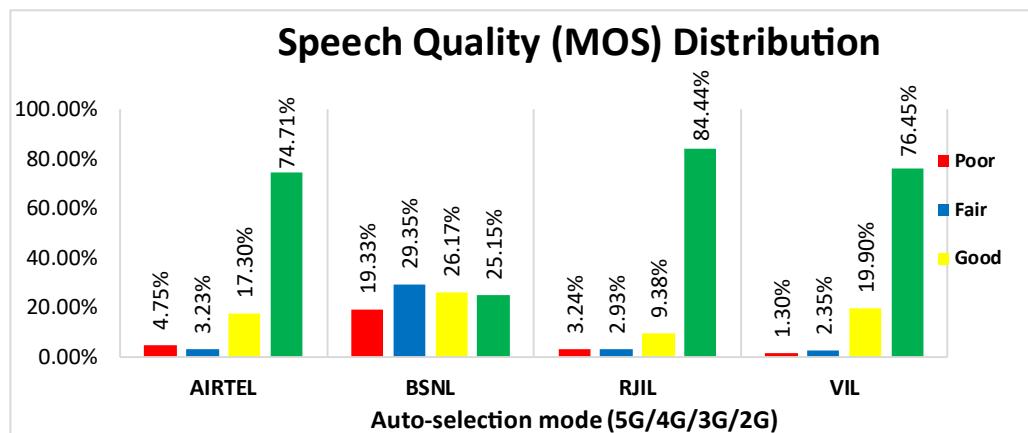


Figure- 4: Distribution of samples in MOS range.

(d) Inter-service provider voice call performance: To check the performance of inter-service providers call setup success rate, total 12 to 14 inter operator calls were attempted at one location which is Bhaktidham Temple. The call setup success rate and call setup time observation is as below.

From Service Provider	Call Setup Success Rate %			
	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	100.00	92.86	100.00
BSNL	100.00	NA	100.00	100.00
RJIL	100.00	100.00	NA	100.00
VIL	100.00	100.00	100.00	NA

Table-9: Call setup success rate across service providers

Note-

- NA- Only inter-operator calls were measured during test.

Call setup time average (seconds)				
From Service Provider	To Service Provider			
	AIRTEL	BSNL	RJIL	VIL
AIRTEL	NA	3.15	1.04	2.14
BSNL	2.41	NA	1.64	2.35
RJIL	1.56	1.57	NA	4.48
VIL	1.93	2.13	3.68	NA

Table-10: Call setup time across service providers.

Note-

- NA- Only inter-operator calls were measured during test.

3.3 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	104.52	5.03	193.31	59.74
	80th Percentile	178.40	7.69	335.17	91.90
	20th Percentile	24.17	1.23	40.38	11.71
Upload Throughput (Mbits/s)	Average	26.21	4.78	23.51	15.92
	80th Percentile	44.69	9.57	43.96	26.37
	20th Percentile	6.26	1.38	3.90	3.89
Latency (ms)	50th Percentile	39.90	37.79	24.55	40.71

Table-11: Summary of data performance in network auto-selection mode.

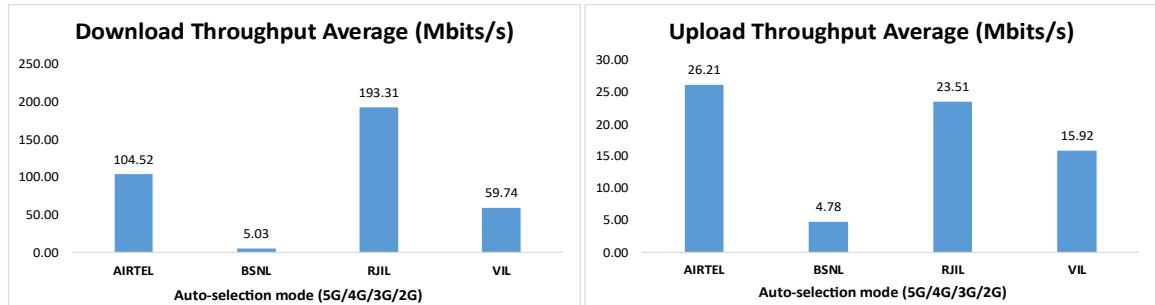


Figure- 5: Download and Upload throughput

Technology	Number of unique cell Id's covered in Data test- Technology wise			
	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
5G	AIRTEL	BSNL	RJIL	VIL
5G	0	NA	739	0
4G	1243	279	510	1025
3G	NA	150	NA	NA
2G	9	23	NA	7

Table-12: Technology wise number of network cell Id's latched during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.
- 0- No cell Id's were found in respective technology.

Detailed QoS Performance Analysis

4. Detailed QoS performance analysis

4.1 Overview

This section covers analysis on performance of various categories of drives like city, hotspots, walk test and highway for all telecom service providers, the results of drive tests conducted are shown individually for respective areas/locations.

4.2 City

Drive test has been conducted on 20th November 2025 and 21st November 2025 in Nashik city. (Refer Table-1)

4.2.1 Drive test route

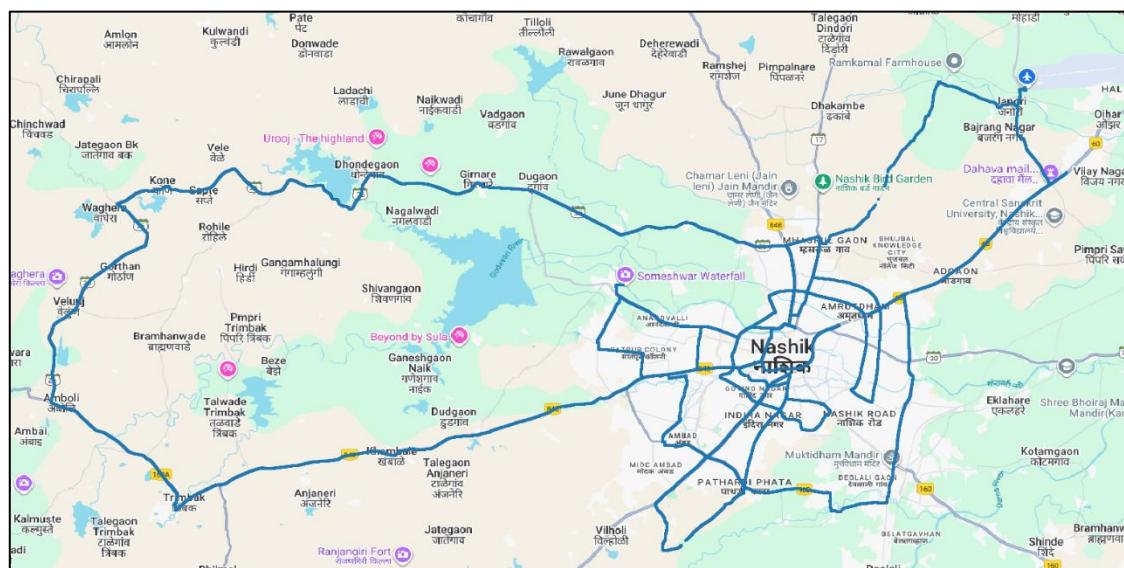


Figure- 6: Drive test routes

4.2.2 Areas covered

Nearby Nashik International Airport, Warvandi, Mhasrul Gaon, Panchvati, Girnare, Waghera, Amboli, Trimbak, Khambale, Shivaji Nagar, Canada Corner, Mumbai Naka, Indira Nagar, Pathardi Phata, Vihatgaon, Nandur Naka, Dhatrak Phata, Amrutedham, Lokhande Mala, Adgaon, Jaulakedindori, Bhangadhwadi and Janori etc.

4.2.3 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	283	299	297
Call Setup Success Rate %	97.88	92.64	94.61
Drop Call Rate %	0.36	2.17	1.42
Call Setup Time-Average (Second)	4.77	3.70	3.19
Handover Success Rate %	99.10	99.50	95.76

Table-13: Summary of voice call performance in 3G/2G network mode only.

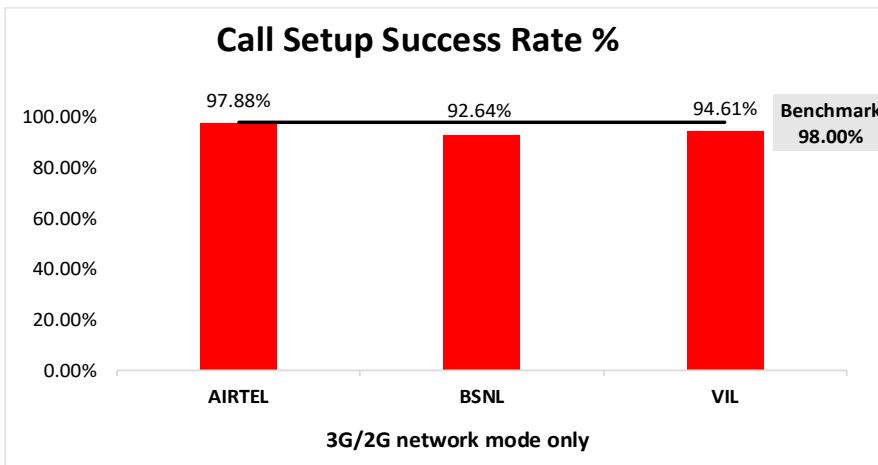


Figure-7: Performance for call setup success rate.

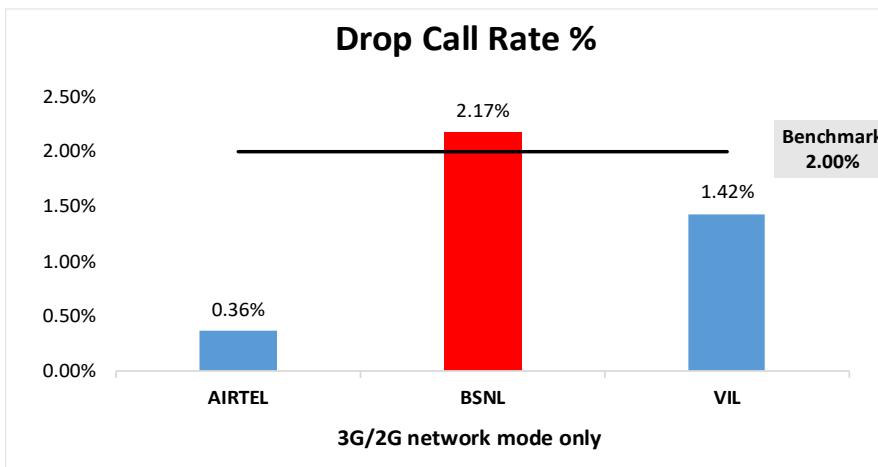


Figure-8: Performance for drop call rate.

(b) Network Technology: This section represent time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	65.65%	NA
2G	99.80%	32.53%	99.49%
Limited Service	0.20%	1.82%	0.51%

Table-14: Time spent on technology during drive test 3G/2G network mode.

Note-

- NA- Service provider doesn't provide services in respective technology.

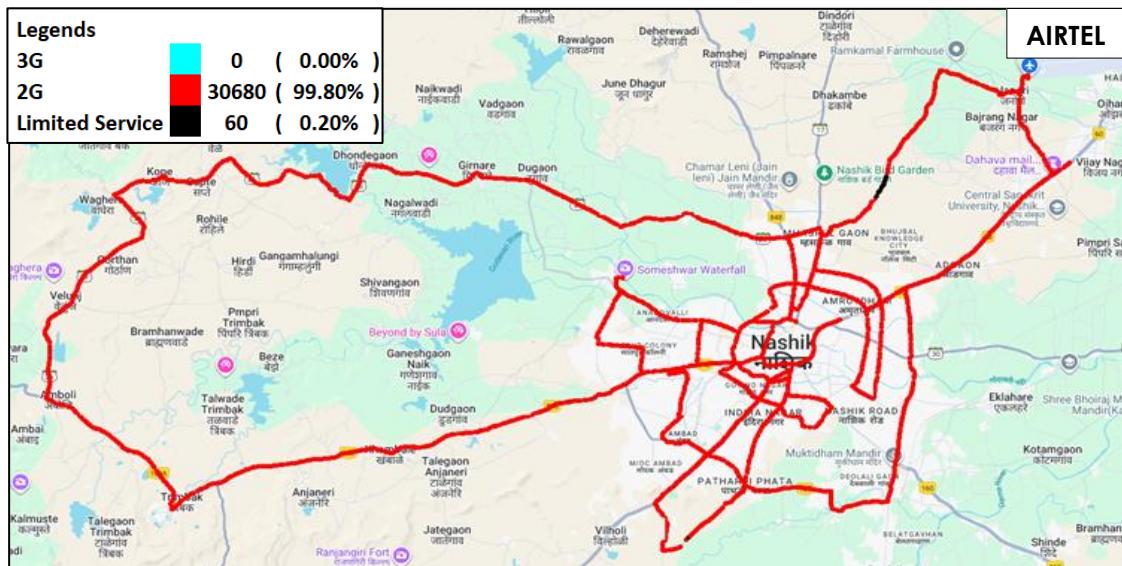


Figure-9: Serving technology plots 3G/2G network mode – AIRTEL

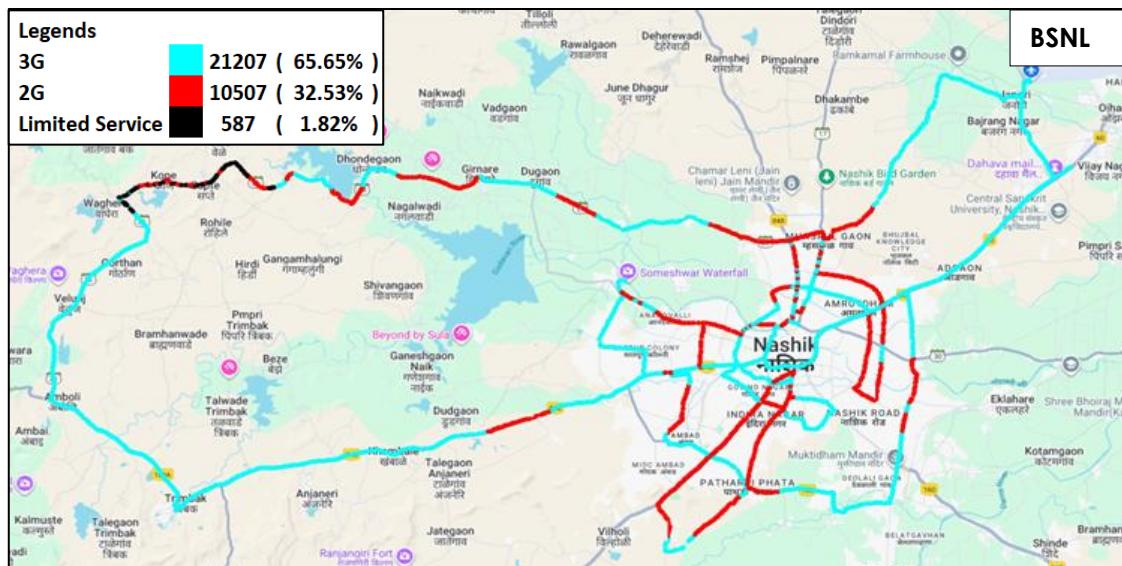


Figure-10: Serving technology plots 3G/2G network mode – BSNL.

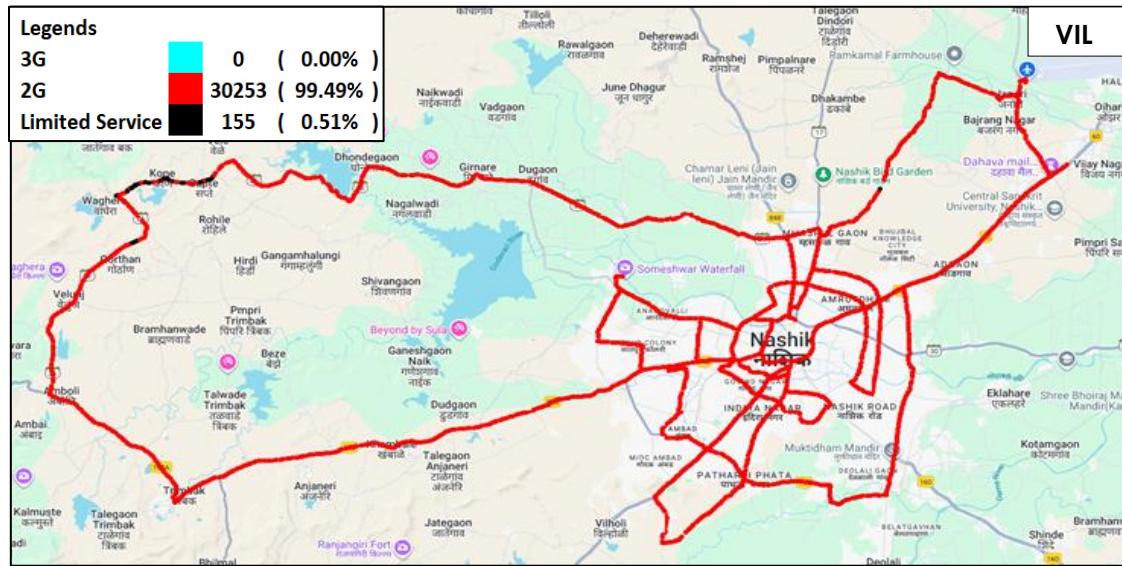


Figure-11: Serving technology plots 3G/2G network mode – VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure- 42, 43 & 44 for map view)

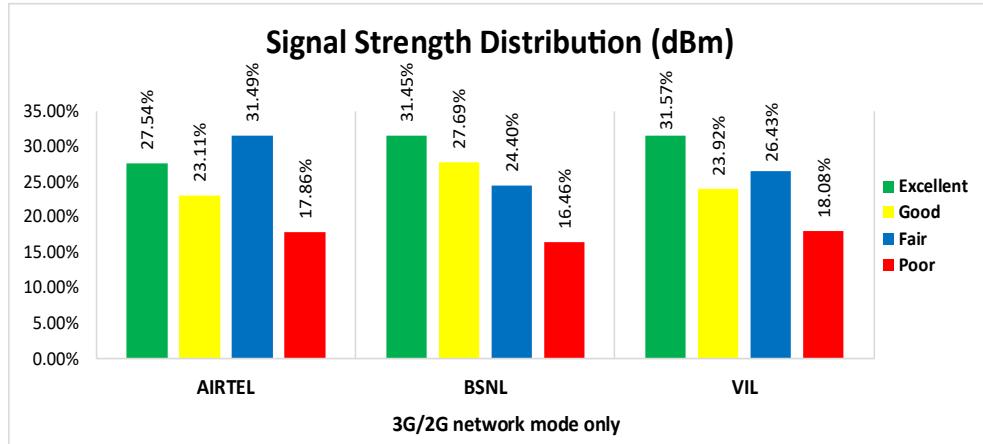


Figure-12: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 28% of samples falling in the excellent signal strength category.
- BSNL has 31% of samples falling in the excellent signal strength category.
- VIL has 32% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	303	324	302	307
Call Setup Success Rate %	99.67	86.73	100.00	90.88
Drop Call Rate %	0.00	5.34	0.99	1.43
Call Setup Time Average (Second)	0.67	2.49	0.79	3.17
Handover Success Rate %	100.00	99.03	99.81	97.31

Table-15: Summary of voice call performance in network auto-selection mode.

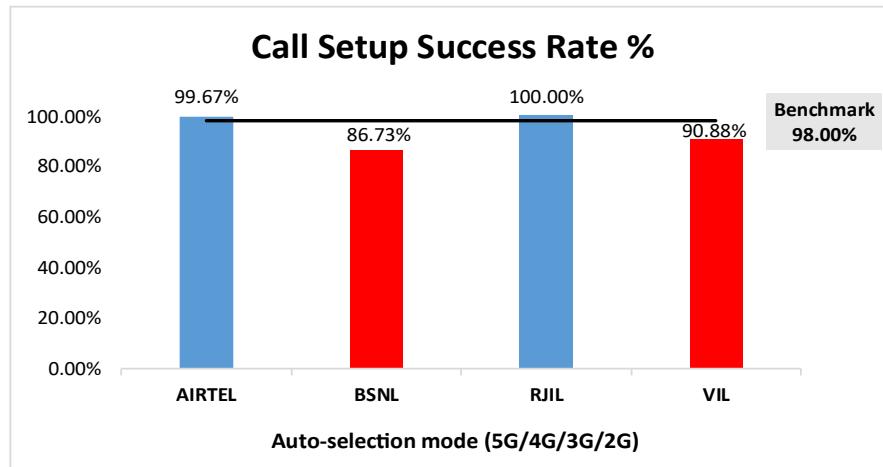


Figure-13: Performance for call setup success rate.

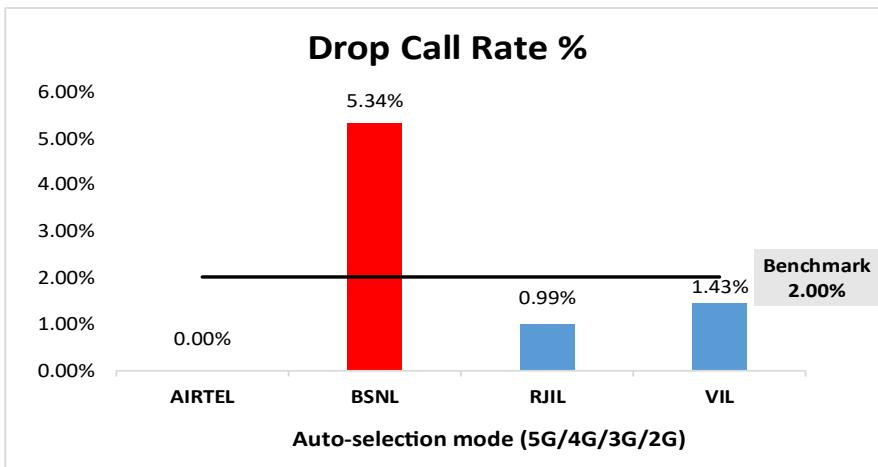


Figure-14: Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	295	292	297	277
Number of silences call for >4 Sec	9	10	5	1
Silence Call Rate %	3.05	3.42	1.68	0.36
Number of silence instances for >4 Sec	10	18	5	1
Number of silence instances for >3 Sec	18	30	7	1
Number of silence instances for >2 sec	28	48	17	5
RTP Jitter (4G & 5G) in ms	6.48	8.23	16.39	7.93
Packet loss Rate Downlink %	1.75	4.75	1.38	0.58
Packet loss Rate Uplink %	0.75	3.27	0.94	0.51

Table-16: Summary of silence instances & packet loss rate for mobile to mobile call.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS value means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-16	1646	1396	1641	1610
Speech Quality (Average MOS)	3.87	3.17	4.39	4.06
Number of samples with MOS >=4 to <5 (Excellent)	1238	486	1376	1223
Number of samples with MOS >=3 to <4 (Good)	290	381	165	333
Number of samples with MOS >=2 to <3 (Fair)	48	285	49	36
Number of samples with MOS >=1 to <2 (Poor)	70	244	51	18
%age of samples with MOS >=4 to <5 (Excellent)	75.21%	34.81%	83.85%	75.96%
%age of samples with MOS >=3 to <4 (Good)	17.62%	27.29%	10.05%	20.68%
%age of samples with MOS >=2 to <3 (Fair)	2.92%	20.42%	2.99%	2.24%
%age of samples with MOS >=1 to <2 (Poor)	4.25%	17.48%	3.11%	1.12%

Table-17: Summary of speech quality (MOS) samples.

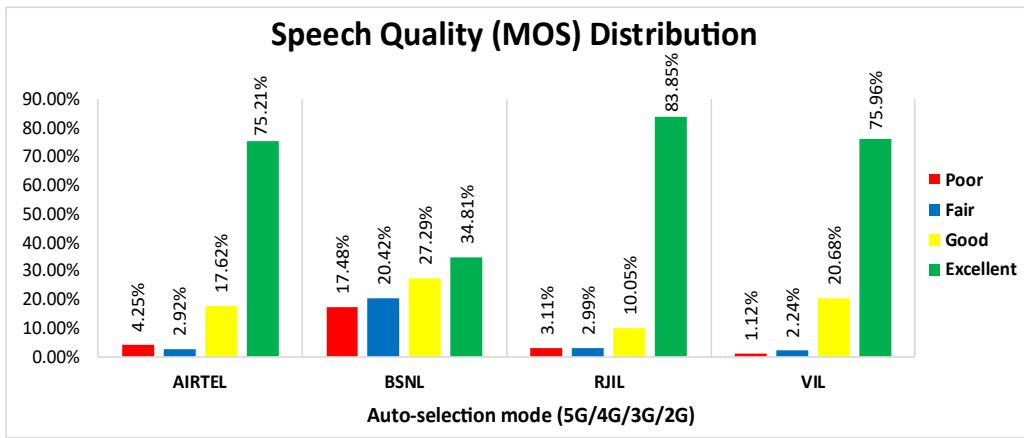


Figure-15: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	8.93%	NA	54.79%	0.41%
4G	91.06%	59.96%	45.21%	18.66%
3G	NA	29.90%	NA	NA
2G	0.00%	7.44%	NA	79.74%
Limited Service	0.01%	2.69%	0.00%	1.19%

Table-18: Time spent on technology during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.

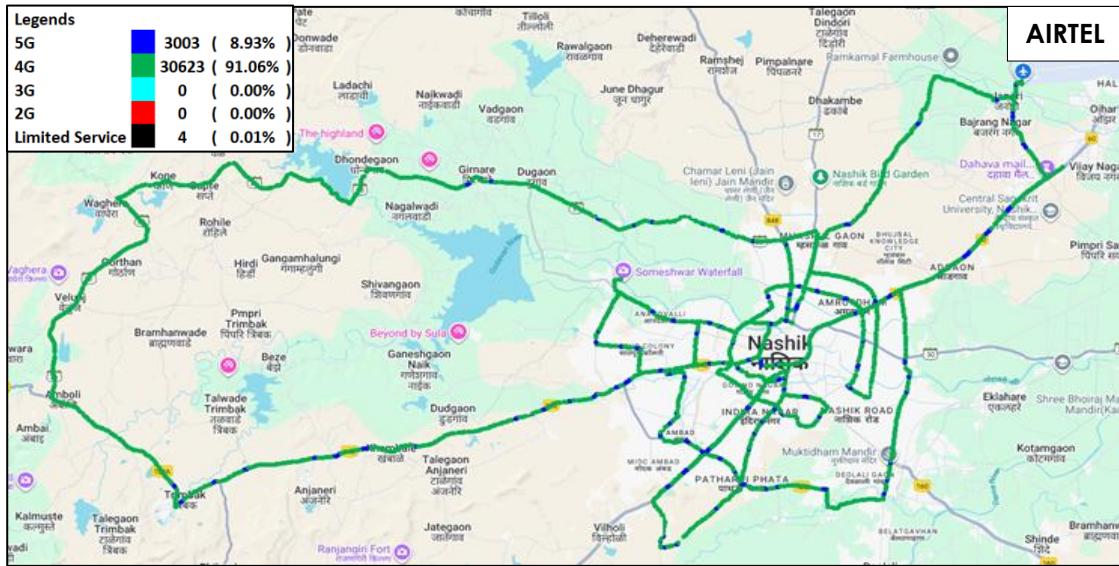


Figure-16: Serving technology plots in auto-selection mode (5G/4G/3G/2G) -AIRTEL.

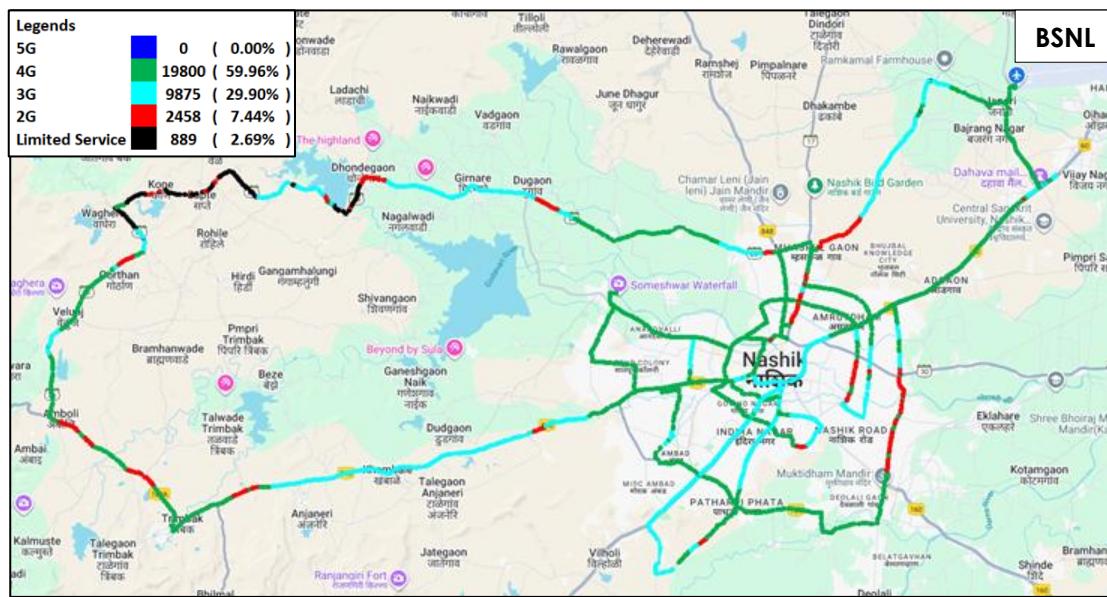


Figure-17: Serving technology plots in auto-selection mode (5G/4G/3G/2G) -BSNL.

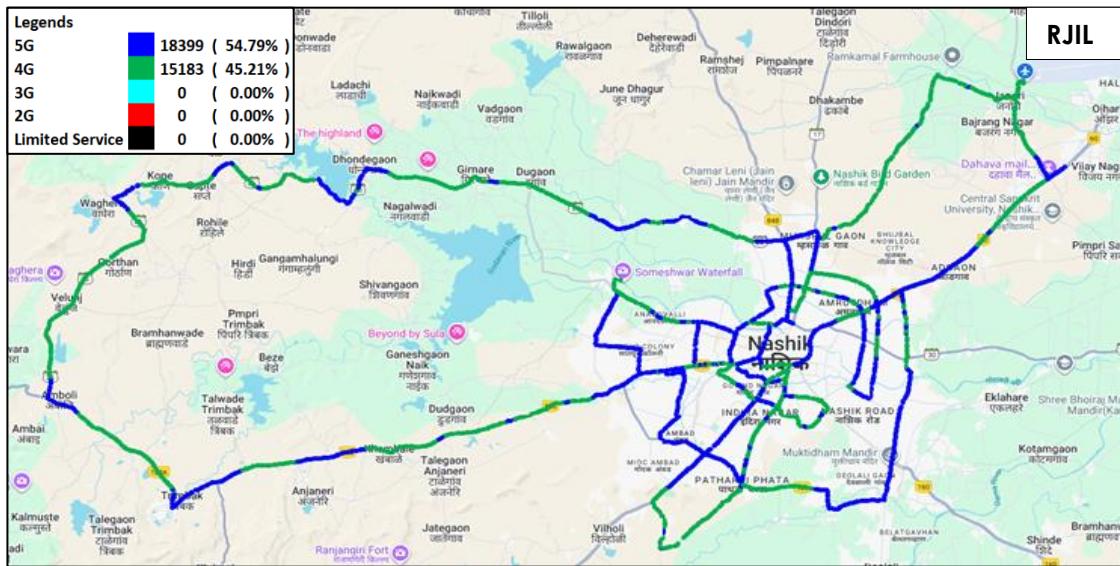


Figure-18: Serving technology plots in auto-selection mode (5G/4G/3G/2G)- RJIL.

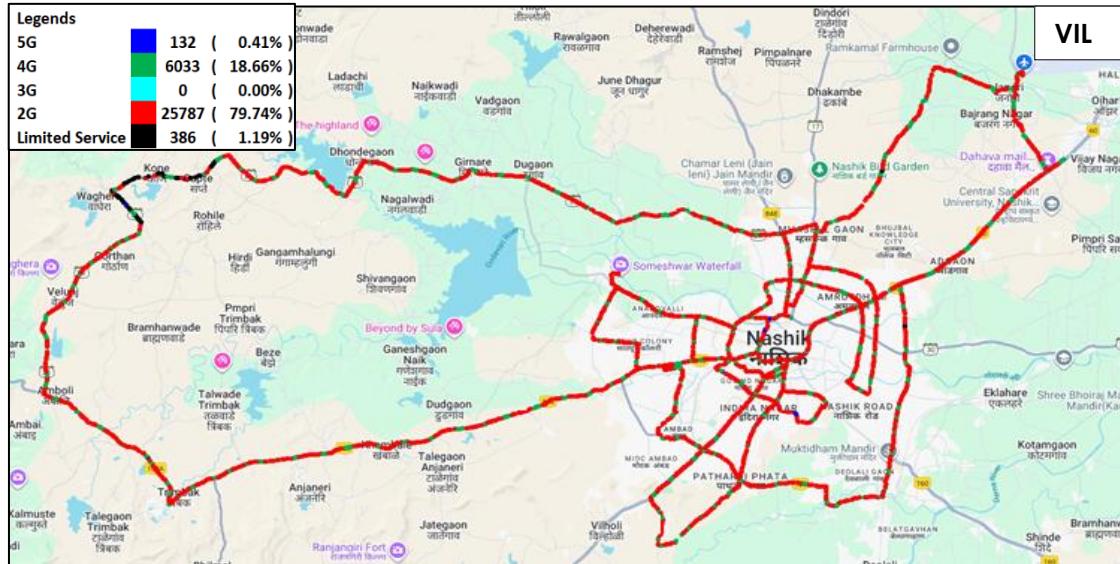


Figure-19: Serving technology plots in auto-selection mode (5G/4G/3G/2G) – VIL

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G). (Refer figure-45, 46, 47 & 48 for map view)

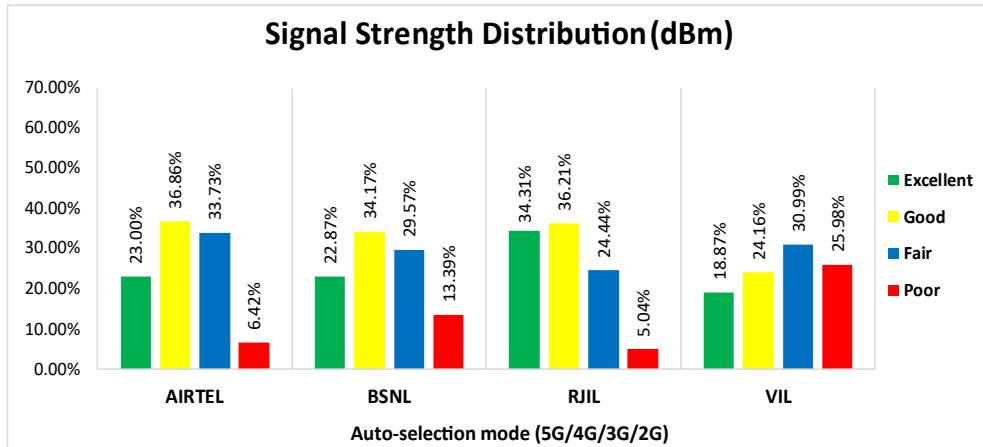


Figure-20: Signal strength distribution auto-selection mode 5G/4G/3G/2G.

Observations:

- Airtel has 23% of samples falling in the excellent signal strength category.
- BSNL has 23% of samples falling in the excellent signal strength category.
- RJIL has 34% of samples falling in the excellent signal strength category.
- VIL has 19% of samples falling in the excellent signal strength category.

4.2.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters	Service Provider				
	Auto-selection mode (5G/4G/3G/2G)				
	AIRTEL	BSNL	RJIL	VIL	
Download Throughput (Mbits/s)	Average	107.90	4.45	199.46	59.64
	80th Percentile	178.40	6.61	344.39	91.54
	20th Percentile	29.63	1.12	41.39	12.42
Upload Throughput (Mbits/s)	Average	26.88	3.20	22.42	15.79
	80th Percentile	48.15	3.60	41.58	25.49
	20th Percentile	5.55	1.24	3.55	4.46
Latency (ms)	50th Percentile	36.90	38.24	23.34	40.71

Table-19: Summary of Data performance in network auto-selection mode.

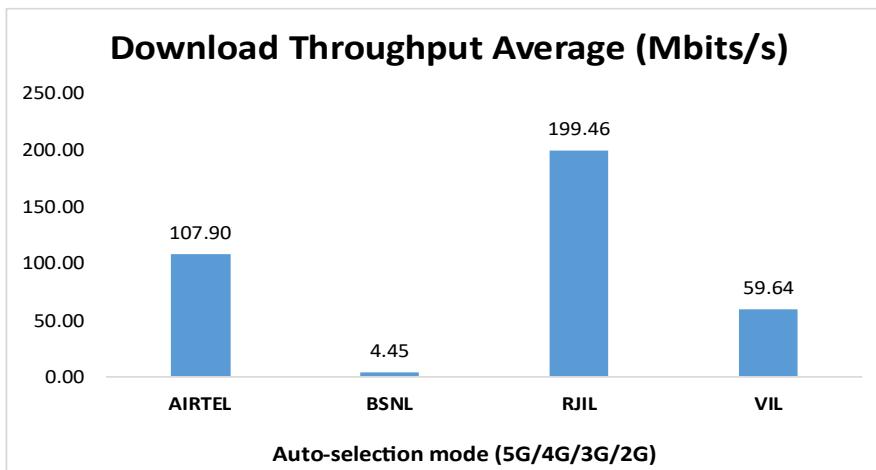


Figure- 21: Download throughput

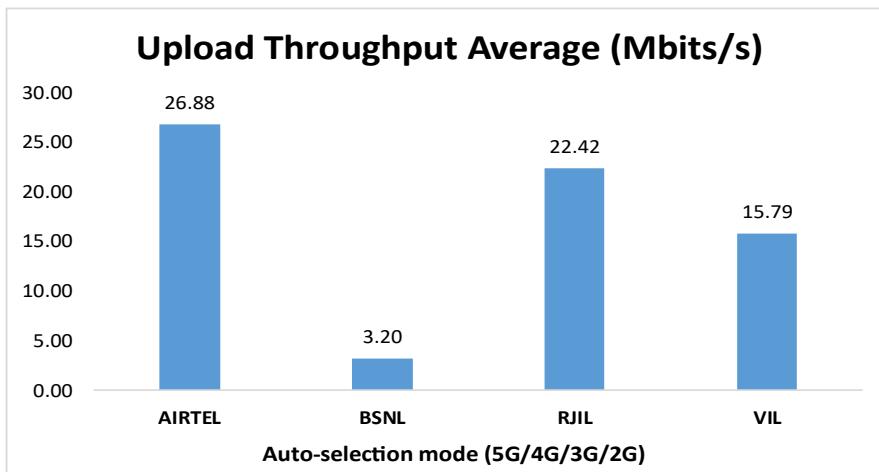


Figure- 22: Upload throughput

4.3 Hotspots

Hotspot testing has been done from 19th November 2025 to 21st November 2025. Nine locations have been tested in the city.

4.3.1 Locations

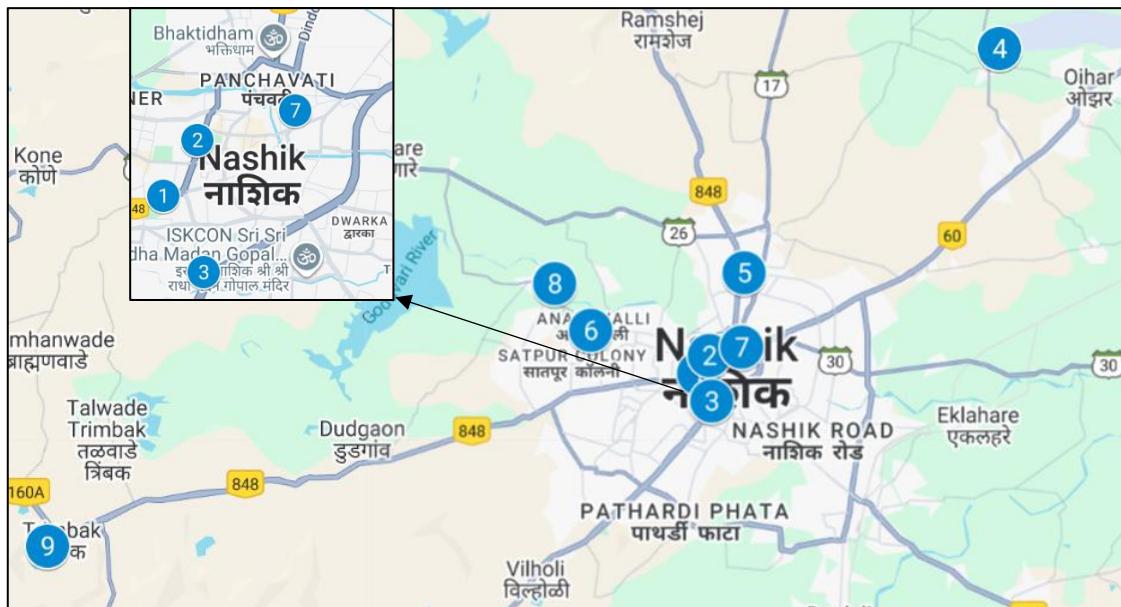


Figure- 23: Hotspot locations

4.3.2 Hotspot covered

1. Civil Hospital
2. District Collector Office
3. Mahamarg Bus Stand
4. Nashik Airport
5. RTO Office Nashik
6. Serene Meadows, Anandvalli
7. Shri Kalaram Mandir Panchavati
8. Someshwar Waterfall
9. Trimbakeshwar Jyotirling Mandir

4.3.3 Voice performance

Parameters	Overall Voice Performance			
	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	90	90	90	90
Call Setup Success Rate %	100.00	98.89	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.67	1.58	0.55	2.74

Table-20: Overall summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Civil Hospital				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	90.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.63	2.16	0.51	2.69

Table-21: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

District Collector Office				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.56	1.41	0.58	1.82

Table-22: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Mahamarg Bus Stand				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	1.21	1.50	0.45	2.90

Table-23: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Nashik Airport				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.53	1.39	0.55	2.90

Table-24: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

RTO Office Nashik				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.58	2.86	0.55	2.96

Table-25: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Serene Meadows, Anandvalli				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.54	1.19	0.51	3.00

Table-26: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Shri Kalaram Mandir Panchavati				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.55	1.21	0.48	2.96

Table-27: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Someshwar Waterfall				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.81	1.16	0.63	2.67

Table-28: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

Trimbakeshwar Jyotirling Mandir				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	10	10	10	10
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.60	1.40	0.69	2.74

Table-29: Summary of voice call performance in network auto-selection mode(5G/4G/3G/2G)

4.3.4 Data performance (Auto-selection mode 5G/4G/3G/2G)

Overall Data Performance				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	87.91	7.28	163.05	91.72
Download Throughput 80th Percentile (Mbit/s)	204.90	8.97	268.18	151.94
Download Throughput 20th Percentile (Mbit/s)	3.92	3.00	25.17	17.60
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	23.84	8.63	23.66	19.59
Upload Throughput 80th Percentile (Mbit/s)	43.79	13.14	43.58	29.43
Upload Throughput 20th Percentile (Mbit/s)	3.25	4.52	1.71	7.54
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	4.13	5.69	4.07	2.97
Youtube Initial Buffer Delay (Second)	1.50	2.53	1.06	2.12
Latency (ms) - 50th Percentile	40.81	36.52	25.71	40.20
Jitter (ms)	12.38	19.05	17.89	17.34
Packet Loss Rate%	12.72	6.72	6.74	13.54
Packet Loss Rate- 90th percentile	29.24	6.66	8.68	36.44

Table-30: Overall Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Civil Hospital				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	227.08	1.96	320.62	203.12
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	40.69	1.53	40.02	31.74
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	8.29	7.50	4.89	1.83
Youtube Initial Buffer Delay (Second)	3.45	8.37	0.58	0.78
Latency (ms) - 50th Percentile	58.41	39.16	25.50	37.08
Jitter (ms)	8.96	18.99	5.58	15.15
Packet Loss Rate%	2.10	4.40	0.00	1.40

Table-31: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

District Collector Office				
Parameters	Service Provider			
	Auto-Selection Mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	23.53	9.31	126.03	246.02
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	2.58	6.76	7.27	33.19
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Web Browsing Delay (Second)	2.75	4.23	2.19	1.80
Youtube Initial Buffer Delay (Second)	3.32	1.63	0.83	0.90
Latency (ms) - 50th Percentile	78.64	58.14	500.06	50.20
Jitter (ms)	21.05	3.54	36.42	95.49
Packet Loss Rate%	32.20	1.00	48.60	13.50

Table-32: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Mahamarg Bus Stand					
Parameters	Service Provider				
	Auto-Selection Mode (5G/4G/3G/2G)				
	AIRTEL	BSNL	RJIL	VIL	
Download Throughput Average (Mbits/s)	1.49	5.71	327.81	121.88	
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Upload Throughput Average (Mbits/s)	6.74	12.34	71.04	7.74	
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Web Browsing Delay (Second)	3.89	3.50	1.93	5.59	
Youtube Initial Buffer Delay (Second)	1.03	2.11	0.65	4.18	
Latency (ms) - 50th Percentile	30.13	35.10	24.60	40.44	
Jitter (ms)	6.83	25.04	4.60	5.49	
Packet Loss Rate%	2.40	1.20	0.10	49.80	

Table-33: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Nashik Airport					
Parameters	Service Provider				
	Auto-Selection Mode (5G/4G/3G/2G)				
	AIRTEL	BSNL	RJIL	VIL	
Download Throughput Average (Mbits/s)	228.19	14.61	76.24	9.93	
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Upload Throughput Average (Mbits/s)	20.49	9.79	3.78	6.18	
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Web Browsing Delay (Second)	1.63	4.48	2.52	2.80	
Youtube Initial Buffer Delay (Second)	0.91	1.04	1.23	2.93	
Latency (ms) - 50th Percentile	29.70	31.58	29.77	40.23	
Jitter (ms)	8.99	19.77	6.99	7.38	
Packet Loss Rate%	0.70	1.50	0.00	4.50	

Table-34: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

RTO Office Nashik					
Parameters	Service Provider				
	Auto-Selection Mode (5G/4G/3G/2G)				
	AIRTEL	BSNL	RJIL	VIL	
Download Throughput Average (Mbits/s)	26.74	2.43	134.66	46.11	
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00	
Upload Throughput Average (Mbits/s)	41.74	2.55	16.17	26.51	
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Web Browsing Delay (Second)	1.66	4.65	2.06	2.19	
Youtube Initial Buffer Delay (Second)	0.69	5.40	0.53	0.74	
Latency (ms)- 50th Percentile	34.82	36.01	19.36	36.80	
Jitter (ms)	2.89	47.39	3.02	6.83	
Packet Loss Rate%	42.30	45.00	0.00	37.50	

Table-35: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Serene Meadows, Anandvalli					
Parameters	Service Provider				
	Auto-Selection Mode (5G/4G/3G/2G)				
	AIRTEL	BSNL	RJIL	VIL	
Download Throughput Average (Mbits/s)	66.65	7.25	15.25	64.54	
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Upload Throughput Average (Mbits/s)	7.05	6.27	1.64	20.99	
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Web Browsing Delay (Second)	5.28	7.43	13.66	1.80	
Youtube Initial Buffer Delay (Second)	0.86	1.06	10.63	1.70	
Latency (ms) - 50th Percentile	59.40	32.97	28.99	37.84	
Jitter (ms)	11.47	22.55	36.02	6.89	
Packet Loss Rate%	6.30	1.80	6.30	0.60	

Table-36: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Shri Kalaram Mandir Panchavati					
Parameters	Service Provider				
	Auto-Selection Mode (5G/4G/3G/2G)				
	AIRTEL	BSNL	RJIL	VIL	
Download Throughput Average (Mbits/s)	37.64	9.77	217.69	84.18	
Download Session Setup Success Rate%	100.00	100.00	100.00	100.00	
Upload Throughput Average (Mbits/s)	8.66	14.26	48.25	16.44	
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Web Browsing Delay (Second)	1.60	2.69	1.68	1.31	
Youtube Initial Buffer Delay (Second)	1.07	1.08	0.87	0.85	
Latency (ms)- 50th Percentile	43.36	38.60	18.14	46.07	
Jitter (ms)	37.80	9.59	11.09	6.45	
Packet Loss Rate%	16.80	0.80	0.20	0.10	

Table-37: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Someshwar Waterfall					
Parameters	Service Provider				
	Auto-Selection Mode (5G/4G/3G/2G)				
	AIRTEL	BSNL	RJIL	VIL	
Download Throughput Average (Mbits/s)	2.14	7.42	6.45	48.58	
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Upload Throughput Average (Mbits/s)	0.55	6.26	1.15	10.93	
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Web Browsing Delay (Second)	14.25	8.26	14.13	5.38	
Youtube Initial Buffer Delay (Second)	-	3.29	-	0.75	
Latency (ms) - 50th Percentile	38.65	35.32	47.88	39.95	
Jitter (ms)	8.00	7.77	55.22	7.06	
Packet Loss Rate%	11.60	3.40	5.50	1.60	

Table-38: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Note- “-” “Youtube & Ping tests were failed.

Trimbakeshwar Jyotirling Mandir					
Parameters	Service Provider				
	Auto-Selection Mode (5G/4G/3G/2G)				
	AIRTEL	BSNL	RJIL	VIL	
Download Throughput Average (Mbits/s)	177.72	7.08	242.66	1.16	
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Upload Throughput Average (Mbits/s)	64.05	13.66	23.66	22.59	
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00	
Web Browsing Delay (Second)	5.62	6.96	3.43	3.29	
Youtube Initial Buffer Delay (Second)	1.95	1.13	0.79	6.30	
Latency (ms) - 50th Percentile	41.75	38.49	21.00	39.70	
Jitter (ms)	5.34	16.69	2.40	6.06	
Packet Loss Rate%	0.10	1.40	0.00	12.90	

Table-39: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.3.5 Data performance (5G Only & 4G Only Download & Upload Speed)

Overall Data Performance					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	117.96	-	155.69	130.49
	Upload Throughput Average (Mbits/s)	28.24	-	22.30	20.76
4G	Download Throughput Average (Mbits/s)	33.55	7.58	20.81	43.82
	Upload Throughput Average (Mbits/s)	4.93	9.66	6.33	9.07

Table-40: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

Civil Hospital					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	241.22	-	331.60	160.29
	Upload Throughput Average (Mbits/s)	33.03	-	35.40	24.67
4G	Download Throughput Average (Mbits/s)	69.55	3.33	38.82	51.08
	Upload Throughput Average (Mbits/s)	5.07	5.99	9.59	18.49

Table-41: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

District Collector Office					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbits/s)	22.08	-	119.39	246.23
	Upload Throughput Average (Mbits/s)	3.35	-	8.14	35.28
4G	Download Throughput Average (Mbits/s)	24.80	10.29	17.51	4.64
	Upload Throughput Average (Mbits/s)	2.86	8.15	4.91	0.75

Table-42: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "--Respective technology was not observed during the test.

Mahamarg Bus Stand					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbps)	1.39	-	297.64	78.98
	Upload Throughput Average (Mbps)	10.05	-	24.37	1.95
4G	Download Throughput Average (Mbps)	1.43	5.61	12.89	102.50
	Upload Throughput Average (Mbps)	1.17	12.81	4.50	3.71

Table-43: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Nashik Airport					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbps)	231.25	-	28.74	-
	Upload Throughput Average (Mbps)	17.00	-	3.42	-
4G	Download Throughput Average (Mbps)	41.13	24.71	10.00	43.55
	Upload Throughput Average (Mbps)	3.10	13.80	1.62	8.86

Table-44: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

RTO Office Nashik					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbps)	28.99	-	87.90	-
	Upload Throughput Average (Mbps)	31.24	-	15.75	-
4G	Download Throughput Average (Mbps)	23.09	0.67	19.71	63.66
	Upload Throughput Average (Mbps)	4.87	1.43	4.97	5.96

Table-45: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Serene Meadows, Anandvalli					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbps)	-	-	14.85	73.67
	Upload Throughput Average (Mbps)	-	-	-	2.29
4G	Download Throughput Average (Mbps)	48.37	6.04	57.48	70.72
	Upload Throughput Average (Mbps)	6.37	11.88	9.25	16.55

Table-46: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Shri Kalaram Mandir Panchavati					
Parameters		Service Provider			
		AIRTEL	BSNL	RJIL	VIL
5G	Download Throughput Average (Mbps)	-	-	220.55	81.94
	Upload Throughput Average (Mbps)	-	-	39.22	24.74
4G	Download Throughput Average (Mbps)	15.83	6.50	13.73	11.83
	Upload Throughput Average (Mbps)	4.74	13.47	11.64	0.35

Table-47: Overall Summary of 5G only & 4G only data download & upload speed.

Note- “-”Respective technology was not observed during the test.

Someshwar Waterfall						
Parameters		Service Provider				
		AIRTEL	BSNL	RJIL	VIL	
5G	Download Throughput Average (Mbits/s)	35.62	-	1.38	-	
	Upload Throughput Average (Mbits/s)	-	-	-	-	
4G	Download Throughput Average (Mbits/s)	6.37	5.59	3.70	45.00	
	Upload Throughput Average (Mbits/s)	2.39	5.24	0.53	10.63	

Table-48: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

Trimbakeshwar Jyotirling Mandir						
Parameters		Service Provider				
		AIRTEL	BSNL	RJIL	VIL	
5G	Download Throughput Average (Mbits/s)	215.79	-	299.15	-	
	Upload Throughput Average (Mbits/s)	74.78	-	29.84	-	
4G	Download Throughput Average (Mbits/s)	71.35	5.25	13.42	1.40	
	Upload Throughput Average (Mbits/s)	13.79	13.32	5.29	4.39	

Table-49: Overall Summary of 5G only & 4G only data download & upload speed.

Note- "-"Respective technology was not observed during the test.

4.4 Walk Test

Walk Test has been conducted on 18th November 2025 and 19th November 2025. Four locations have been tested in the city.

4.4.1 Walk test locations

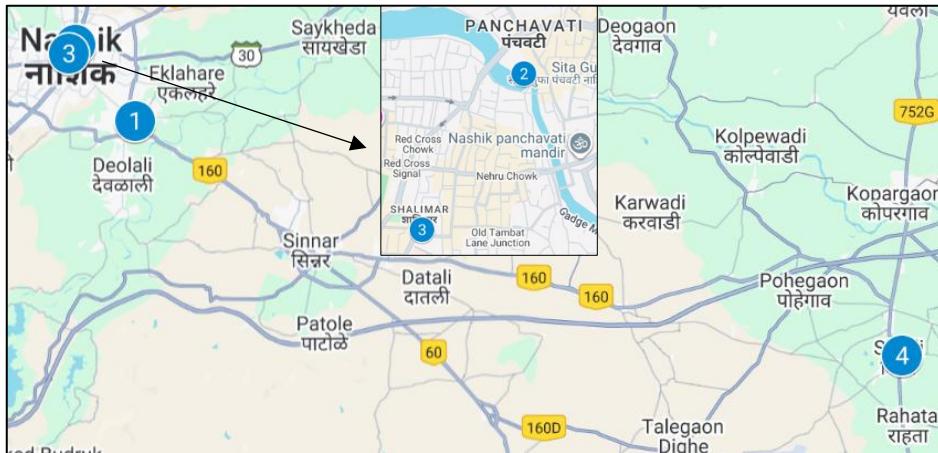


Figure-24: Walk Test locations.

4.4.2 Walk Test Covered

1. Nashik Railway Station
2. Panchwati Ghat
3. Shalimar Market
4. Shirdi Sai Baba Temple Bus Stand

4.4.3 Voice Performance

Nashik Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	24	26	24	23
Call Setup Success Rate %	100.00	80.77	100.00	100.00
Drop Call Rate %	0.00	9.52	0.00	0.00
Call Setup Time-Average (Second)	0.50	1.40	0.58	3.12

Table-50: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Panchwati Ghat				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	17	20	17	17
Call Setup Success Rate %	100.00	85.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.57	1.93	0.61	2.99

Table-51: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Shalimar Market				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	17	18	17	17
Call Setup Success Rate %	100.00	88.89	100.00	94.12
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.60	3.00	0.45	2.96

Table-52: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

Shirdi Sai Baba Temple Bus Stand				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempt	20	20	20	20
Call Setup Success Rate %	100.00	100.00	100.00	100.00
Drop Call Rate %	0.00	0.00	0.00	0.00
Call Setup Time-Average (Second)	0.57	1.27	0.60	3.32

Table-53: Summary of voice call performance in network auto-selection mode (5G/4G/3G/2G).

4.4.4 Data Performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Nashik Railway Station				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	59.41	6.48	116.30	47.87
Download Session Setup Success Rate %	100.00	95.24	100.00	100.00
Upload Throughput Average (Mbits/s)	20.24	9.69	42.34	22.17
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	48.07	33.43	26.29	39.37

Table-54: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Panchwati Ghat				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	57.30	5.96	202.29	121.19
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	37.72	7.60	31.12	47.03
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	48.08	37.07	23.84	41.26

Table-55: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Shalimar Market				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	34.42	4.64	262.27	77.81
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	18.70	7.81	35.10	11.86
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	54.15	38.11	21.90	54.84

Table-56: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

Shirdi Sai Baba Temple Bus Stand				
Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Download Throughput Average (Mbits/s)	236.63	8.13	104.14	21.87
Download Session Setup Success Rate %	100.00	100.00	100.00	100.00
Upload Throughput Average (Mbits/s)	42.34	11.43	10.69	4.82
Upload Session Setup Success Rate %	100.00	100.00	100.00	100.00
Latency (ms) - 50th Percentile	32.06	37.41	34.80	54.08

Table-57: Summary of Data performance in network auto-selection mode (5G/4G/3G/2G).

4.5 Highway

Drive test has been conducted on 18th November 2025 covering one Highway route. (Refer Table-1)

4.5.1 Drive test route

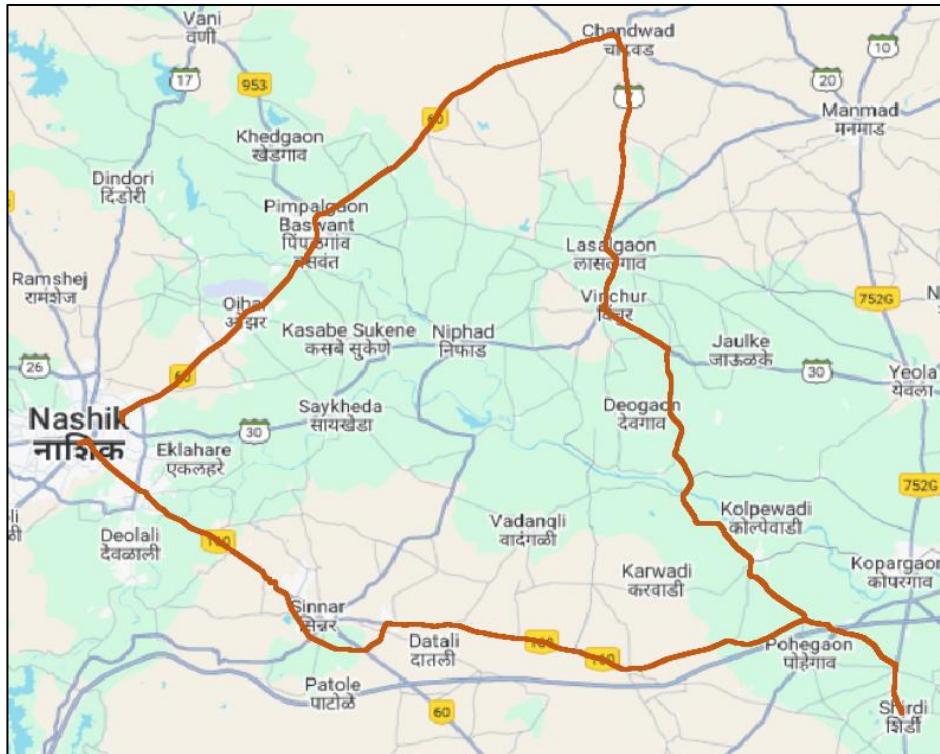


Figure-25: Drive test route Highway.

4.5.2 Routes Covered

Mahamarg Bus Stop Nashik to Amruttadham Nashik passing through Nashik Road, Gurewadi, Wavi, Derde Korhale, Shirdi, Chandekasare, Manjur, Bharwas, Lasalgaon, Chandwad, Vadalibhoi, Pimpalgaon Baswant and Adgaon etc.

4.5.3 Voice performance

(a) Voice Call Performance in 3G/2G network mode only: 3G/2G network mode testing has been done to reflect the experience for respective users as they have only 3G/2G compatible handsets.

Parameters	Service Provider		
	3G/2G network mode only		
	AIRTEL	BSNL	VIL
Call Attempts	87	106	89
Call Setup Success Rate %	100.00	84.91	97.75
Drop Call Rate %	1.15	16.67	0.00
Call Setup Time-Average (Second)	4.82	3.87	3.00
Handover Success Rate %	98.56	99.43	92.99

Table-58: Summary of voice call performance in 3G/2G network mode only.

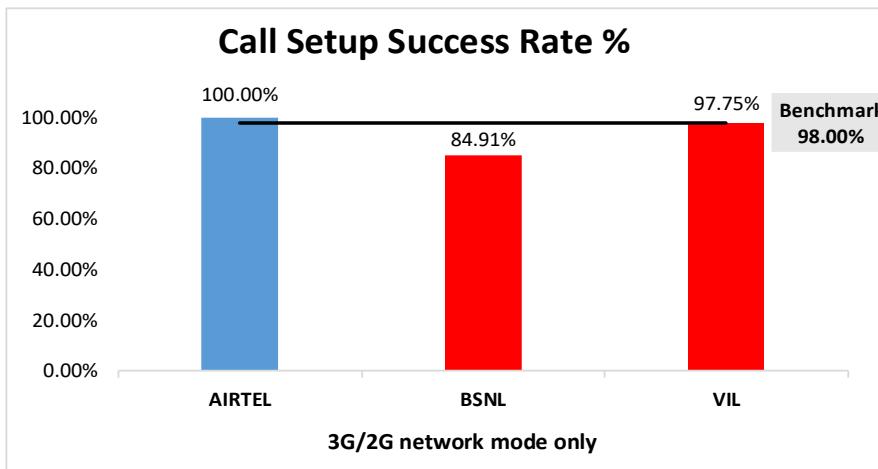


Figure-26: Performance for call setup success rate.

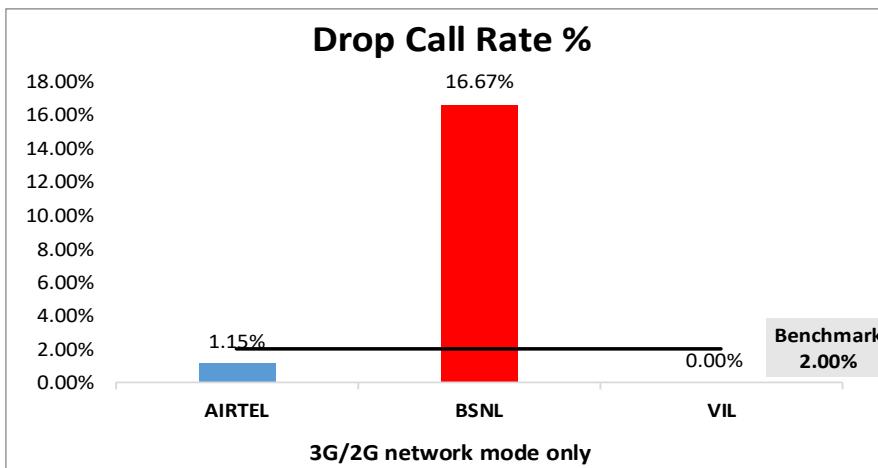


Figure-27: Performance for drop call rate.

(b) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider		
	AIRTEL	BSNL	VIL
3G	NA	71.38%	NA
2G	99.97%	28.07%	99.99%
Limited Service	0.03%	0.55%	0.01%

Table-59: Time spent on technology during drive test 3G/2G network mode only.

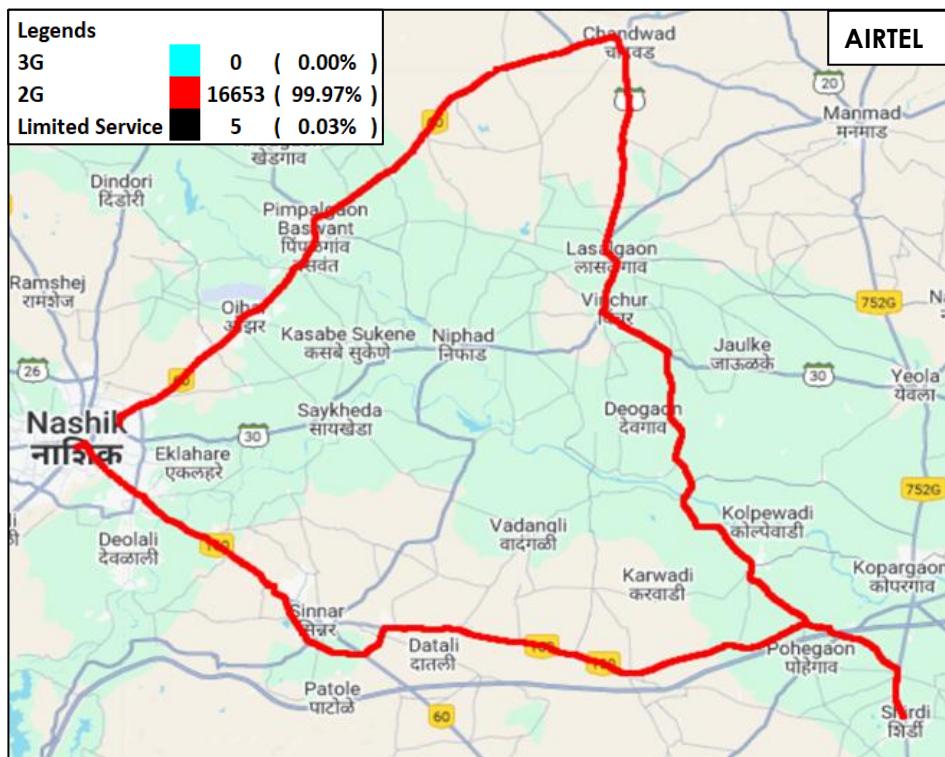


Figure-28: Serving technology plots 3G/2G network mode – AIRTEL.

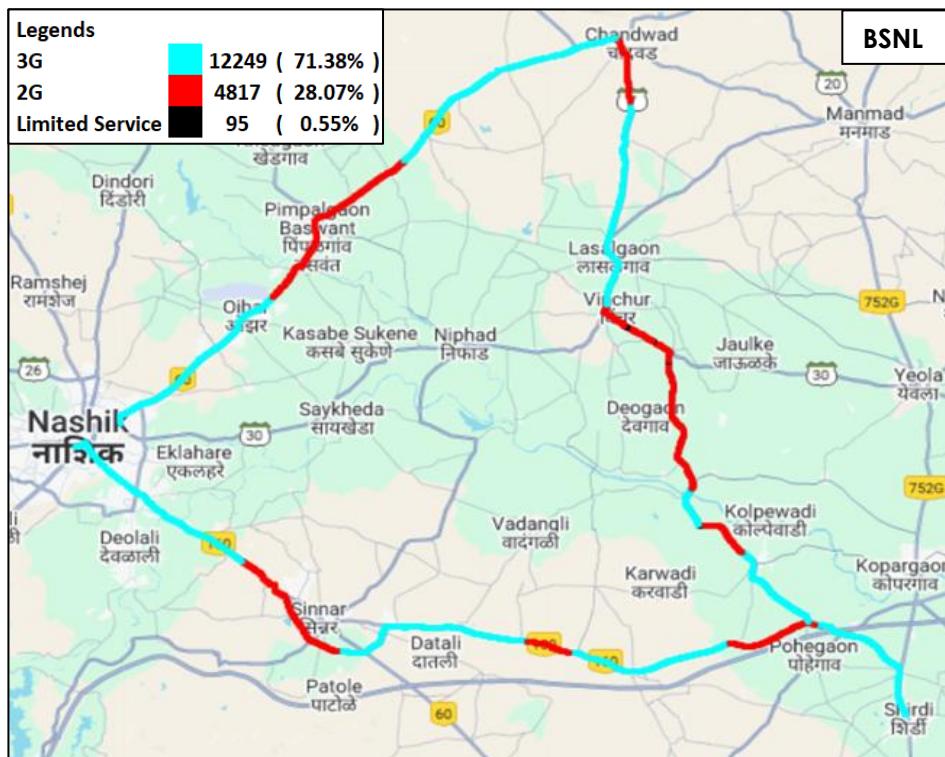


Figure-29: Serving technology plots 3G/2G network mode – BSNL.

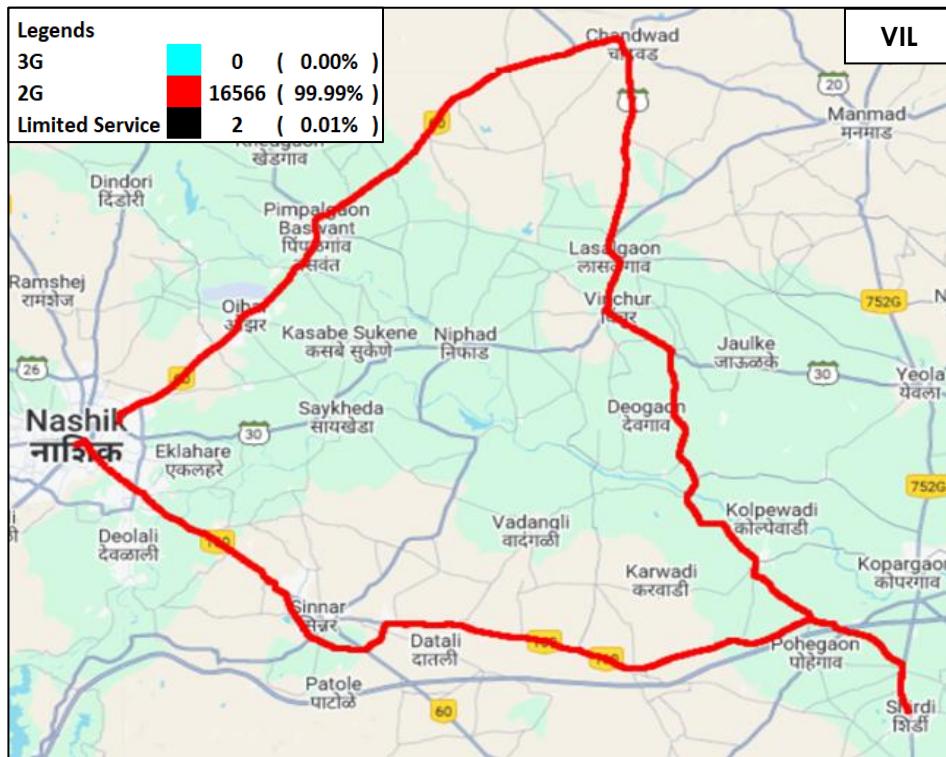


Figure 30: Serving technology plots 3G/2G network mode –VIL.

(c) Network Signal Strength Distribution: The following chart represents signal strength distribution for 3G/2G network mode only. (Refer figure-49, 50 & 51 for map view)

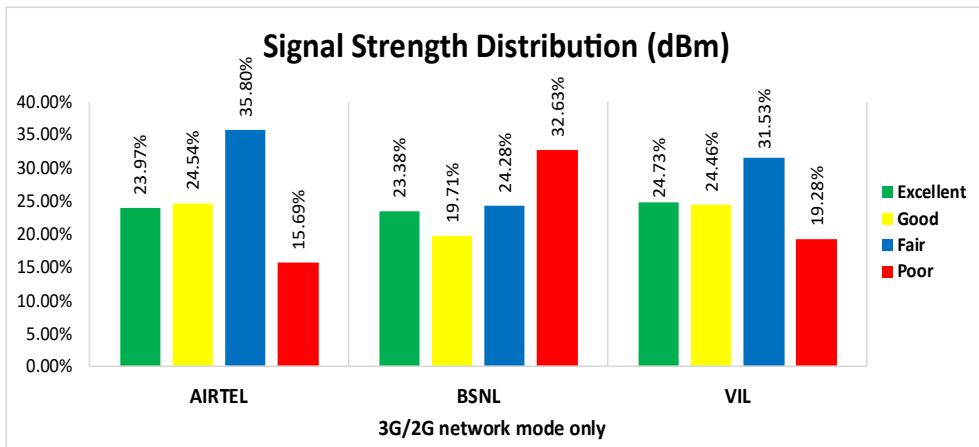


Figure-31: Signal strength distribution 3G/2G network mode only.

Observations:

- Airtel has 24% of samples falling in the excellent signal strength category.
- BSNL has 23% of samples falling in the excellent signal strength category.
- VIL has 25% of samples falling in the excellent signal strength category.

(d) Voice Call Performance in auto network selection mode (5G/4G/3G/2G)

Parameters	Service Provider			
	Auto-selection mode (5G/4G/3G/2G)			
	AIRTEL	BSNL	RJIL	VIL
Call Attempts	90	114	90	88
Call Setup Success Rate %	98.89	75.44	100.00	98.86
Drop Call Rate %	0.00	9.30	1.11	1.15
Call Setup Time Average (Second)	0.61	2.06	0.81	3.05
Handover Success Rate %	99.82	99.54	99.88	98.43

Table-60: Summary of voice call performance in network auto-selection mode.

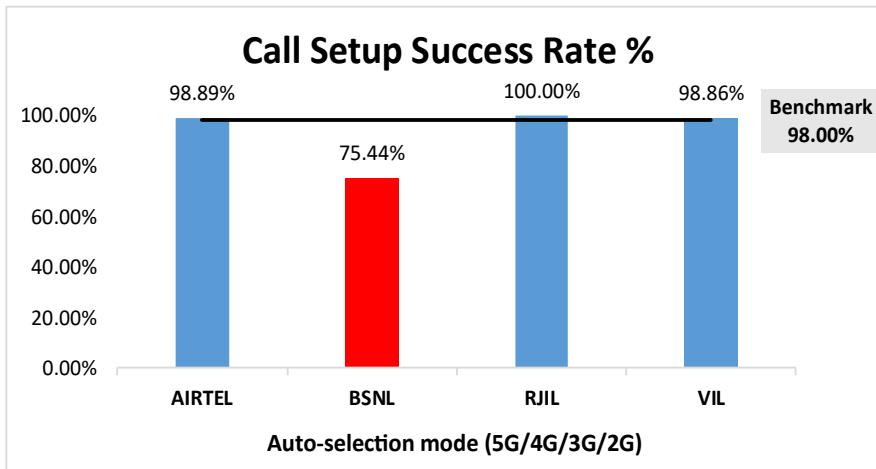


Figure-32: Performance for call setup success rate.

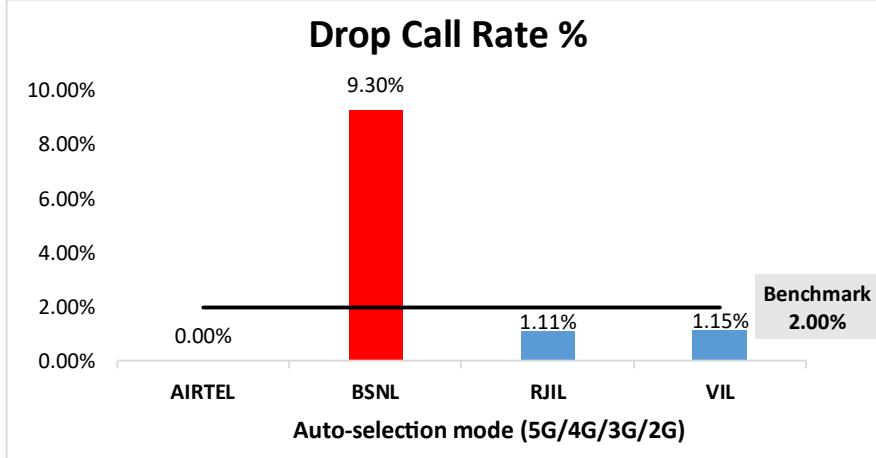


Figure-33: Performance for drop call rate.

Parameter	Service Provider			
	Mobile-to-Mobile (5G/4G - Open Mode)			
	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider Network)	75	111	77	76
Number of silence call for >4 Sec	4	4	1	0
Silence Call Rate %	5.33	3.60	1.30	0.00
Number of silence instances for >4 Sec	10	5	1	0
Number of silence instances for >3 Sec	17	5	1	0
Number of silence instances for >2 sec	38	11	5	3
RTP Jitter (4G & 5G) in ms	5.55	7.66	15.40	7.93
Packet loss Rate Downlink %	2.64	6.32	1.11	0.43
Packet loss Rate Uplink %	2.23	7.25	0.90	0.41

Table-61: Summary of silence instances & packet loss rate for mobile to mobile call.

(e) Mean Opinion Score (MOS) performance for speech quality:

Mean opinion score indicate quality of speech observed during the drive test across different technologies. This parameter has been calculated for mobile to mobile calls made within same operator network in auto mode (5G/4G/3G/2G). As per ITU-T Recommendation P.863.1, MOS values means: 5-Excellent, 4-Good, 3-Fair, 2-Poor, 1-Bad.

Speech Quality (MOS) distribution	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
Total Number of MOS Samples for calls in table-61	920	870	917	938
Speech Quality (Average MOS)	3.82	2.68	4.41	4.05
Number of samples with MOS >=4 to <5 (Excellent)	679	84	784	725
Number of samples with MOS >=3 to <4 (Good)	154	212	75	174
Number of samples with MOS >=2 to <3 (Fair)	35	380	26	24
Number of samples with MOS >=1 to <2 (Poor)	52	194	32	15
%age of samples with MOS >=4 to <5 (Excellent)	73.80%	9.66%	85.50%	77.29%
%age of samples with MOS >=3 to <4 (Good)	16.74%	24.37%	8.18%	18.55%
%age of samples with MOS >=2 to <3 (Fair)	3.80%	43.68%	2.84%	2.56%
%age of samples with MOS >=1 to <2 (Poor)	5.65%	22.30%	3.49%	1.60%

Table-62: Summary of speech quality (MOS) samples.

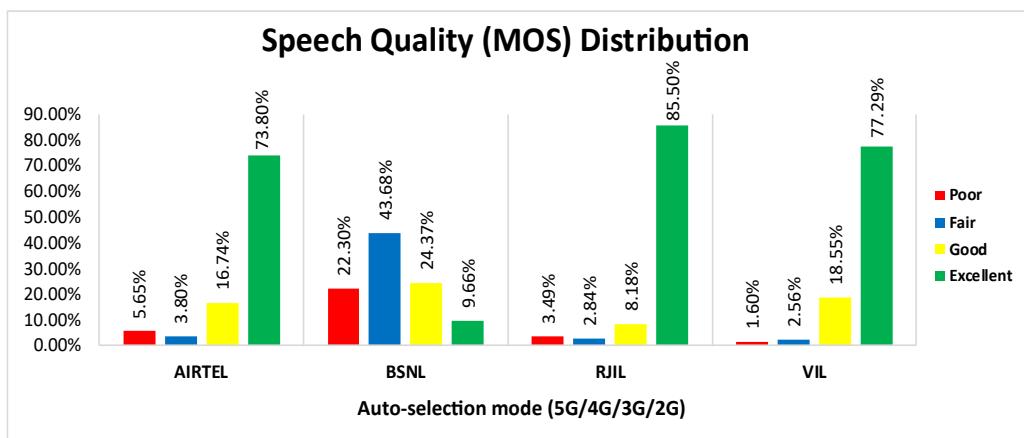


Figure-34: Distribution of samples in MOS range.

(f) Network Technology: This section represents time spent on various network technologies.

Technology	Service Provider			
	AIRTEL	BSNL	RJIL	VIL
5G	3.10%	NA	31.93%	0.12%
4G	96.90%	67.45%	68.07%	9.77%
3G	NA	13.62%	NA	NA
2G	0.00%	17.31%	NA	90.10%
Limited Service	0.00%	1.62%	0.00%	0.01%

Table-63: Time spent on technology during drive test.

Note-

- NA- Service provider doesn't provide services in respective technology.

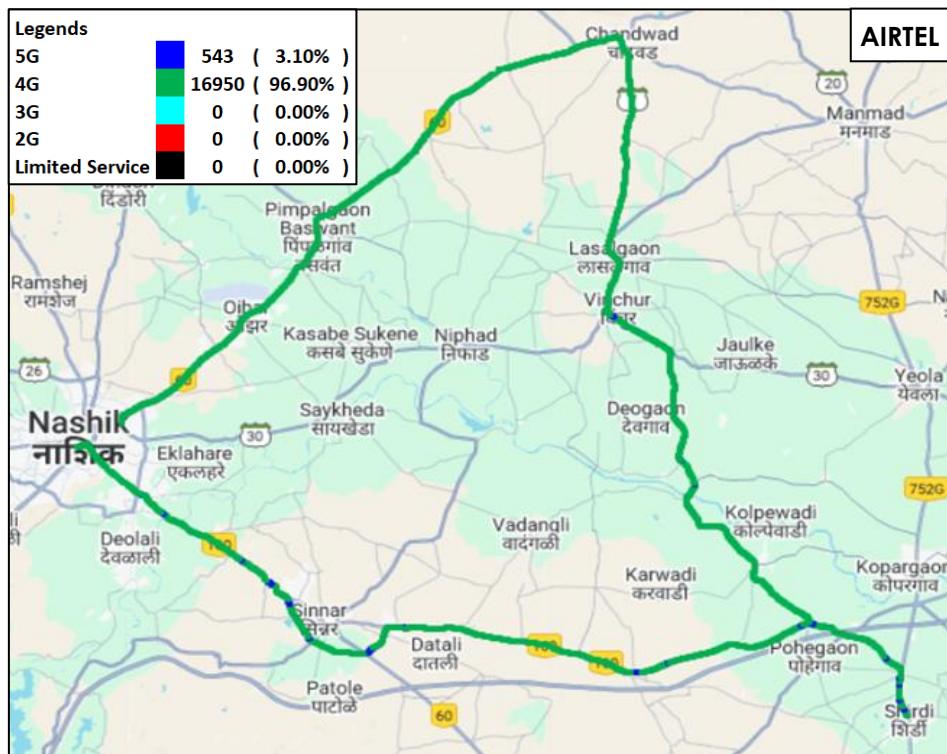


Figure-35: Serving technology plots in auto-selection mode (5G/4G/3G/2G)-AIRTEL

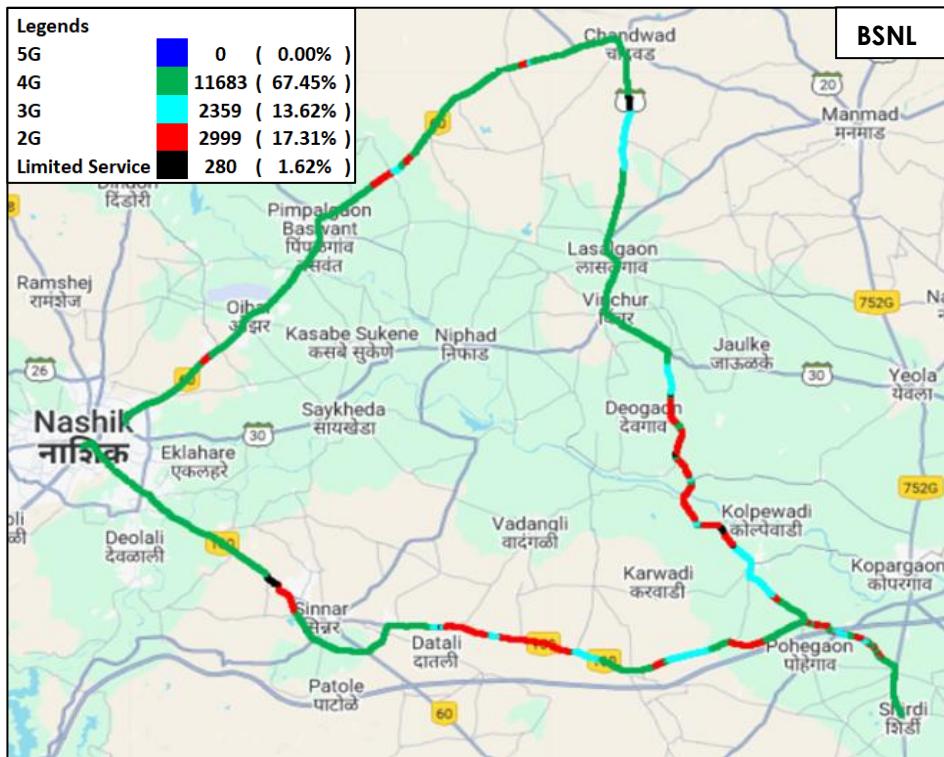


Figure-36: Serving technology plots in auto-selection mode (5G/4G/3G/2G)-BSNL.

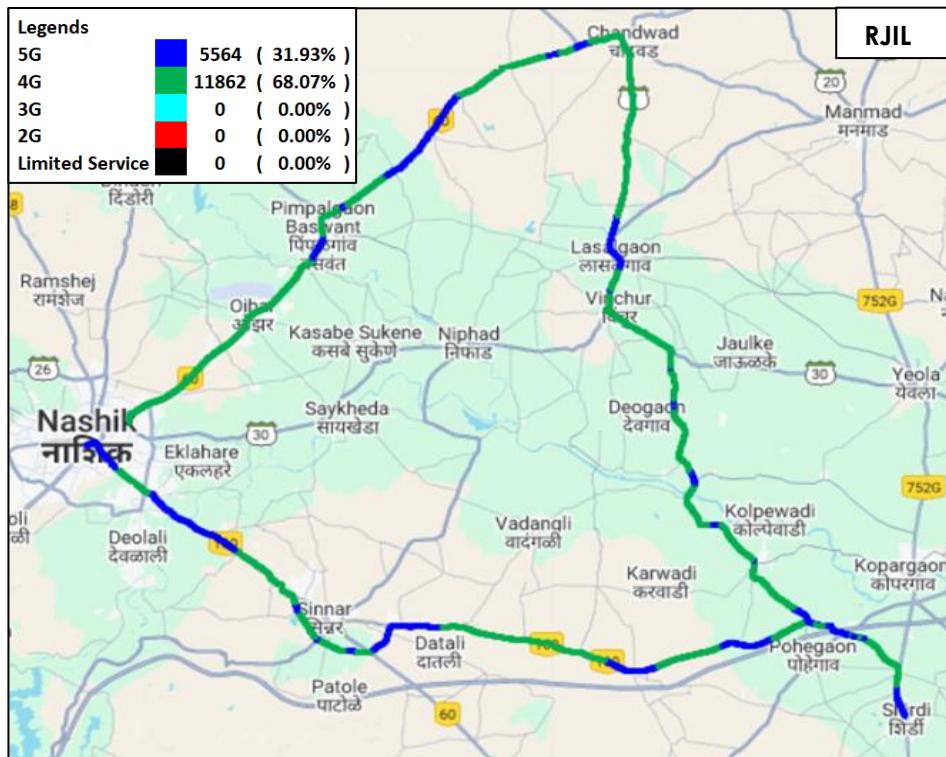


Figure-37: Serving technology plots in auto-selection mode (5G/4G/3G/2G)-RJIL.

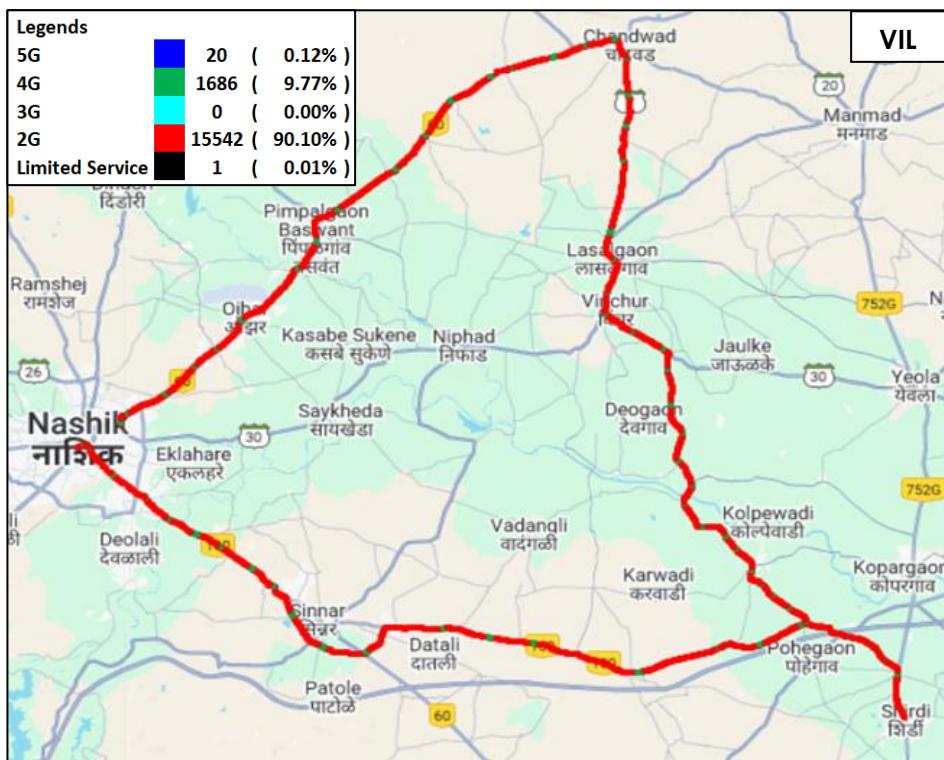


Figure-38: Serving technology plots in auto-selection mode (5G/4G/3G/2G)-VIL.

(g) Network Signal Strength Distribution: The following chart provides signal strength distribution for auto-selection mode (5G/4G/3G/2G). (Refer figure-52, 53, 54 & 55 for map view)

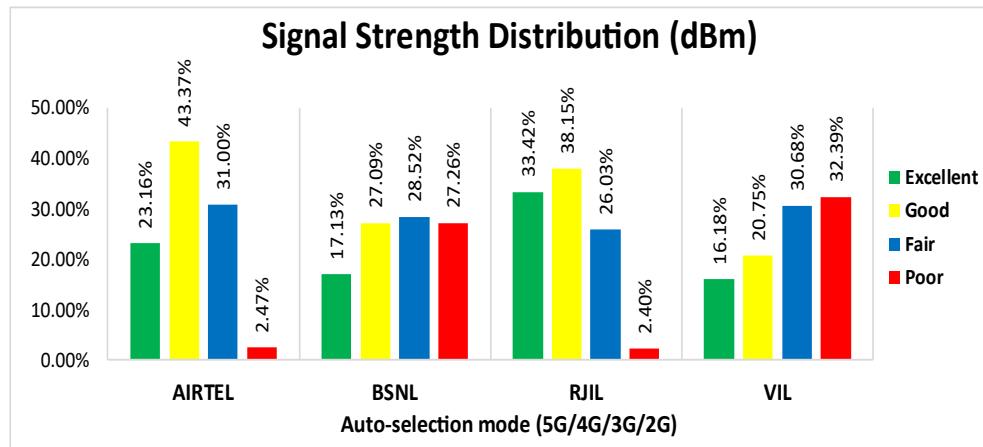


Figure-39: Signal strength distribution auto-selection mode 5G/4G/3G/2G.

Observations:

- Airtel has 23% of samples falling in the excellent signal strength category.
- BSNL has 17% of samples falling in the excellent signal strength category.
- RJIL has 33% of samples falling in the excellent signal strength category.
- VIL has 16% of samples falling in the excellent signal strength category.

4.5.4 Data performance

(a) Data Parameters (Auto-selection mode- 5G/4G/3G/2G)

Parameters		Service Provider			
		Auto-selection mode (5G/4G/3G/2G)			
		AIRTEL	BSNL	RJIL	VIL
Download Throughput (Mbits/s)	Average	107.41	4.43	207.43	45.81
	80th Percentile	178.03	6.74	392.19	67.21
	20th Percentile	22.50	0.89	22.54	7.37
Upload Throughput (Mbits/s)	Average	24.14	3.64	21.59	11.23
	80th Percentile	43.00	5.60	43.53	17.31
	20th Percentile	6.31	0.94	2.74	2.40
Latency (ms)	50th Percentile	40.44	41.51	24.79	42.22

Table-64: Summary of Data performance in network auto-selection mode.

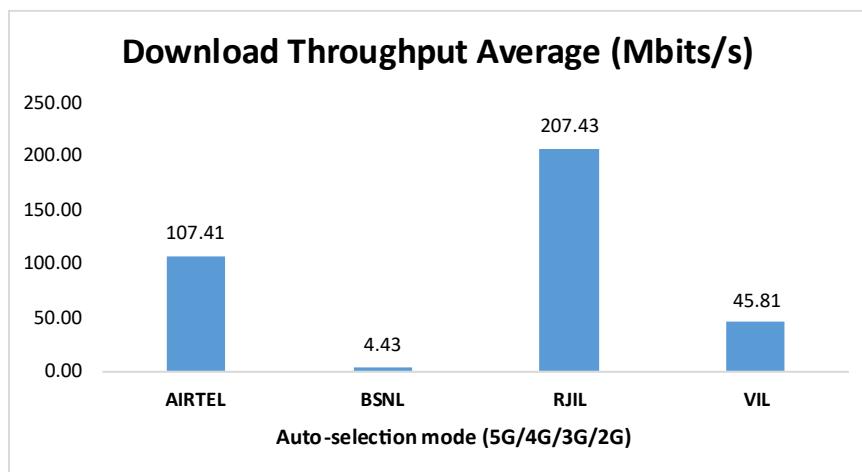


Figure 40: Download throughput.

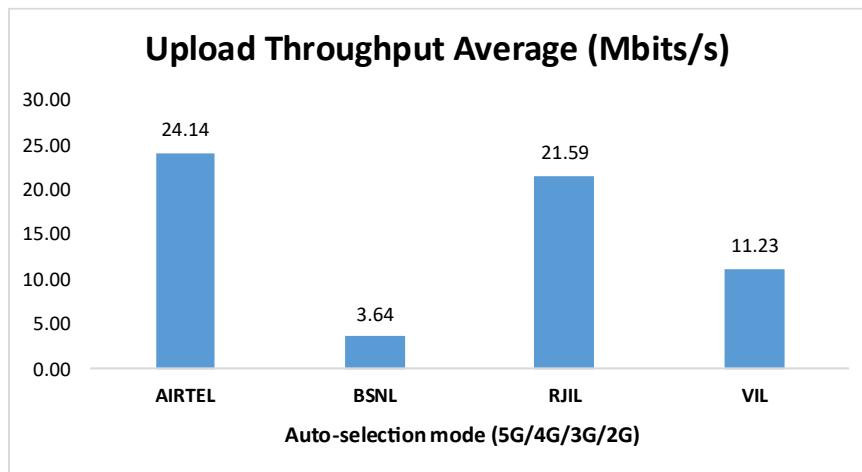


Figure-41: Upload throughput.

5. Voice & Data Key findings

5.1 Overall Voice

1. Call Setup Success Rate:

- a) Airtel, BSNL and VIL have 98.38%, 90.62% and 95.34% call setup success rate respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL have 99.64%, 86.60%, 100.00% and 94.66% call setup success rate respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)
- c) BSNL, RJIL & VIL have 100.00% call setup success rate while calling on peer service provider's network for inter-operator calls. (refer table-9)
- d) Airtel had a 100.00% call setup success when calling BSNL and VIL whereas call blocking was observed when calling RJIL. (refer table-9)

2. Call Setup Time:

- a) Airtel, BSNL and VIL call setup time is 4.79, 3.74 & 3.14 seconds respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL & VIL call setup time is 0.64, 2.17, 0.73 & 3.07 seconds respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

3. Call Silence/Mute Rate:

In packet switched network (4G/5G) Airtel, BSNL, RJIL & VIL have 3.51%, 3.47% 1.60% & 0.28% silence call rate respectively. Further BSNL has higher RTP packet loss rate in downlink (5.01%) compared to Airtel (1.93%), RJIL (1.32%) & VIL (0.55%). In uplink the RTP packet loss rate is higher for BSNL (4.32%) compared to Airtel (1.05%), RJIL (0.93%) & VIL (0.48%). (refer table-6)

4. Drop Call Rate:

- a) Airtel, BSNL and VIL drop call rate is 0.55%, 5.72% and 1.09% respectively in 3G/2G network mode. (refer table-3)
- b) Airtel, BSNL, RJIL and VIL drop call rate is 0.00%, 4.72%, 0.71% and 0.94% respectively in auto-selection mode (5G/4G/3G/2G). (refer table-5)

5.2 Overall Data

1. Data download and upload performance (Overall i.e. LSA):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 104.52 Mbps, 5.03 Mbps, 193.31 Mbps and 59.74 Mbps respectively. (refer table-11)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 26.21 Mbps, 4.78 Mbps, 23.51 Mbps and 15.92 Mbps respectively. (refer table-11)

2. Data download and upload performance (static i.e. while stationary):

- a) Airtel, BSNL, RJIL and VIL average download speeds are 87.91 Mbps, 7.28 Mbps, 163.05 Mbps and 91.72 Mbps respectively. (refer table-30)
- b) Airtel, BSNL, RJIL and VIL average upload speeds are 23.84 Mbps, 8.63 Mbps, 23.66 Mbps and 19.59 Mbps respectively. (refer table-30)

3. Data session setup success rate (static i.e. while stationary):

- a) All operators have 100.00% download session setup success rate. (refer table-30)
- b) All operators have 100.00% upload session setup success rate. (refer table-30)

5.3 Operator wise Key Findings

1. Airtel:

Voice

- 98.38% call setup success rate and 0.55% drop call rate have been observed in 3G/2G network mode for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 99.64% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 97.88% call setup success rate and 0.36% drop call rate have been observed in 3G/2G network mode for city drive. Performance is not meeting with benchmark of 98.00% for call setup success rate. (refer table-13)
- 99.67% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at all walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-50, 51, 52 & 53)
- 100.00% call setup success rate and 1.15% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-58)
- 98.89% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-60)

Data

- Airtel has 104.52 Mbps average download speed & 26.21 Mbps average upload speed for LSA. (refer table-11)
- Airtel has 107.90 Mbps average download speed & 26.88 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- District Collector Office, Mahamarg Bus Stand, RTO Office Nashik, Serene Meadows Anandvalli, Shri Kalaram Mandir Panchavati and Someshwar Waterfall have less download speed (less than 100 Mbps) out of total 9 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 32, 33, 35, 36, 37 & 38)
- District Collector Office, Mahamarg Bus Stand, Serene Meadows Anandvalli, Shri Kalaram Mandir Panchavati and Someshwar Waterfall have less upload speed (less than 20 Mbps) out of total 9 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 32, 33, 36, 37 & 38)
- Nashik Railway Station, Panchwati Ghat & Shalimar Market have less download speed (less than 100 Mbps) out of total 4 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table- 54, 55 & 56)

- Shalimar Market has less upload speed (less than 20 Mbps) out of total 4 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table- 56)
- Airtel has 107.41 Mbps average download speed & 24.14 Mbps average upload speed across the measured routes for highway drive. (refer table-64)

2. BSNL:

Voice

- 90.62% call setup success rate and 5.72% drop call rate have been observed in 3G/2G network mode for LSA. Performance is not meeting with benchmark of 98.00% & 2.00% respectively. (refer table-3)
- 86.60% call setup success rate and 4.72% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 92.64% call setup success rate and 2.17% drop call rate have been observed in 3G/2G network mode for city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-13)
- 86.73% call setup success rate and 5.34% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 98.89% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 80.77% call setup success rate and 9.52% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Nashik Railway Station walk test location. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table- 50)
- 85.00% & 88.89% call setup success rate and 0.00% & 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Panchwati Ghat & Shalimar Market walk test locations respectively. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table- 51 & 52)
- 100% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Shirdi Sai Baba Temple Bus Stand walk test location. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 53)
- 84.91% call setup success rate and 16.67% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-58)
- 75.44% call setup success rate and 9.30% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is not meeting the benchmark of 98.00% & 2.00% respectively. (refer table-60)

Data

- BSNL has 5.03 Mbps average download speed & 4.78 Mbps average upload speed for LSA. (refer table-11)
- BSNL has 4.45 Mbps average download speed & 3.20 Mbps average upload speed across the measured routes for city drive. (refer table-19)

- All hotspot locations have less download speed (less than 10 Mbps) except Nashik Airport for auto-selection mode (5G/4G/3G/2G). (refer table- 31, 32, 33, 35, 36, 37, 38 & 39)
- Civil Hospital has less upload speed (less than 2 Mbps) out of total 9 hotspots locations for auto-selection mode (5G/4G/3G/2G). (refer table- 31)
- All walktest locations have less download speed (less than 10 Mbps) for auto-selection mode (5G/4G/3G/2G). (refer table- 54, 55, 56 & 57)
- BSNL has 4.43 Mbps average download speed & 3.64 Mbps average upload speed across the measured routes for highway drive. (refer table- 64)

3. RJIL:

Voice

- 100.00% call setup success rate and 0.71% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-5)
- 100.00% call setup success rate and 0.99% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at all walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 50, 51, 52 & 53)
- 100.00% call setup success rate and 1.11% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 60)

Data

- RJIL has 193.31 Mbps average download speed & 23.51 Mbps average upload speed for LSA. (refer table-11)
- RJIL has 199.46 Mbps average download speed & 22.42 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Nashik Airport, Serene Meadows Anandvalli and Someshwar Waterfall have less download speed (less than 100 Mbps) out of total 9 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 34, 36 & 38)
- District Collector Office, Nashik Airport, RTO Office Nashik, Serene Meadows Anandvalli and Someshwar Waterfall have less upload speed (less than 20 Mbps) out of total 9 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 32, 34, 35, 36 & 38)
- Shirdi Sai Baba Temple Bus Stand has less upload speed (less than 20 Mbps) out of total 4 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table- 57)
- RJIL has 207.43 Mbps average download speed & 21.59 Mbps average upload speed across the measured routes for highway drive. (refer table- 64)

4. VIL:

Voice

- 95.34% call setup success rate and 1.09% drop call rate have been observed in 3G/2G network mode for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-3)
- 94.66% call setup success rate and 0.94% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for LSA. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-5)
- 94.61% call setup success rate and 1.42% drop call rate have been observed in 3G/2G network mode for city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-13)
- 90.88% call setup success rate and 1.43% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for city drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-15)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for all hotspot locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table-20)
- 94.12% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Shalimar Market walk test location. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table- 52)
- 100.00% call setup success rate and 0.00% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) at Nashik Railway Station, Panchwati Ghat, Shirdi Sai Baba Temple Bus Stand walk test locations. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 50, 51 & 53)
- 97.75% call setup success rate and 0.00% drop call rate have been observed in 3G/2G network mode for highway drive. Performance is not meeting the benchmark of 98.00% for call setup success rate. (refer table-58)
- 98.86% call setup success rate and 1.15% drop call rate have been observed in auto-selection mode (5G/4G/3G/2G) for highway drive. Performance is well within the benchmark of 98.00% & 2.00% respectively. (refer table- 60)

Data

- VIL has 59.74 Mbps average download speed & 15.92 Mbps average upload speed for LSA. (refer table-11)
- VIL has 59.64 Mbps average download speed & 15.79 Mbps average upload speed across the measured routes for city drive. (refer table-19)
- Nashik Airport, RTO Office Nashik, Serene Meadows Anandvalli, Shri Kalaram Mandir Panchavati, Someshwar Waterfall and Trimbakeshwar Jyotirling Mandir have less download speed (less than 100 Mbps) out of total 9 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 34, 35, 36, 37, 38 & 39)
- Mahamarg Bus Stand, Nashik Airport, Shri Kalaram Mandir Panchavati and Someshwar Waterfall have less upload speed (less than 20 Mbps) out of total 9 hotspot locations for auto-selection mode (5G/4G/3G/2G). (refer table- 33, 34, 37 & 38)

- Nashik Railway Station, Shalimar Market and Shirdi Sai Baba Temple Bus Stand have less download speed (less than 100 Mbps) out of total 4 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table- 54, 56 & 57)
- Shalimar Market & Shirdi Sai Baba Temple Bus Stand have less upload speed (less than 20 Mbps) out of total 4 walk test locations for auto-selection mode (5G/4G/3G/2G). (refer table- 56 & 57)
- VIL has 45.81 Mbps average download speed & 11.23 Mbps average upload speed across the measured routes for highway drive. (refer table- 64)

6. Annexure

6.1 Route wise coverage map

6.1.1 City

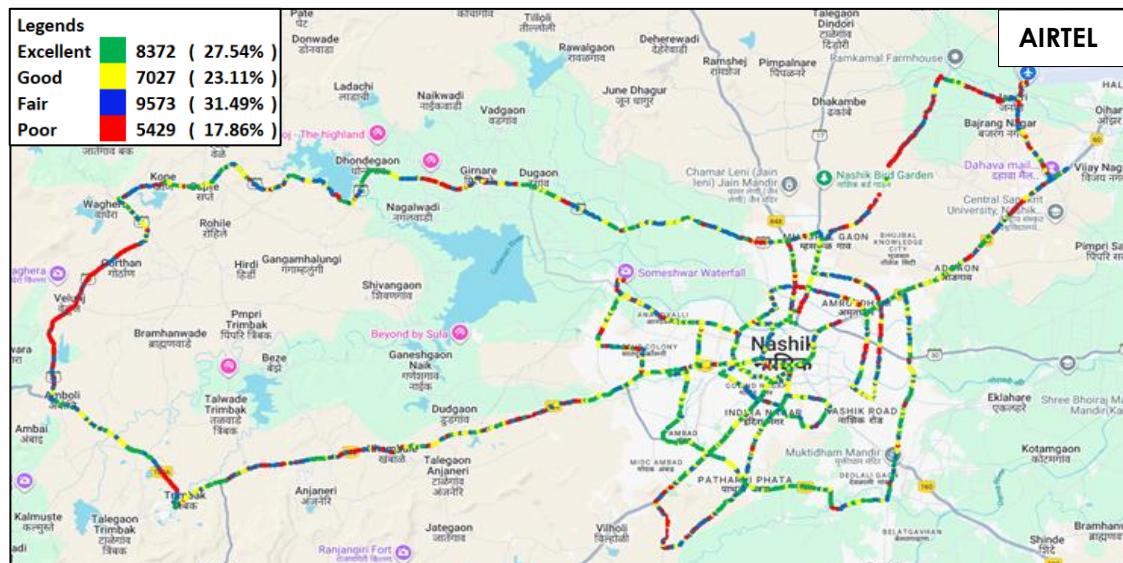


Figure-42: Signal strength 3G/2G network mode – AIRTEL.

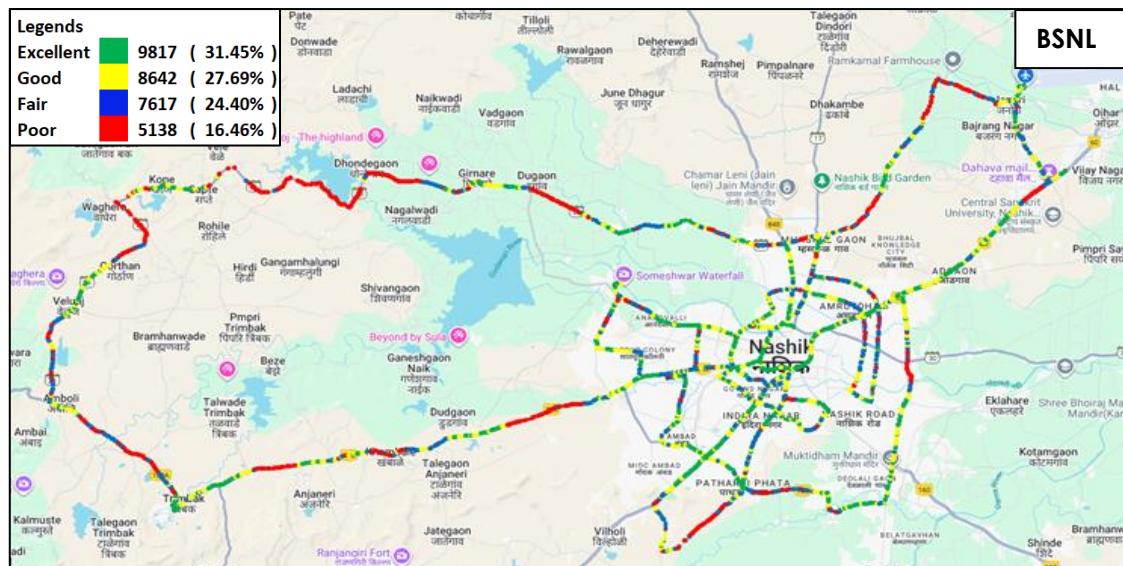


Figure-43: Signal strength 3G/2G network mode – BSNL.

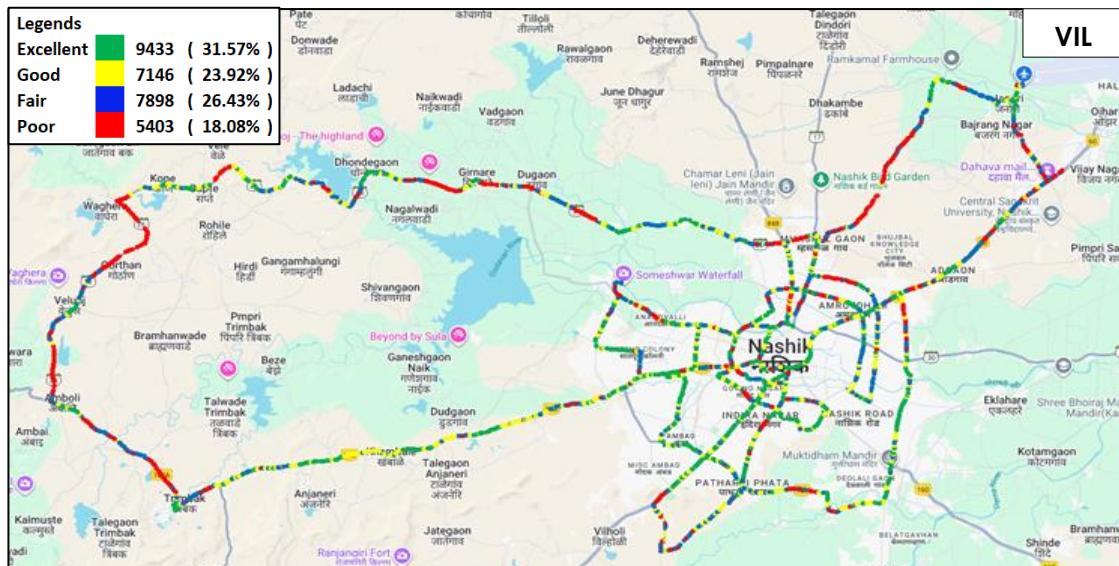


Figure-44: Signal strength 3G/2G network mode – VIL.

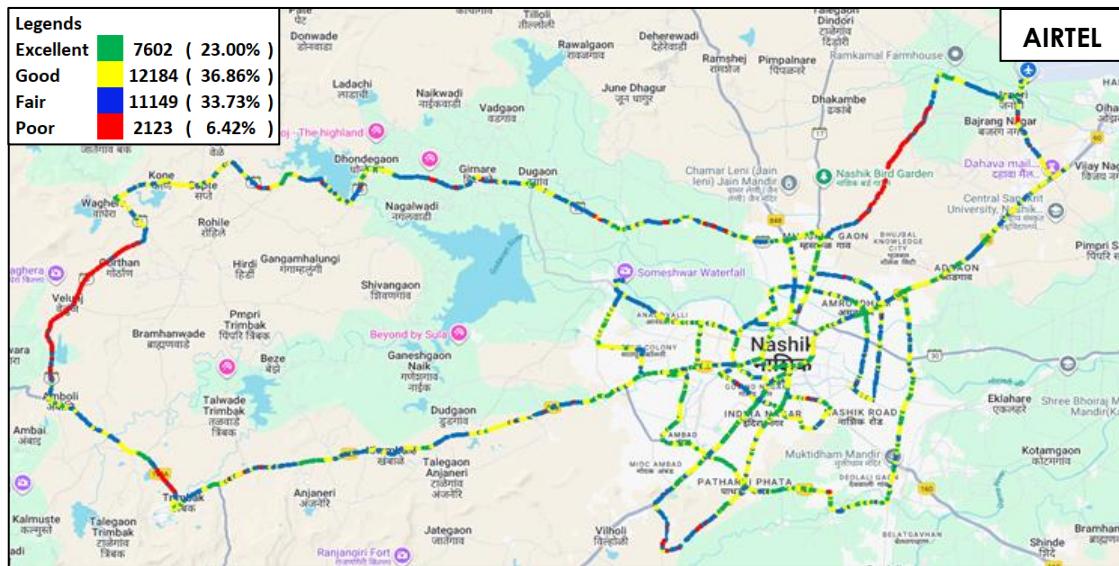


Figure-45: Signal strength auto-selection mode 5G/4G/3G/2G – AIRTEL.

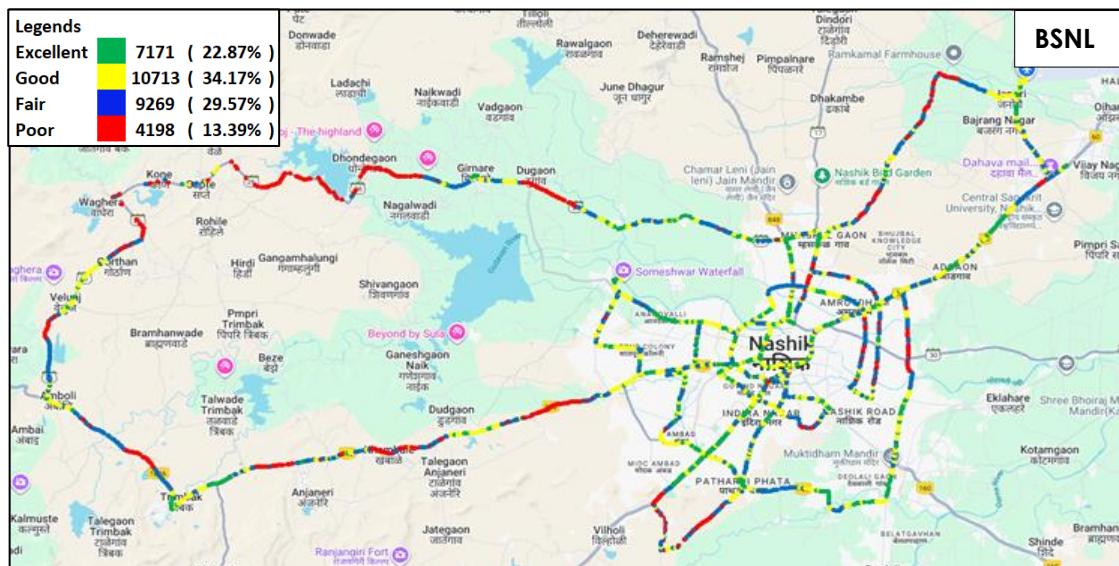


Figure-46: Signal strength auto-selection mode 5G/4G/3G/2G – BSNL.

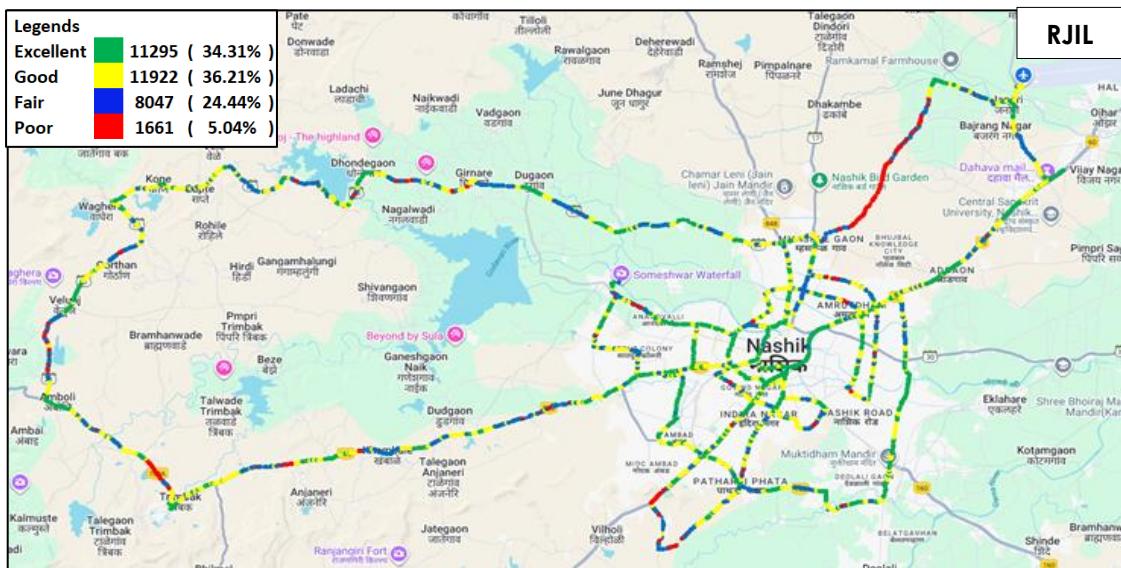


Figure-47: Signal strength auto-selection mode 5G/4G/3G/2G – RJIL.

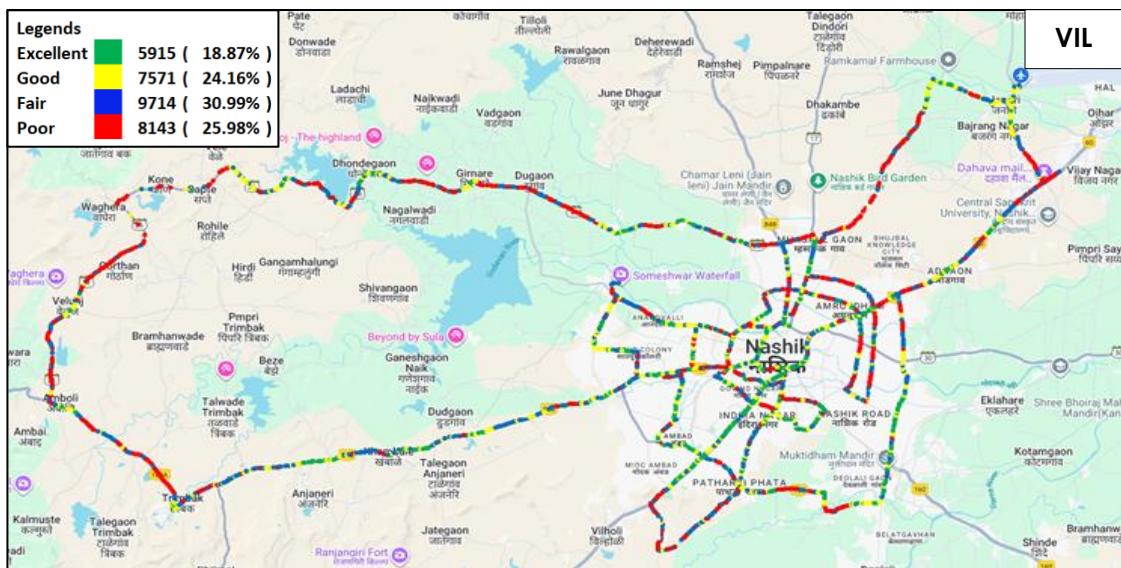


Figure-48: Signal strength auto-selection mode 5G/4G/3G/2G – VIL.

6.1.2 Highway

i) Nashik-Shirdi- Chandwad-Nashik

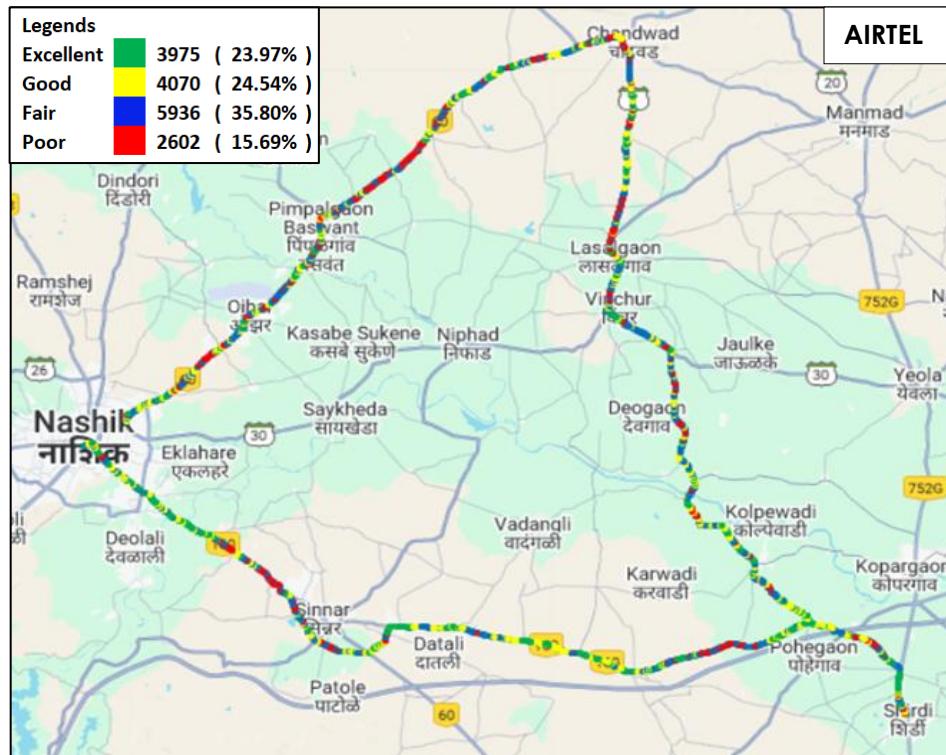


Figure-49: Signal strength 3G/2G network mode – AIRTEL.

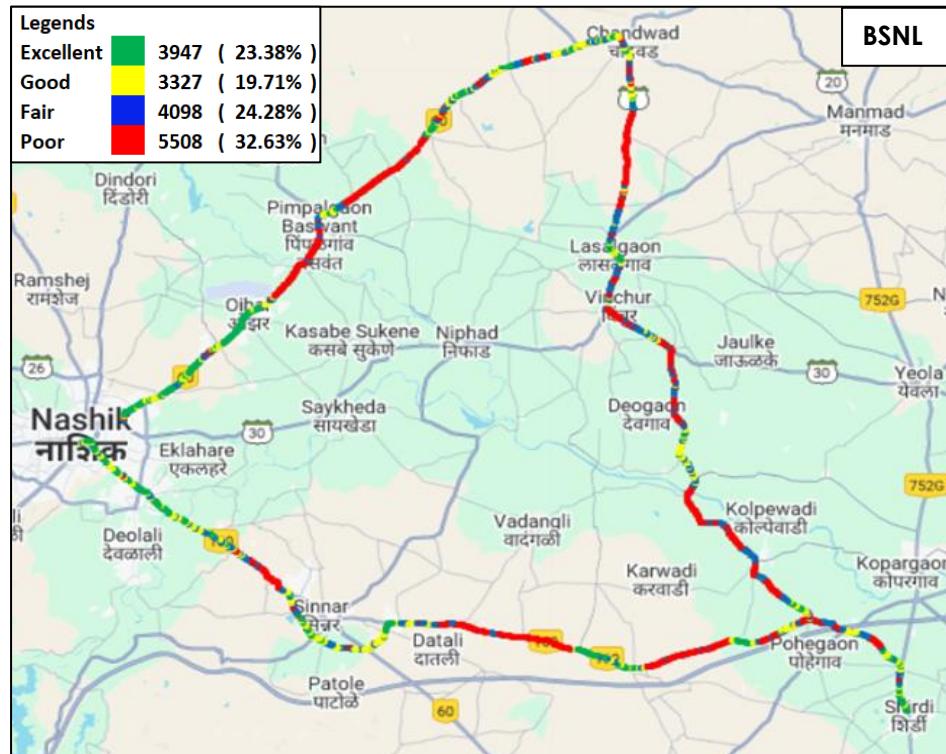


Figure-50: Signal strength 3G/2G network mode – BSNL.

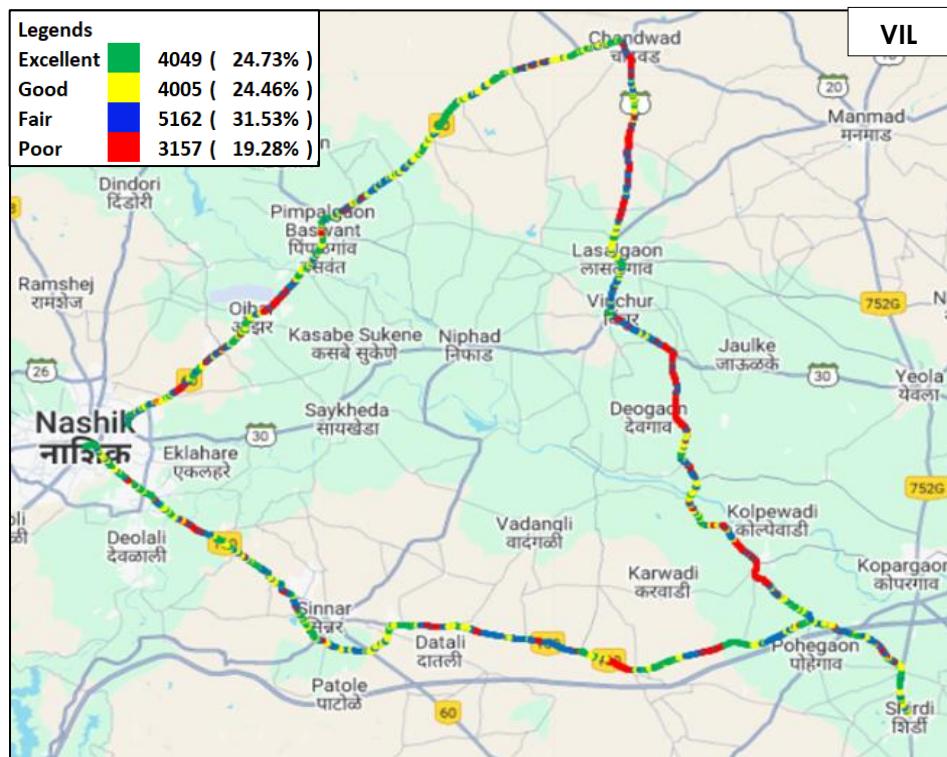


Figure-51: Signal strength 3G/2G network mode – VIL.

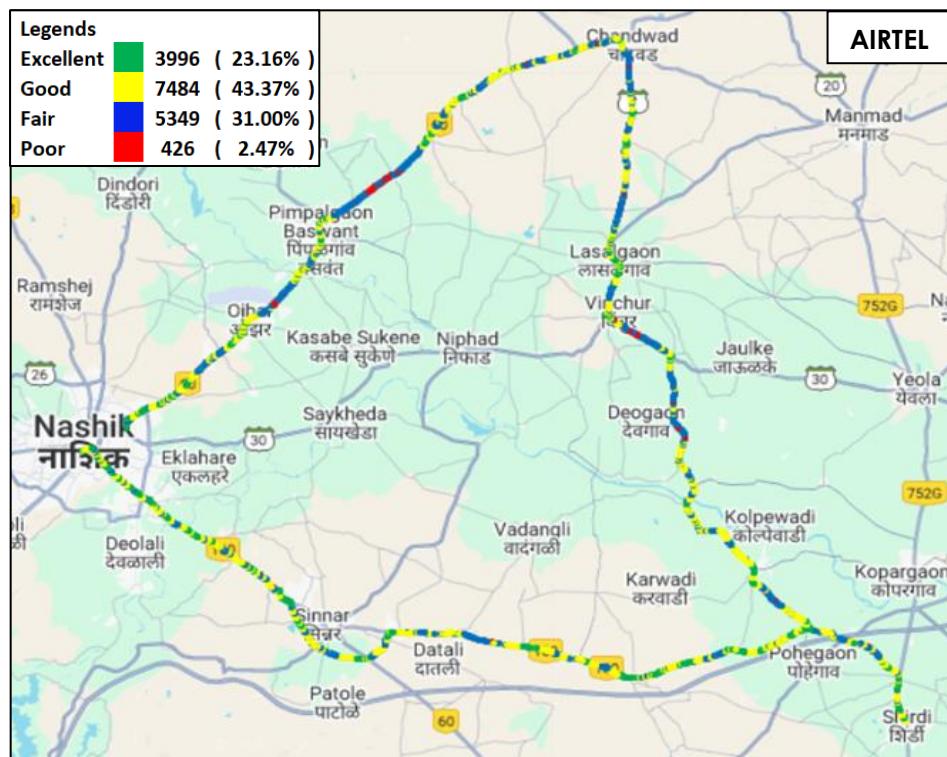


Figure-52: Signal strength auto-selection mode 5G/4G/3G/2G – AIRTEL.

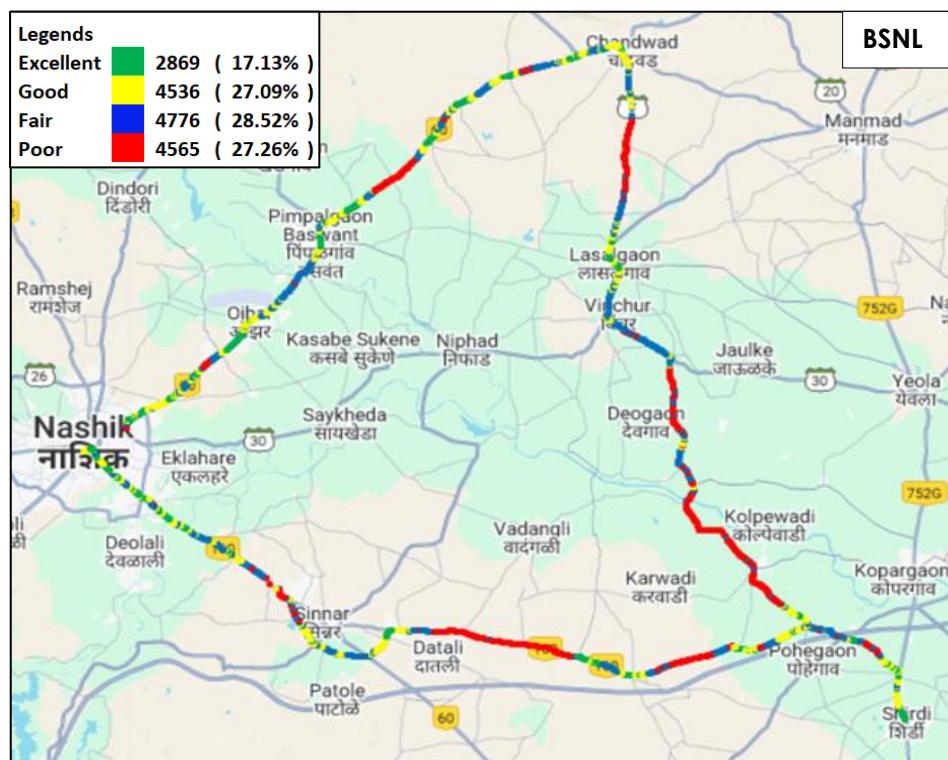


Figure-53: Signal strength auto-selection mode 5G/4G/3G/2G – BSNL.

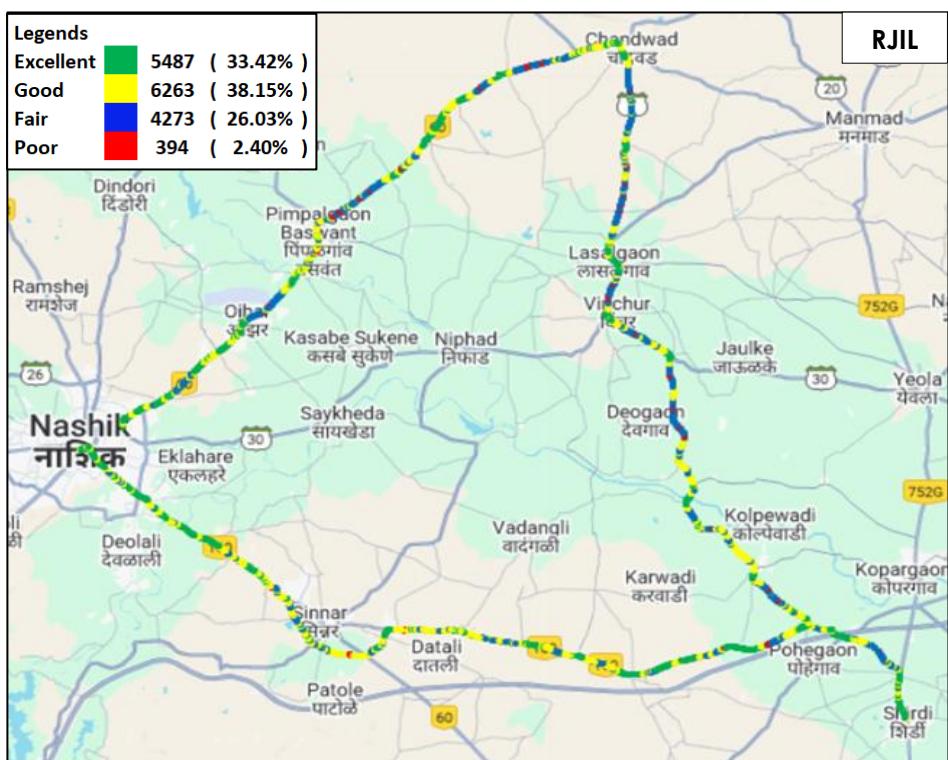


Figure-54: Signal strength auto-selection mode 5G/4G/3G/2G – RJIL.

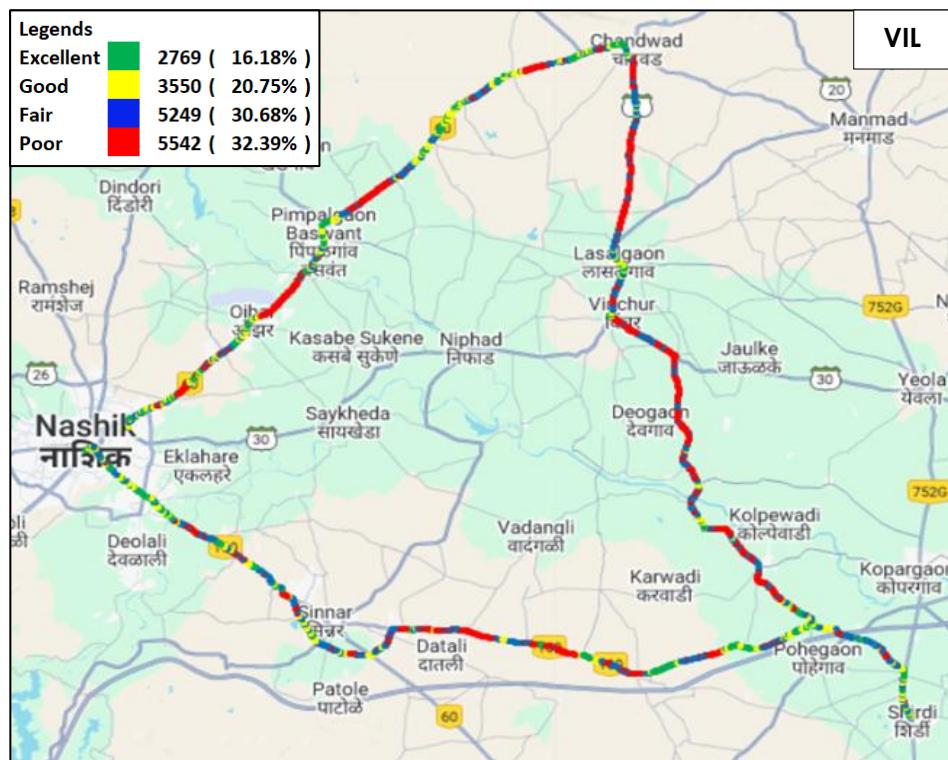


Figure-55: Signal strength auto-selection mode 5G/4G/3G/2G – VIL.

7. Appendix

The details of the setup used for conducting the drive test and the network or performance parameters captured under different conditions may be seen at Appendix-I. The calculation method of each QoS parameter is given in Appendix-II of the report. The summary of key equipment used in technical setup is as under

- **Device-1:** OnePlus Nord CE3 for 3G/2G CAT-15 Smartphone.
- **Device-2:** Samsung Galaxy S23 for 5G/4G/3G/2G CAT-20 Smartphone
- **Drive test Software:** Azenqos Engineering capable Applications to capture actual user experience.

7.1 Appendix-I

7.1.1 Drive test setup

Voice Call		
Call details	Technology	Detail
Call Setup Timeout	• 3G/2G auto mode- switch Call • 5G/4G/3G/2G auto mode- switch Call • 5G/4G MOS Call	30 Sec
Call Duration		90/180 seconds
Wait/ Guard Time		15 Sec

Table-65: Voice test detail

Note-

- There is 15 sec wait time after locking and before starting first call in 3G/2G call.
- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.
- Speech quality (MOS) has been measured only in city drive & highway by making Mobile to Mobile call.
- 180 Sec calls were made only in highway & railway route drive.

Data Test		
Test Type	Technology	Detail
HTTP Download	5G/4G/3G/2G Auto Mode	500 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
HTTP Upload		250 MB File- 30 Sec Timeout, (Multithread 3- TCP Connection at a time)
YouTube Streaming		20 Sec Video & 25 sec Timeout (Only at Hotspot)
Web Browsing		3 popular websites (www.google.co.in , www.irctc.co.in , www.sbi.co.in) 20 sec timeout (only at Hotspot)

Latency & Jitter (TWAMP-UDP)	25 count- Dynamic 500 count- Hotspot Payload- 42 bytes in all drive
Packet Loss Rate (TWAMP-UDP & TCP)	500 counts (TWAMP-UDP) 500 counts (TCP) at each hotspot Payload- 42 bytes in all drive

Table-66: Data test detail

Note-

- 5 Data iteration to be done at each hotspot location.
- Minimum 5 iteration to be made during the walk test. Iteration count will be increased based on walk test distance.
- TWAMP-UDP & TCP test to be performed only once at hotspot location.
- Youtube & Web browsing test to be performed at static location only.
- All values are taken up to two decimal places with round off.
- Delhi-based TRAI server was used for HTTP Download, Upload, TCP and TWAMP testing for Airtel and BSNL.
- RJIL server was used for FTP Download, FTP Upload, TCP and TWAMP testing, for RJIL.
- VIL server was used for HTTP Download and HTTP Upload, for VIL.
- Initially, VIL server was being used for TCP and TWAMP testing, but due to an issue with the VIL TCP & TWAMP server, the Delhi-based TRAI server was used for TCP and TWAMP testing for VIL.

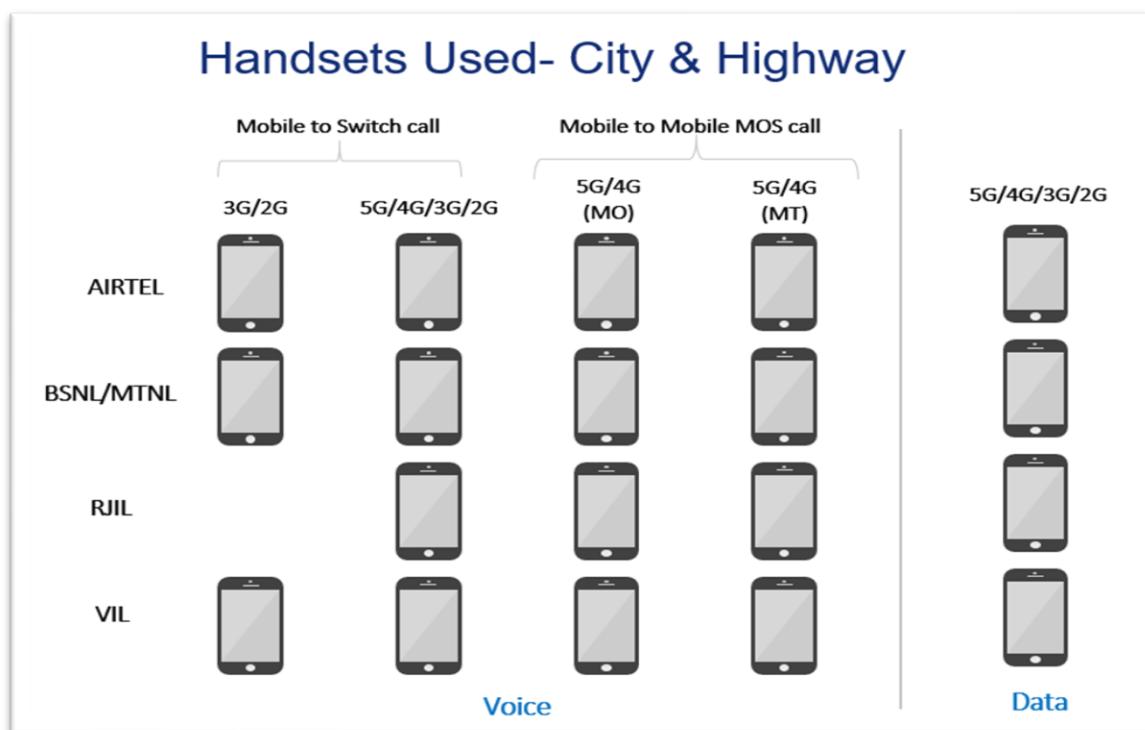


Figure-56: Number of handsets used in city & highway drive

MO: Mobile originating

MT: Mobile terminating

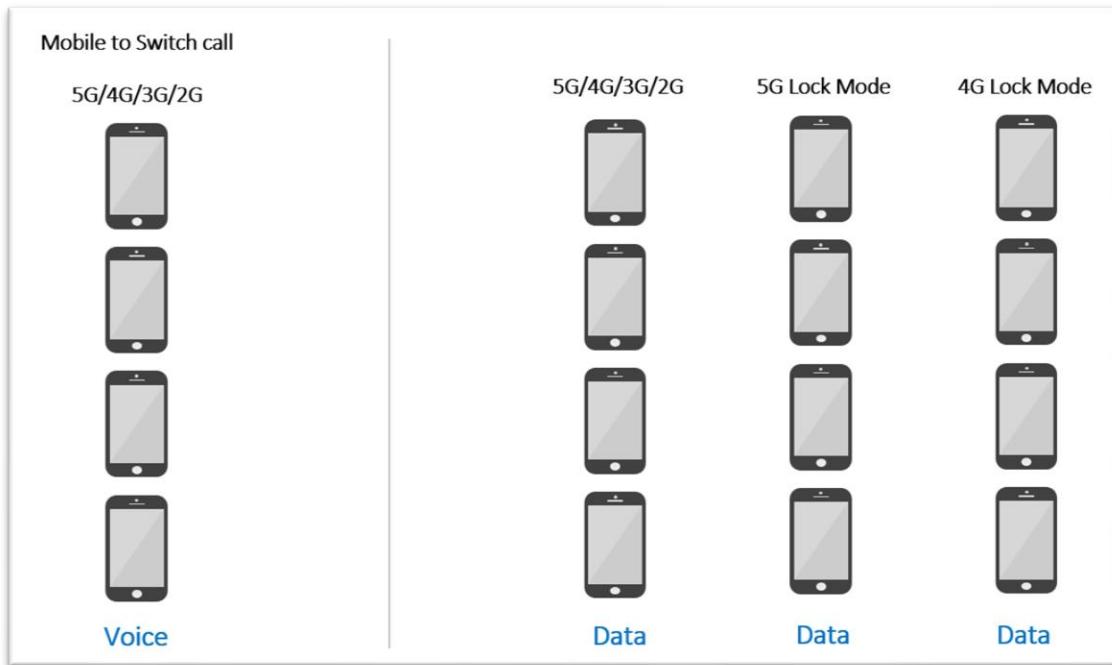


Figure-57: Number of handsets used in railway/metro/walktest/hotspot/coastal area

Note- 5G & 4G Lock mode testing has been performed at hotspot locations only.

7.1.2 Drive test Methodology

(a) Dynamic voice testing (on the move)

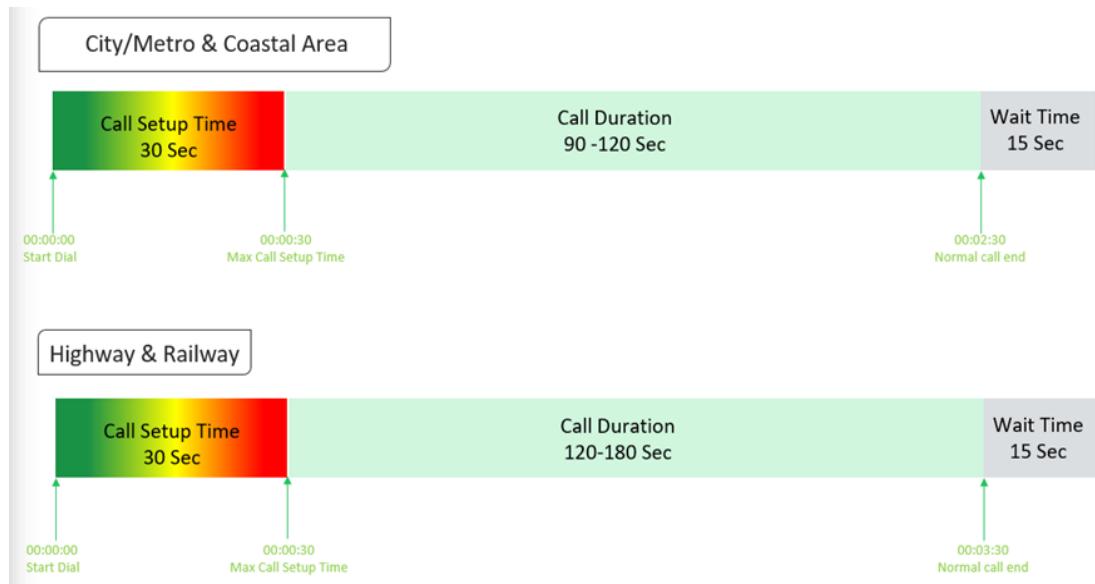


Figure-58: Voice test script for city/railway/metro/highway & coastal area

- 15 sec wait time is applied after locking Radio Access Technology (RAT) to 3G/2G and before starting first call in 3G/2G call.
- Speech quality (MOS) will be measured only City & Highway drive by making Mobile to Mobile calls.

(b) Hotspot voice testing



Figure-59: Voice test script for walktest/hotspot

- 10 calls to be made at each Hotspot location.
- Minimum 10 Calls to be made during the walk test. Call count will be increased based on walk test distance.

(c) Dynamic Data (internet) test

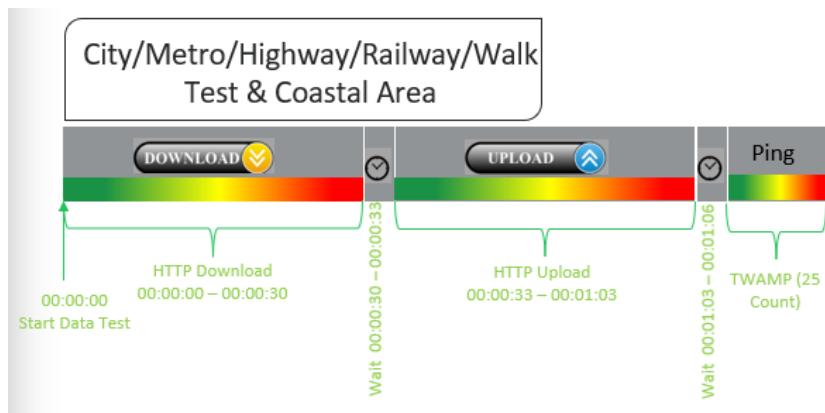


Figure-60: Data test script used in city/metro/railway/highway/walk test & coastal area

(d) Static Data(internet) testing

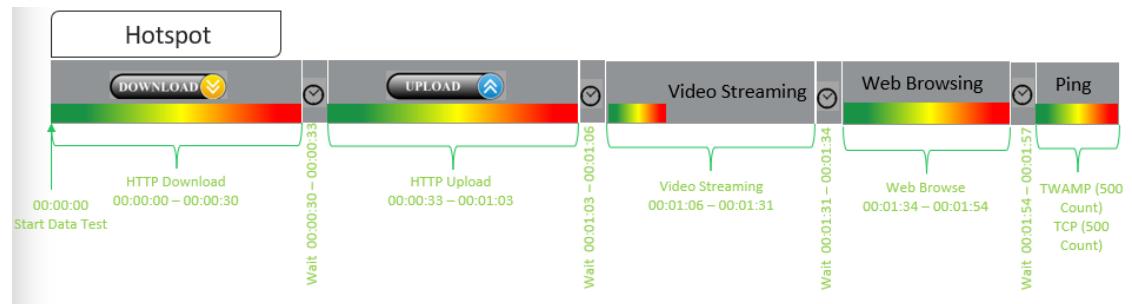


Figure-61: Data test script used at hotspot

- 5 Data iteration done at each hotspot location
- Min. 5 iteration made during the walk test.
- Web browsing duration mentioned above is for one web site only.
- One ping iteration (with 500 Count of each- TWAMP & TCP) done at hotspot location.

7.2 Appendix-II

7.2.1 Network Performance Parameters for Voice calls

Parameter Name	Definition
Call Setup Success Rate	<p>(i) Call Setup Success Rate is defined as the ratio of Established Calls to Call Attempts. 'Established Calls' mean the following events have happened in call setup:</p> <ul style="list-style-type: none"> (a) Call attempt is made (b) The signaling channel is allocated (c) The call is routed to the outwards path of the terminating network (d) An alert signal is received by caller in the form of ring back tone, busy tone, or an announcement. <p>$\text{CSSR} = (\text{Total Call Established} / \text{Total Call Attempt}) * 100$</p> <p>As per QoS Regulation 2024 benchmark value is $\geq 98\%$</p>
Drop Call Rate	<p>Call drop represents the service provider network's ability to maintain a call once it has been successfully established. This parameter shall include both incoming calls and outgoing calls which, once they have been established and have an assigned traffic channel/ bearer, are dropped, or interrupted before their normal completion by the user, the cause of the early termination being within the service provider's network</p> <p>$\text{Drop Call Rate} = (\text{Total Call Drop} / \text{Total Call Established}) * 100$</p> <p>As per QoS Regulation 2024 benchmark value is $\leq 2\%$</p>
Call Setup Time	<p>Time taken from call initiate to call alerting/ringing.</p> <p>$\text{Call Setup Time} = \text{T2} - \text{T1}$</p> <p>T2- Ringing (VoLTE/VoNR) & Alerting (for WCDMA & GSM), T1- Invite (VoLTE/VoNR) & CM Service Request (for WCDMA & GSM)</p>
Voice Quality (MOS)	<p>Voice quality in mobile networks is measured with algorithms based on ITU-T P.863 (POLQA). The grading for Voice quality has been given as:</p> <p>Excellent: $\text{MOS} \geq 4$ and < 5 Good : $\text{MOS} \geq 3$ and < 4 Fair : $\text{MOS} \geq 2$ and < 3 Poor : $\text{MOS} \geq 1$ and < 2</p>
Handover Success Rate	<p>Handover Success Rate = Count of successful handovers (All Technology Handover combined) / Total count of Handover Attempt (All Technology Handover combined) *100</p> <p>Handover type which are considered- 2G Inter & Intra cell, 3G Soft & IRAT, 4G Inter & Intra frequency & SRVCC, 5G Inter & Intra frequency & 5G to 4G handovers.</p>
Silence Call	<p>A call which has ≥ 4 sec continuous RTP gap is considered as a Silence Call.</p> <p>$\text{Silence call rate} = (\text{count of silence call} / \text{Total calls established}) * 100$</p> <p>If a call observes multiple silence count ≥ 4 sec in a particular established call it has been taken as one silent event.</p>

Jitter	<p>The inter arrival jitter is the difference in the relative transit time for two packets. The relative transit time is the difference between a packet's Real-time Transport Protocol (RTP) timestamp and the receiver's clock at the time of arrival, measured in the same units. If S_i is the RTP timestamp from packet i, and R_i is the time of arrival in RTP timestamps units for packet i, then for two packets i and j the inter-arrival jitter D can be expressed as:</p> $D(i,j) = (R_j - R_i) - (S_j - S_i)$ <p>The interarrival jitter is calculated continuously as each data packet i is received from source $SSRC_n$, using this difference D for that packet and the previous packet $i-1$ in order of arrival (not necessarily in sequence), according to the formula</p> $J(i) = J(i-1) + (D(i-1,i) - J(i-1))/16 \text{ or } 8$																																		
Downlink Packet Drop Rate	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call originating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE)</p>																																		
Uplink Packet Drop Rate	<p>Number of RTP (Real-time Transport Protocol) Packets lost divided by total RTP packet received (against each source_SSRC and sequence number) at call terminating handset. This KPI is calculated from MOS call for packet call only (VoNR/VoLTE).</p>																																		
Signal Strength	<p>Signal strength is the signal power level received by the wireless user.</p> <table border="1"> <thead> <tr> <th rowspan="2">Parameter Name</th> <th rowspan="2">Technology</th> <th colspan="4">Signal Strength (dBm)</th> </tr> <tr> <th>Excellent</th> <th>Good</th> <th>Fair</th> <th>Poor</th> </tr> </thead> <tbody> <tr> <td>Rx Level</td> <td>GSM</td> <td>0 to ≥ -65</td> <td><-65 to ≥ -75</td> <td><-75 to ≥ -85</td> <td><-85 to min</td> </tr> <tr> <td>RSCP</td> <td>WCDMA</td> <td>0 to ≥ -70</td> <td><-70 to ≥ -80</td> <td><-80 to ≥ -90</td> <td><-90 to min</td> </tr> <tr> <td>RSRP</td> <td>LTE</td> <td>0 to ≥ -80</td> <td><-80 to ≥ -95</td> <td><-95 to ≥ -110</td> <td><-110 to min</td> </tr> <tr> <td>SS_RSRP</td> <td>NR</td> <td>0 to ≥ -80</td> <td><-80 to ≥ -95</td> <td><-95 to ≥ -110</td> <td><-110 to min</td> </tr> </tbody> </table>	Parameter Name	Technology	Signal Strength (dBm)				Excellent	Good	Fair	Poor	Rx Level	GSM	0 to ≥ -65	<-65 to ≥ -75	<-75 to ≥ -85	<-85 to min	RSCP	WCDMA	0 to ≥ -70	<-70 to ≥ -80	<-80 to ≥ -90	<-90 to min	RSRP	LTE	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min	SS_RSRP	NR	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min
Parameter Name	Technology			Signal Strength (dBm)																															
		Excellent	Good	Fair	Poor																														
Rx Level	GSM	0 to ≥ -65	<-65 to ≥ -75	<-75 to ≥ -85	<-85 to min																														
RSCP	WCDMA	0 to ≥ -70	<-70 to ≥ -80	<-80 to ≥ -90	<-90 to min																														
RSRP	LTE	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min																														
SS_RSRP	NR	0 to ≥ -80	<-80 to ≥ -95	<-95 to ≥ -110	<-110 to min																														

Table-67: Network performance parameter and definition voice

7.2.2 Network Performance Parameters Data tests

Parameter Name	Definition
Download Speed (Mbps)	<p>The download speed is defined as the data transmission rate that is achieved for downloading a test file from a test server to a test device.</p> <p>Download Speed = Total bytes transferred during download / Total time for transfer</p> <ul style="list-style-type: none"> 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for download throughput in dynamic drive and Hotspot combine data
Upload Speed (Mbps)	<p>The upload speed is the data transmission rate that is achieved for uploading a test file from a test device to a test server.</p> <p>Upload Speed = Total bytes transferred during upload / Total time for transfer.</p> <ul style="list-style-type: none"> 80th percentile (upper range) & 20th percentile (lower range) value has been calculated for upload throughput in dynamic drive and Hotspot combine data.
Download Session Setup Success Rate	<p>(total download session established (successfully connected to server)/ total download session attempt) *100.</p> <p>This KPI has been calculated for Hotspot only.</p>

Upload Session Setup Success Rate	(total upload session established (successfully connected to server)/ total upload session attempt)*100. This KPI need to report for Hotspot only.
Web Page Download Time	Web browsing test is used to measure performance in terms of opening a web/HTTP page. Time taken to open the web page successfully is considered as web browsing delay/web page download time.
Video Streaming Delay	The Video streaming delay is time taken from start of video transfer to First video frame displayed in player.
Latency (TWAMP-UDP)	Latency is the time it takes for a small data set to be transmitted from a device to a server on the Internet and back to the same device again. The Latency is measured in milliseconds (ms). To calculate the one-way latency, we just do half of the round-trip time. 50th percentile of one-way latency has been reported.
Jitter (TWAMP-UDP)	Measure of variation in time in arrival of packets from a source to destination The consideration of packet delay jitter is considered by standard deviation of Inter Packet Delay Variation. If IPDV is used. By standard deviation is meant the average of standard deviation of IPDV on DL $\text{IPDV}(i) = D(i) - D(i-1)$ then Stdvs of IPDV is considered as jitter.
Packet Loss Rate (TWAMP-UDP & TCP)	Number of packets lost out of total packet transferred during test. Packet loss rate = (Total packet lost / Total packet sent) *100 * Packet delay (using TWAMP-UDP & TCP) >90 ms considered as packet loss and included in packet loss rate. * Packet loss rate is calculated based on TWAMP-UDP & TCP. *90 th percentile for Packet loss rate has been reported in overall Hotspot performance summary.

Table-68: Network performance parameter and definition Data

Disclaimer: The observations presented above and, in the reports, represent the performance of the service providers on the area/route under test on the day/time of conducting the drive test and no inference whatsoever may be drawn regarding the quality of the telecom service by the service providers in the whole city/state/licensed service area.